
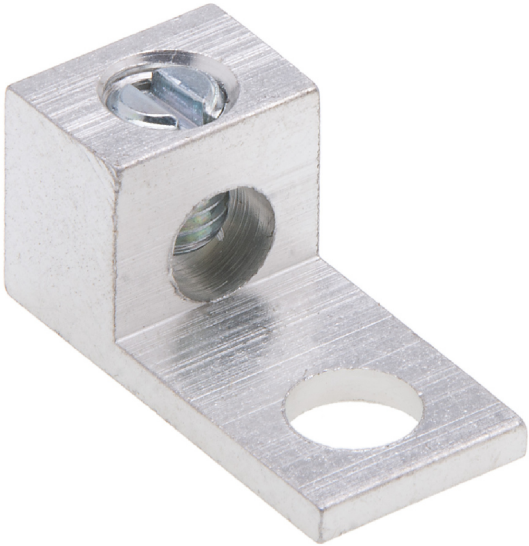
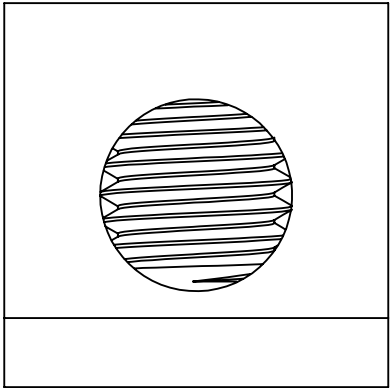


- FEATURES:
- 1. Versatile and reusable set-screw connectors made of 6061T-6 aluminum alloy.
 - 2. Electro-tin plated for low contact resistance.
 - 3. For use with copper or aluminum conductors.
 - 4. Voltage Rating: 600 V

POLARIS[®]

PROGRAM:	SOLIDWORKS
UPDATED:	03/2024
SALES REV:	A
SIZE:	B (11x17)

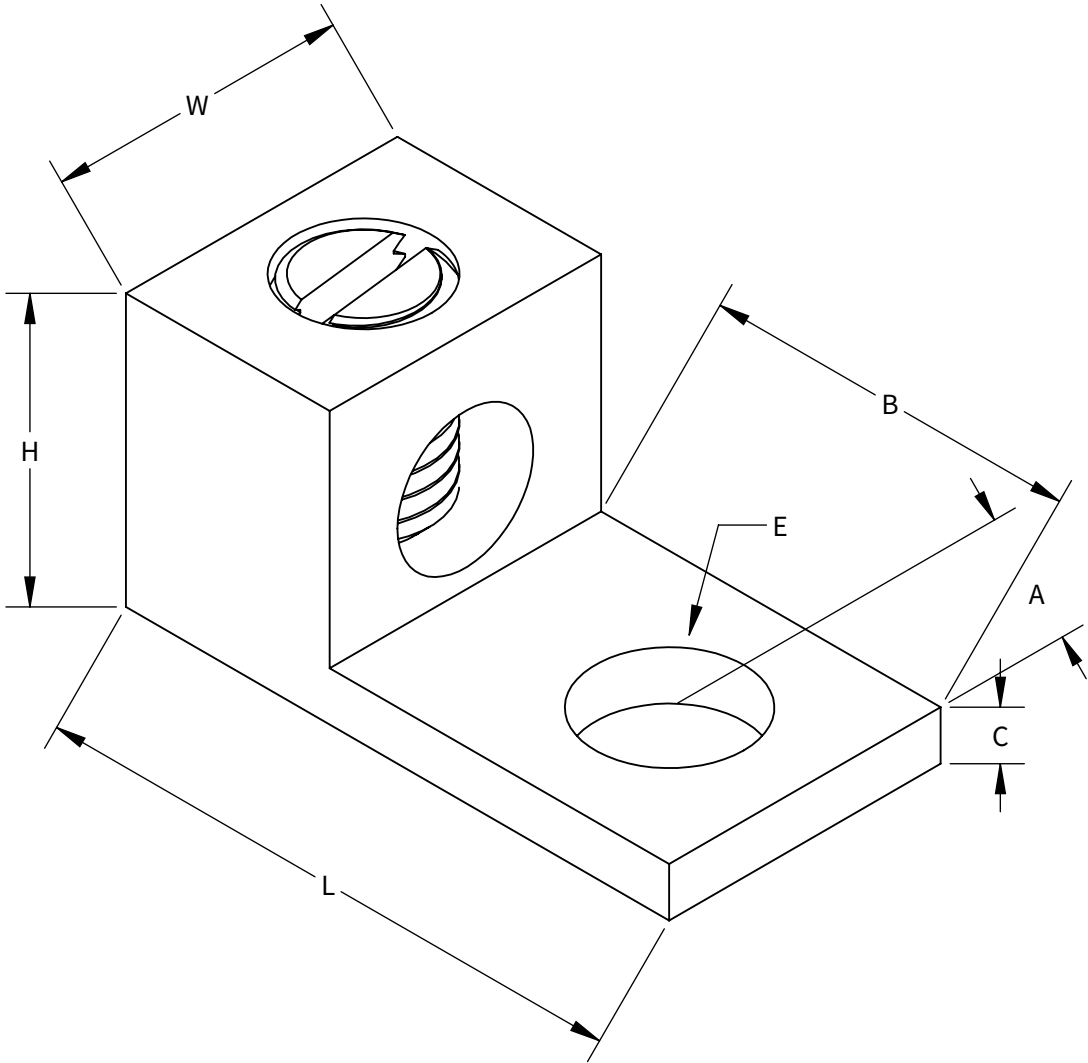

CAT. NO	WIRE RANGE	MAX TORQUE VALUE (IN./LBS.)	HEX WRENCH SIZE	MTG. BOLT SIZE	LENGTH (L)	HEIGHT (H)	WIDTH (W)	MTG. HOLE DIA. (E)	TANG LENGTH (B)	END OF CONN. TO CENTER HOLE (A)	TANG THICKNESS (C)	STD. CTN. QTY.
4TR	4 AWG – 14 AWG	50	Slotted	1/4	1.00	.500	.500	.273	.625	.250	.090	2

