


310-250

Polypropylene Splicing Tape

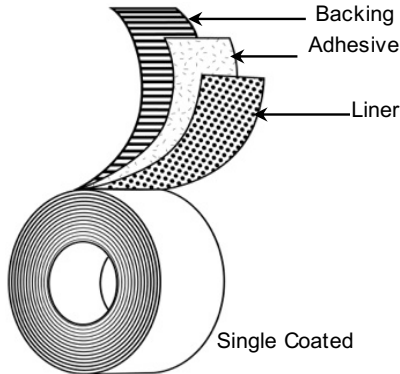

Backing: Unoriented Polypropylene

Adhesive: Acrylic

Liner: .0025" HDPE Film

Colors: Clear

Specifications: N/A

Size Options: Incremental sizes 1.5" - 54" x LY

Applications

- Containment wrap during the encapsulation of telecommunications splices in the field

Features

- Unoriented Polypropylene Film
- Acrylic Adhesive
- HDPE Film Liner

Benefits

- Strong and rigid
- Easy to apply in the field
- Excellent quick stick and shear strength
- Excellent temperature resistance
- Allows wide-width use and ease of application

Typical Test Values

	Standard UOM		Metric UOM		Test Method
Total Thickness	6.0	mils	0.152	mm	PSTC-133
Substrate Thickness	5.0	mils	0.127	mm	PSTC-133
Adhesion to Steel	75	oz/in	8.21	N/cm	ASTM D-3330
Tensile Strength	30	lb/in	52.54	N/cm	ASTM D-3759
Elongation	800%				
Application Temperature	40 to 120 °F		4 to 49 °C		
Operating Temperature	-40 to 200 °F		-40 to 93 °C		

Recommended Storage Conditions: 40-60% Humidity, 60 - 80 °F

Standard Shelf Life (at 25 °C): 12 months from shipment date

The information presented herein was prepared at BERRY GLOBAL, INC. by qualified technical personnel. To Berry Global's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY GLOBAL assumes any legal responsibility.