
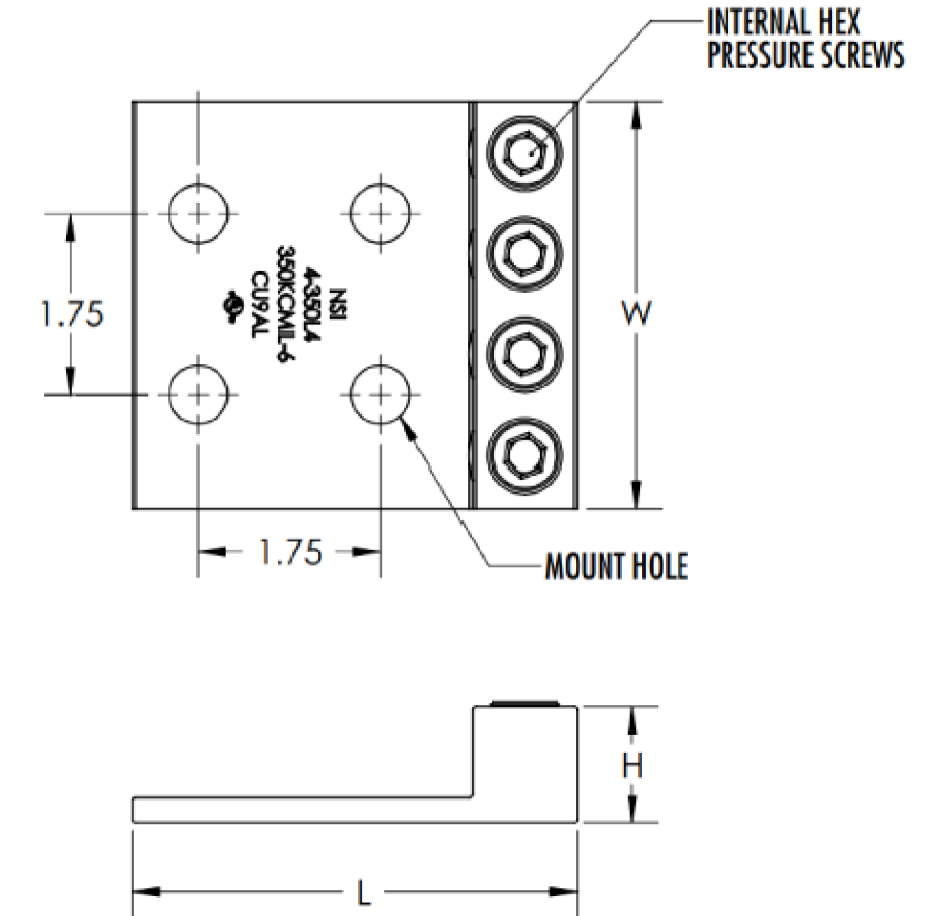


- FEATURES:**
1. Versatile and reusable set-screw connectors made from high strength 6061-T6 aluminum alloy for superior electrical and mechanical performance.
  2. Two set-screws per wire hole ensure an exceptional connection.
  3. Electro-tin plated for low contact resistance.
  4. For use with copper or aluminum conductors.
  5. Mounting hole spacing is NEMA 1 3/4" spacing.

- SPECIFICATIONS:**
1. Meets or exceeds ANSI C119.4 Class A. AL9CU
  2. Temperature Rating: 90 °C. AL9CU.
  3. Voltage: 600V max.

## LL Series : Aluminum, Dual Rated, Heavy Duty Transformer Lugs

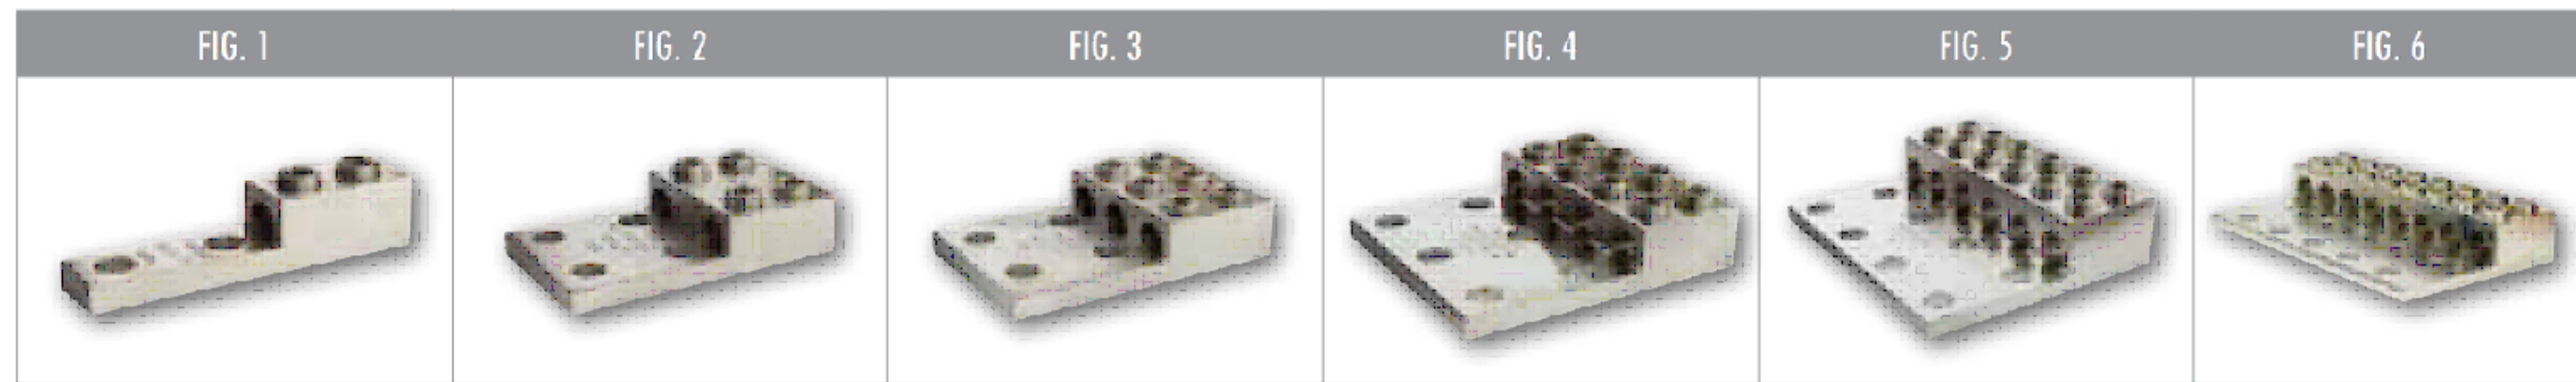

CAT. NO.	FIG. NO.	WIRE RANGE	MAX. TORQUE VALUE (IN./LBS.)	NO. OF CONDUCTORS	NO. OF MTG. HOLES	MTG. HOLE DIA. (IN.)	MTG. HOLE SPACING (IN.)	HEX WRENCH SIZE (IN.)	BOLT SIZE (IN.)	LENGTH (L) (IN.)	WIDTH (W) (IN.)	HEIGHT (H) (IN.)
350LL2	1	350 MCM-6 AWG	400	1	2	0.563	1.750	3/8	1/2	5.130	1.130	1.380
2-350LL4	2	350 MCM-6 AWG	400	2	4	0.563	1.750	3/8	1/2	5.130	2.000	1.380
3-350LL4	3	350 MCM-6 AWG	400	3	4	0.563	1.750	3/8	1/2	5.130	2.940	1.380
4-350LL6	4	350 MCM-6 AWG	400	4	6	0.563	1.750	3/8	1/2	5.130	3.870	1.380
6-350LL8	5	350 MCM-6 AWG	400	6	8	0.563	1.750	3/8	1/2	5.130	5.750	1.380
8-350LL8	6	350 MCM-6 AWG	400	8	8	0.563	1.750	3/8	1/2	5.130	7.260	1.380
8-350LL10	6	350 MCM-6 AWG	400	8	10	0.563	1.750	3/8	1/2	5.130	7.620	1.380
2-600LL4	2	600 MCM-2 AWG	550	2	4	0.563	1.750	3/8	1/2	5.875	2.410	1.562
4-600LL6	4	600 MCM-2 AWG	550	4	6	0.563	1.750	3/8	1/2	5.875	4.780	1.562
6-600LL6	6	600 MCM-2 AWG	550	6	6	0.563	1.750	3/8	1/2	8.750	5.750	1.750
2-800LL4	2	800-300 MCM	550	2	4	0.563	1.750	1/2	1/2	6.188	2.737	1.875
4-800LL8	4	800-300 MCM	550	4	8	0.563	1.750	1/2	1/2	6.188	5.487	1.875
2-1000LL4	2	800-300 MCM	550	2	4	0.563	1.750	1/2	1/2	6.188	2.982	1.875
4-1000LL8	4	1000-500 MCM	600	4	8	0.563	1.750	1/2	1/2	6.188	5.982	1.875
8-1000LL12	6	1000-500 MCM	600	8	12	0.563	1.750	1/2	1/2	6.188	11.982	1.875