




NOTES:

- 1.) PART A IS PLATED ELECTROLESS NICKEL .0001 MIN-.0003 MAX.
- 2.) PART UP IS UNPLATED
- 3.) BREAK ALL SHARP CORNERS
 4.) REF. BAR-36 (2" HEX X 1.290 I.D.))

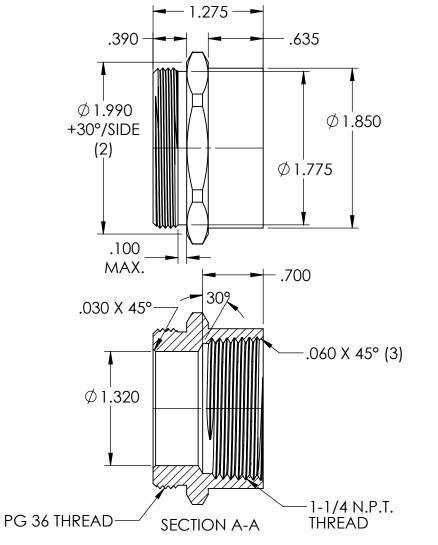

	.,					
	REV.	DATE	CHANGE		UNLESS OTHERWISE SPECIFIED:	
	Α	2/5/02	DRAWING RELEASED C.V.		IOLERANCES:	DRAWI
ŀ					FRACTIONAL ± 1/64 ANGULAR: MACH ± 1° BEND ± 1°	CHECK
	В	2/7/02	REVISED PLATING SPECS. "D" BORE DEPTH WAS THREAD DEPTH "F" DIM 1.32 WAS 1.290		ONE PLACE DECIMAL ±.015 TWO PLACE DECIMAL ±.010	ENG A
	С	2/18/02				MFG A
	D	5/30/02			INTERPRET GEOMETRIC TOLERANCING PER:	Q.A.
	Е				MATERIAL ALUMINUM	THE INFO
	F	7/30/15	REDRAWN		NICKEL PLATED	REMKE I IN PART WRITTEN
					DO NOT SCALE DRAWING	IS PROH
	5 4				3	

NAME DATE JCN 7/15 CKED APPR. APPR.

ROPRIETARY AND CONFIDENTIAL

FORMATION CONTAINED IN THIS ING IS THE SOLE PROPERTY OF INDUSTRIES. ANY REPRODUCTION RT OR AS A WHOLE WITHOUT THE EN PERMISSION OF REMKE INDUSTIRES

REMKE INDUSTRIES 310 CHADDICK DR, WHEELING, IL. 60090

TITLE:

2

ADAPTER

SIZE DWG. NO.

RAPG-36M125F-A

SCALE: 0.9:1 SHEET 1 OF 1