


NOTES:

- 1.) PART A IS PLATED ELECTROLESS NICKEL .0001 MIN-.0003 MAX.
- 2.) PART UP IS UNPLATED
- 3.) BREAK ALL SHARP CORNERS
- 4.) REF. BAR-36 (2" HEX X 1.290 I.D.)

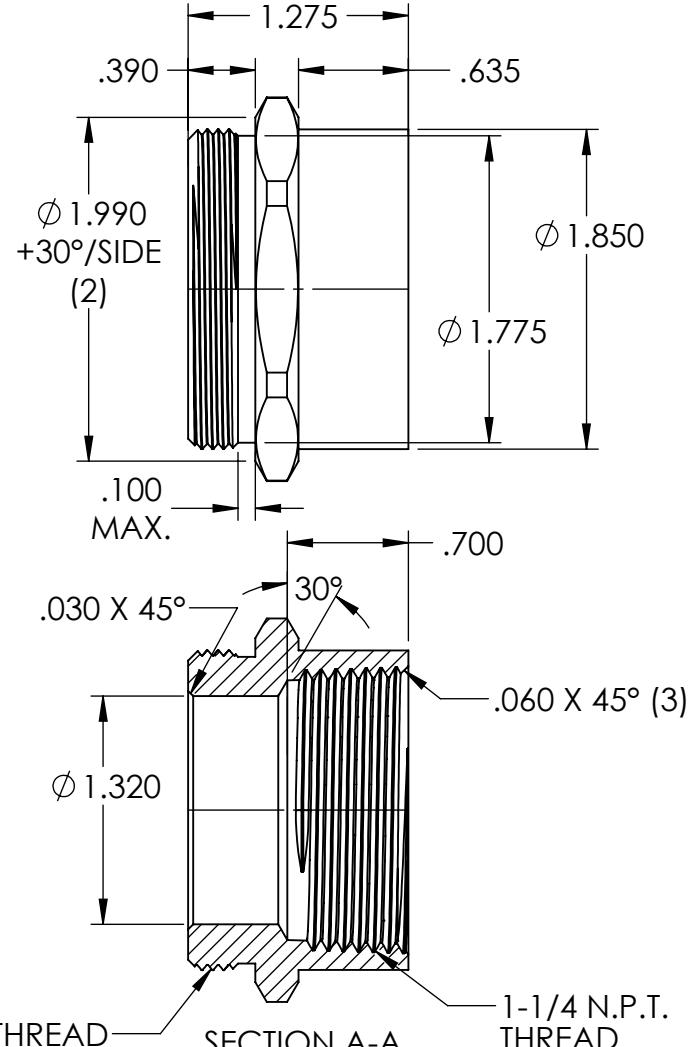

PG 36 THREAD

SECTION A-A

1-1/4 N.P.T.
THREAD

REV.	DATE	CHANGE
A	2/5/02	DRAWING RELEASED C.V.
B	2/7/02	REVISED PLATING SPECS.
C	2/18/02	"D" BORE DEPTH WAS THREAD DEPTH
D	5/30/02	"F" DIM 1.32 WAS 1.290
E	2/11/03	"H" DIA. 1.775 WAS 1.780
F	7/30/15	REDRAWN

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL $\pm 1/64$ ANGULAR: MACH $\pm 1^\circ$ BEND $\pm 1^\circ$ ONE PLACE DECIMAL $\pm .015$ TWO PLACE DECIMAL $\pm .010$ THREE PLACE DECIMAL $\pm .005$		
INTERPRET GEOMETRIC TOLERANCING PER:		
MATERIAL	FINISH	DO NOT SCALE DRAWING
ALUMINUM	NICKEL PLATED	

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
REMKE INDUSTRIES. ANY REPRODUCTION
IN PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF REMKE INDUSTRIES
IS PROHIBITED.

B BRIDGEPORT

TITLE:

ADAPTER

SIZE DWG. NO.
A RAPG-36M125F-A
SCALE: 0.9:1 SHEET 1 OF 1