



SUBMITTAL DATA SHEET

Silent+ Mini White

Mini Split Condensate Pump Kit
Univolt 100-250VAC, 50/60Hz

Project Information:

Job Name:

Location:

Engineer:

Contractor:

Distributor:

Submitted to:

For: **Reference** **Approval** **Construction**

Submitted by:

Reference:

Submittal Information:

Approval:

Date:

Construction:

Contractor:

Distributor:

Unit #:

Drawing #:

Estimated Qty:

(Sec. I) Product Specifications:

Max. flow	12 US Gallons (45L/h) @ 0m head
Max. rec. head	33ft. / 10m
Min. dB(A) @ 1m	16dB(A)*
Power supply	100-250V, 50/60Hz, 0.18A, 2.1W
Rated	Continuous
Class	II
Max. unit output	46kW / 157,000BTU/h / 13 tons
Max. ambient temp	104°F (40°C)
IP Protection	IP24
Inlet o/d	5/8" (16mm)
Outlet o/d	1/4" (6mm)
Safety switch	High level safety wires NC/NO contacts, 5A max
Self priming	✓

Ensure ALL cleaning chemicals are flushed out of the reservoir after use.

*Assuming solid wall construction with a 2kW unit.

(Sec. II) Ordering Information:

Product	FP3400/MG
Model	Silent+ Mini White (5th Gen)
Carton Qty	Qty: 1
Carton Weight	1.57 lbs.

(Sec. III) Carton Contents:

Silent+ Mini White 5th Gen Pump
(incl. hardwired 5' (1.5m) power cable)
Fitting Template (on the box)
Spacer
Outlet Coupler
Outlet Elbow
Anti Siphon Device
Fixing Pads
1 Amp Fuse
Quick Start Guide


(Fig. I) Product Image:



(Fig. II) Typical Pump Locations:

Mounted under mini split equipment
– left or right handed

Silent+ Mini White 100-250 VAC, 50Hz/60Hz

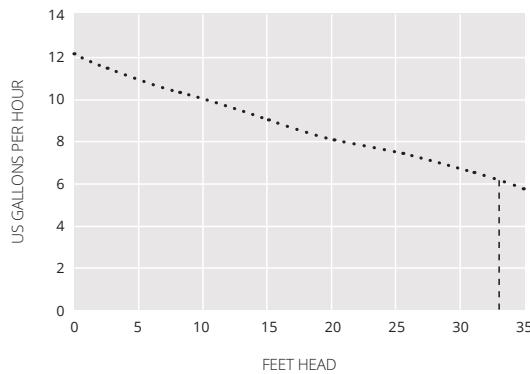

Pump
Selector
and Wiring
Diagrams
available at:
malcogp.com

