
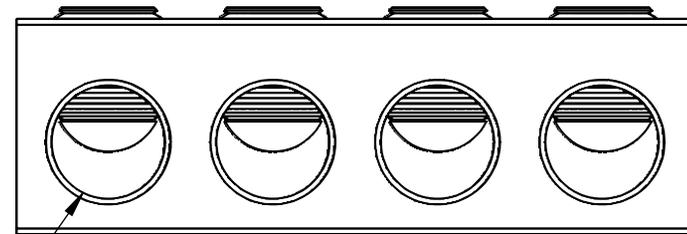


PL4-4 SHOWN

PART NUMBER	NO. OF PORTS	LENGTH
PL4-2	2	.88
PL4-3	3	1.30
PL4-4	4	1.73
PL4-5	5	2.15
PL4-6	6	2.57
PL4-8	8	3.41



WIRE ENTRY PORT  
 WIRE RANGE: #4 - #14 AWG  
 PRE-FILLED W/ OXIDE INHIBITOR

NOTES:

- CONNECTOR MANUFACTURED FROM 6061-T6 ALUMINUM ALLOY.
- CONNECTOR CHROMATED FOR INCREASED CORROSION RESISTANCE.
- UL LISTED PER UL486A/B SPECIFICATIONS FOR 600V.
- DUAL RATED FOR 90°C COPPER AND/OR ALUMINUM CONDUCTOR.

		<b>POLARIS</b> SALES . CO . INC	
PROPRIETARY AND CONFIDENTIAL		11625 PROSPEROUS DRIVE ODESSA, FL 33556	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLARIS SALES CO. INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF POLARIS SALES CO. INC. IS PROHIBITED.		<b>TITLE:</b> UNINSULATED #4 CONNECTOR	
NAME		DATE	
DRAWN BY L. HILL		07-14-10	
<b>MATERIAL:</b> N/A		<b>SCALE:</b> N/A	
<b>DWG. NO.</b>		PL4-	
<b>SHEET:</b> 1 OF 1			