

FEATURES:**FQC Series**

1. Nickel plated.
2. 0.250 x 0.30 tab size.
3. 22-14AWG wire size.

DR Series

1. Made from 35mm unplated 6061-T6 Aluminum alloy providing for a strong, lightweight rail for mounting sockets, terminal blocks or other electro-mechanical devices.
2. Comes supplied with oval holes 1.1 cm, approximately x 0.4 cm apart.
3. Standard 10mm height allows for ease of installation vs. traditional 7.5mm height.

POLARIS[®]

PROGRAM:	SOLIDWORKS
UPDATED:	09/2024
SALES REV:	A
SIZE:	B (11x17)


SPECIFICATIONS:**FQC Series:**

1. Voltage: 30AMP, 600V Max.

DR Series:

1. CSA.
2. UL Recognize.

FQC, DR Series: Hardware Options

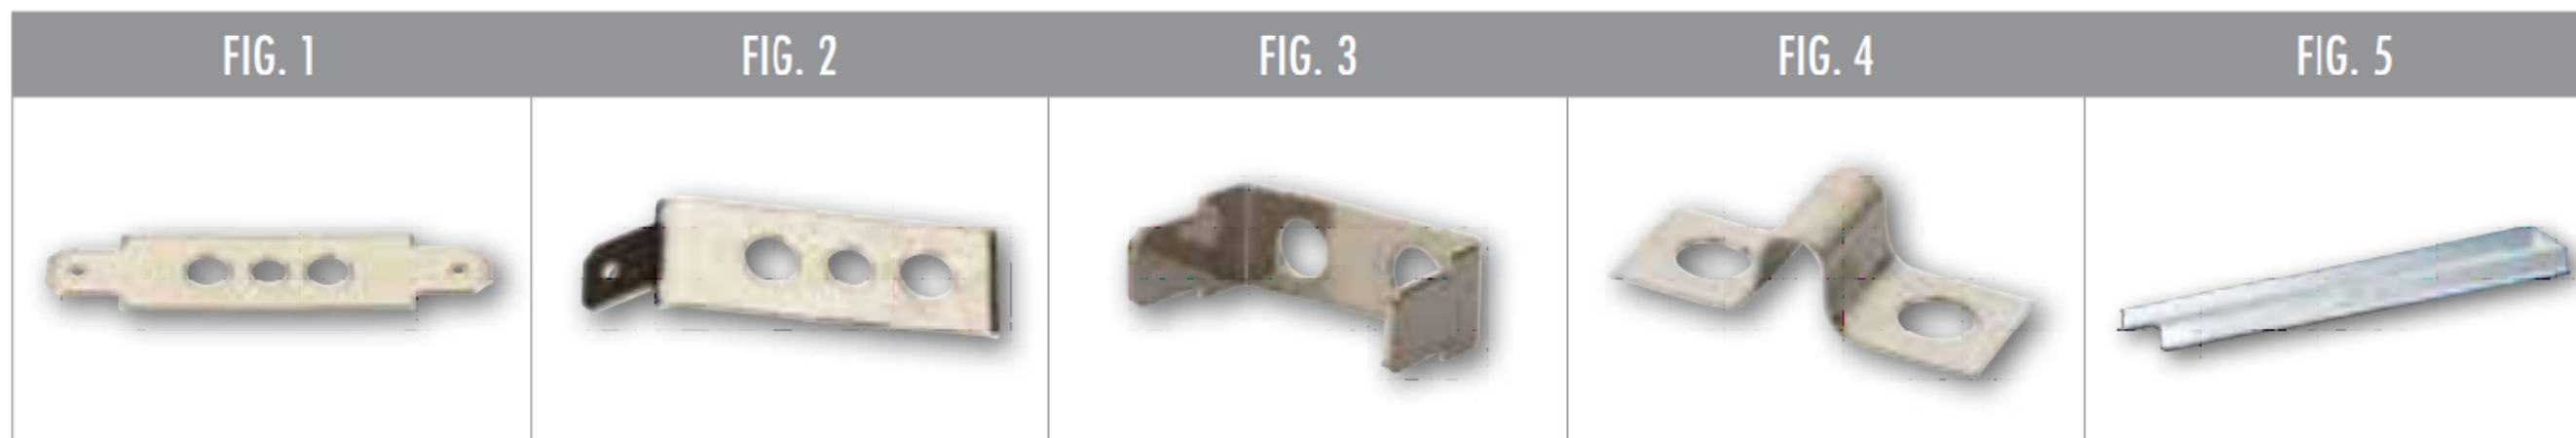

CAT.NO.	FIG. NO.	DESCRIPTION	HEIGHT	LENGTH	STD. CTN. QTY
FQC-00	1	Quick Disconnect – 0° Flat	-	-	10
FQC-45	2	Quick Disconnect – 45° Bend	-	-	10
FQC-90	3	Quick Disconnect – 90° Bend	-	-	10
J-30	4	30 AMP Jumper	-	-	10
DR3910	5	For Mounting Sockets, Terminal Blocks, Or Other Electro-Mechanical Devices	10 mm	39.3”	10