


Clean Removal Duct Tape

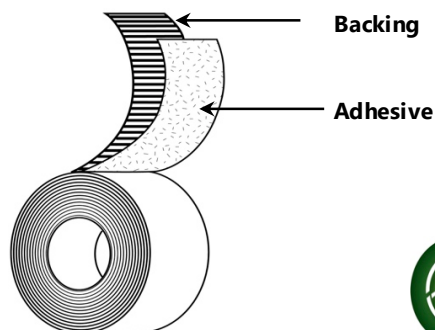

Backing:	PE Coated Cloth
Adhesive:	Rubber
Liner:	N/A
Colors:	Slate Blue, Red
Specifications:	MIL-STD-2041F Compliant
Standard Sizes:	48mm x 55m, 72mm x 55m

Applications

- Multiple uses in powerplants and on ships
- Heavy-duty packaging and bundling
- Color coding
- Media-blast protection
- Holding dosimeters, securing clothing and gloves, wrapping pipe ends, insulation & duct sealing

Features

- PE-Coated Cloth Backing
- Natural Rubber-Based Adhesive

Benefits

- High tensile strength for difficult applications
- Abrasion and puncture resistant
- Crisp, straight tear
- UV resistant for 6 months
- Aggressive adhesion - including adhesion to extremely rough materials
- Clean removal with little or no residue for up to 6 months from most surfaces

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness	11.5 mils	0.290 mm	ASTM D-1000
Adhesion to Steel	80 oz/in	8.85 N/cm	PSTC-101
Tensile Strength	26 lb/in	46.00 N/cm	ASTM D-1000
Operating Temperature	40 to 200 °F	4 to 93 °C	
Adhesion to Backing	45 oz/in	5.00 N/cm	PSTC-101
Flame Spread Index	15		ASTM E84
Smoke Developed Index	30		ASTM E84

Standard Shelf Life (at 25 °C): 36 months from date of manufacture.

The information presented herein was prepared at BERRY GLOBAL, INC. by qualified technical personnel. To Berry Global's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which Berry Global assumes any legal responsibility.