



Toll Free: 87 PERMATEX  
(877-376-2839)

6875 Parkland Boulevard, Solon  
Ohio 44139

## Technical Data Sheet

### Permatex® Rust Dissolver Gel

AAM Revised 04/26

#### PRODUCT DESCRIPTION

Permatex® Rust Dissolver Gel is an acid-based, thixotropic liquid designed to chemically dissolve rust from iron and steel surfaces. The gel formula clings to vertical and hard-to-reach areas for effective treatment and is easily applied by brushing onto the surface and rinsing off with water. It eliminates the need for aggressive sanding or scraping and contains no ozone-depleting compounds. For optimal long-term protection, follow with Permatex® Rust Treatment to help prevent new rust from forming.

#### PRODUCT BENEFITS


- Eliminates scraping
- Washes off with water
- Ideal for preparing surfaces prior to painting

#### TYPICAL APPLICATIONS

- Dissolves rust from ferrous metals and ferrous alloys including:
  - Automotive frames and under-bodies
  - Rocker panels
  - Wheel wells

#### DIRECTIONS FOR USE

1. Wear rubber gloves when applying.
2. Scrape or wipe loose dirt and rust flakes from surface. Sand with coarse sandpaper or wire brush.
3. Pour dissolver gel into a separate container to prevent contamination.
4. Brush dissolver on rust liberally and work into pitted areas.
5. Leave on rusted surfaces for 5-10 minutes.
6. Wipe off painted surfaces and rinse off gel with fresh water.
7. Repeat applications as necessary for heavily rusted areas. Allow product to remain on surface longer if necessary. \*Limit applications to five minutes for chrome or plated surfaces.

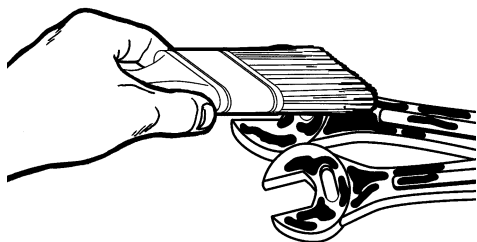

Chemical Type  
Appearance  
Odor  
Specific Gravity  
Viscosity  
Flash Point °C (°F)

**Typical Value**  
Phosphoric acid  
Pink  
Bouquet  
1.2  
Gel  
None

#### GENERAL INFORMATION

**This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected for use with chlorine or other strong oxidizing materials.**

**For safe handling information on this product, consult the Material Safety Data Sheet, (MSDS).**

#### ORDERING INFORMATION

Part Number	Container Size
81756	8 fl. oz. bottle

#### STORAGE

Products shall be ideally stored in a cool, dry location in unopened containers at a temperature between 8° to 28°C (46° to 82°F) unless otherwise labeled. Optimal storage is at the lower half of this temperature range. To prevent contamination of unused product, do not return any material to its original container.

#### NOTE

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. **Permatex, Inc. specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Permatex, Inc. products and disclaims any liability for consequential or incidental damages of any kind, including lost profits.**

#### PROPERTIES OF MATERIAL

NOT FOR PRODUCT SPECIFICATIONS.  
THE TECHNICAL DATA CONTAINED HEREIN ARE INTENDED AS REFERENCE ONLY.  
PLEASE CONTACT PERMATEX, INC., TECHNICAL SERVICE DEPARTMENT FOR ASSISTANCE AND RECOMMENDATIONS FOR YOUR SPECIFIC APPLICATION.  
PERMATEX, INC., 6875 PARKLAND BOULEVARD, SOLON, OH 44139 PHONE - (1-87PERMATEX)