



Toll Free: 87 PERMATEX
(877-376-2839)

10 Columbus Blvd., Hartford,
Connecticut 06106

6875 Parkland Boulevard, Solon
Ohio 44139

Technical Data Sheet

Permatex® Gasket Remover

AAM Revised 03/08

PRODUCT DESCRIPTION

Permatex® Gasket Remover is an aerosol product designed to remove gaskets and gasket residue from any type of metal or plastic housing. The product will also remove chemical formed-in-place gaskets. The Permatex® Gasket Remover is a safe alternative to the harsh, chlorinated and brominated solvents found in many of today's standard gasket removing chemicals.

NOTE: This product is not recommended for use on silicone gasket residue.

PRODUCT BENEFITS


- A safe alternative to chlorinated and brominated solvents
- Non-chlorinated, non-brominated
- Built in brush top to easily apply to gasket residues
- Penetrates and cleans intricate shapes
- Will not run, even on vertical surfaces
- Eliminates excessive scraping and potential damage to flanged surfaces
- Saves time and labor

TYPICAL APPLICATIONS

- Removes baked-on gaskets and gasket cements
- Removes formed-in-place gaskets
- Removes gaskets from aluminum without scraping
- Removes gaskets from small, difficult to reach areas

DIRECTIONS FOR USE

1. Provide adequate ventilation.
2. Protect painted and non-metal surfaces from overspray. The product will remove paint.
3. Shake can well. For best results, the aerosol can should be at room temperature before spraying.
4. Apply Gasket Remover by depressing pad to angle brush. Using brush, spread Gasket remover over gasket residue.

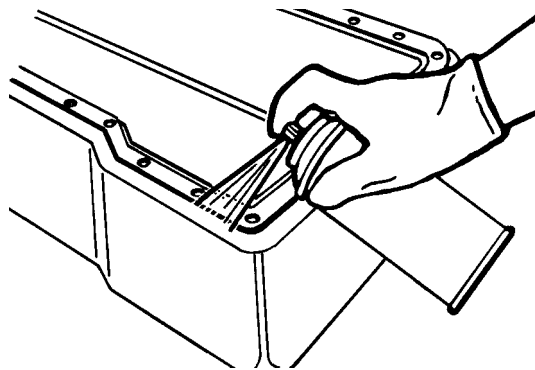

5. Allow to set for at least 15 minutes (for anaerobic

gaskets, allow to set for 20 to 30 minutes). Remove dissolved gasket with a plastic scraper and rags. Re-apply if necessary.

6. Prep flange for new gasket by cleaning with Permatex® Brake and Parts Cleaner.

For Cleanup

1. Clean hands with Permatex® brand hand cleaners.

PROPERTIES OF MATERIAL

Chemical Type
Appearance
Odor
Specific Gravity
Flash Point, PMCC °F

Typical Value
Di-basic esters
White foam
Slight solvent
1.07
>200

GENERAL INFORMATION

This product is not recommended for use in pure oxygen and/or oxygen rich systems.

For safe handling information on this product, consult the Material Safety Data Sheet, (MSDS).

ORDERING INFORMATION

Part Number	Container Size
80645	4 oz. aerosol, carded

STORAGE

Products shall be ideally stored in a cool, dry location in unopened containers at a temperature between 8° and 28°C (46° and 82°F) unless otherwise labeled. Optimal storage is at the lower half of this temperature range.

NOTE

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. **ITW Permatex, Inc. specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Permatex, Inc. products and disclaims any liability for consequential or incidental damages of any kind, including lost profits.** This product may be covered by one or more United States or foreign patents or patent applications.

NOT FOR PRODUCT SPECIFICATIONS.

THE TECHNICAL DATA CONTAINED HEREIN ARE INTENDED AS REFERENCE ONLY.
PLEASE CONTACT PERMATEX, INC., TECHNICAL SERVICE DEPARTMENT FOR ASSISTANCE AND RECOMMENDATIONS FOR YOUR SPECIFIC APPLICATION.
PERMATEX, INC., HARTFORD SQUARE NORTH, 10 COLUMBUS BOULEVARD, HARTFORD, CT 06106 PHONE - (1-877)PERMATEX