


**FEATURES:**

1. High strength solderless service connector made of high-copper alloy for copper and copperweld wires
2. Type for two maximum wire sizes

## N Series: Copper Split Bolts

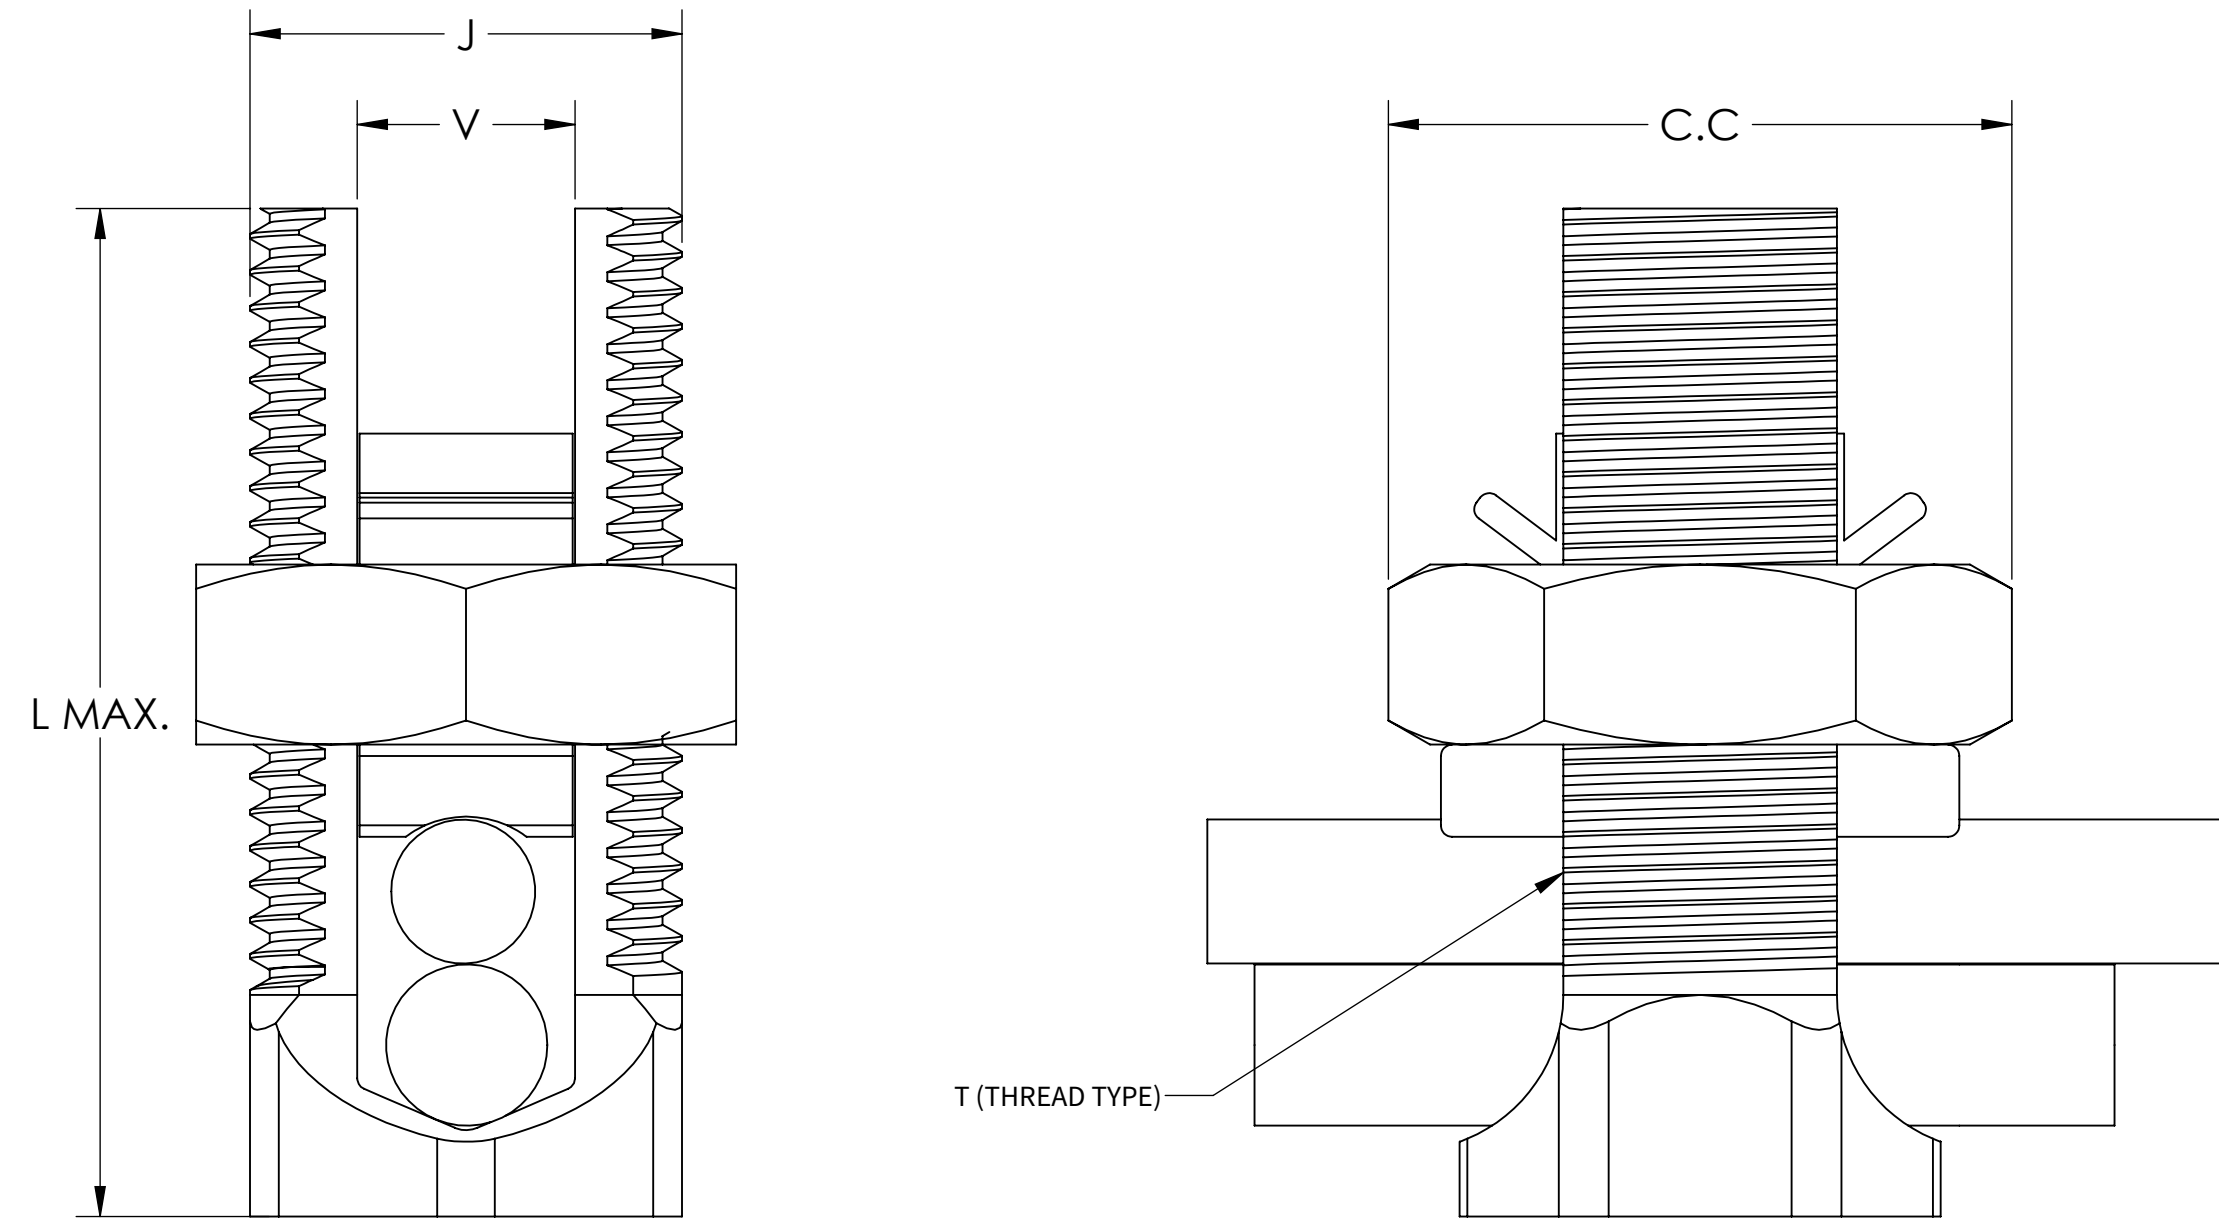

CAT NO.	J	L MAX.	V	C.C (A/F)	T (THREAD TYPE)	RANGE OF EQUAL MAIN & TAP		MIN TAP WITH ONE MAX MAIN	WIRE DIAMETER RANGE (IN)	QTY.
						MIN	MAX			
N-4R	.485	1.00	.225	0.6875	1/2-20 UNF	8 SOL	4 SOL	16 SOL	.5x.375"	2
N-6R	.4375	1.0625	.180	.625	7/16-20 UNF	10 STR	6 SOL	16 SOL	.375"	2
N-8R	0.375	0.875	.150	.500	3/8-24 UNF	16 STR	8 STR	16 STR	.75"	2