


850UV

UV Resistant Duct Tape

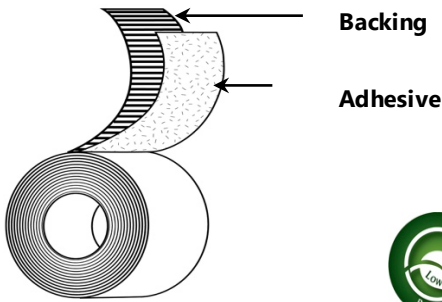

Backing: PE Coated Cloth
Adhesive: Rubber
Liner: N/A
Colors: Red, White, Silver
Specifications: N/A
Standard Sizes: 48mm x 55m

Applications

- Masking of construction materials such as vinyl, wood, aluminum, and anodized metals
- Protecting windows and doors during stucco applications
- Bundling, patching, and mending
- Long-term outdoor repairs

Features

- PE-Coated Cloth Backing
- Natural Rubber Adhesive
- Low VOC Content

Benefits

- Excellent UV resistance for long-term outdoor applications
- Clean, crisp, straight tear
- Aggressive adhesion to rough surfaces
- Clean removal, no residue for at least 30 days
- Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED[®]

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness	9.0 mils	0.23 mm	ASTM D-1000
Adhesion to Steel	80 oz/in	8.75 N/cm	PSTC-101
Tensile Strength	30 lb/in	54.5 N/cm	ASTM D-1000
Elongation	20%		
Operating Temperature	40 to 200 °F	4 to 93 °C	
VOC Content	<1 g/L		

Recommended Storage Conditions: 60-80 °F at 40-60% RH
 Standard Shelf Life (at 25 °C): 36 months from date of manufacture.

The information presented herein was prepared at BERRY GLOBAL (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are typical values submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.

2320 Bowling Green Road | Franklin, KY 42134
 1-800-343-7878 Fax 1-800-328-4822
www.vybond.com