
FEATURES:

- Material: Tin Plated Aluminum UL listed for U.S. & Canada.


- Wire connector rated for 35Kv max.
 Class B/C compressed, concentric, and compact conductor.
 Dual rated AL9CU.
- Expanded wire range when installed with dieless NSi compression tool (N12ID).
- Dimensions are for reference only, tolerance is +/- .06".V






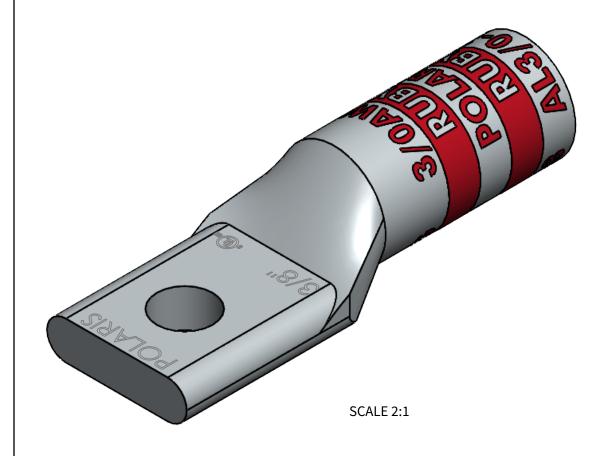

PROGRAM: SOLIDWORKS **UPDATED:** 4/2022 SALES REV: A **SIZE:** B (11x17)

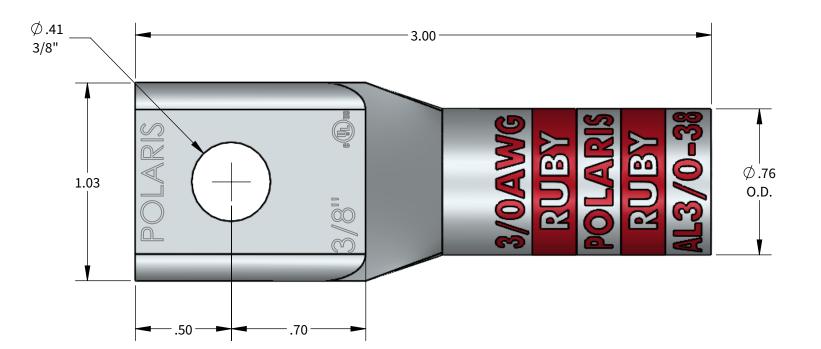

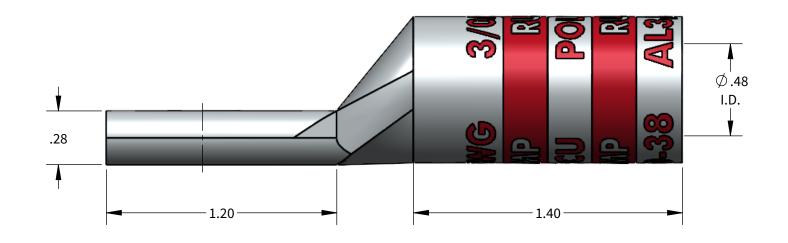

_L		
+		
-		

STRIP LENGTH

1-7/16"

DIE COLOR

RUBY

WIRE SIZE

3/0AWG

NSI		GREENLEE	BURNDY
EXPANDED WIRE RANGE W/ N12ID	N1240 SERIES	1240 SERIES	Y-35, Y750, PAT 750
3/0AWG-#2AWG	KA12-3/0 (2)	KA12-3/0 (2)	U27ART (2)

ALUMINUM COMPRESSION CONNECTOR TOOL AND DIE CHART (# OF CRIMPS)