


FEATURES:

1. These stacked neutral assemblies offer the ultimate in compact design and performance.
2. Wire holes are stacked to minimize width. One-piece construction provides superior mechanical performance
3. Made from high strength 6061T-6 aluminum alloy
4. Options include a 350 mcm main lug and a high strength, glass-filled polyester mounting base for isolated mounting.
5. Available in 12 to 42 wire holes (4-14 awg).



PROGRAM:	SOLIDWORKS
UPDATED:	09/2024
SALES REV:	A
SIZE:	B (11x17)

1024 Series: Neutral 225A 600 VAC

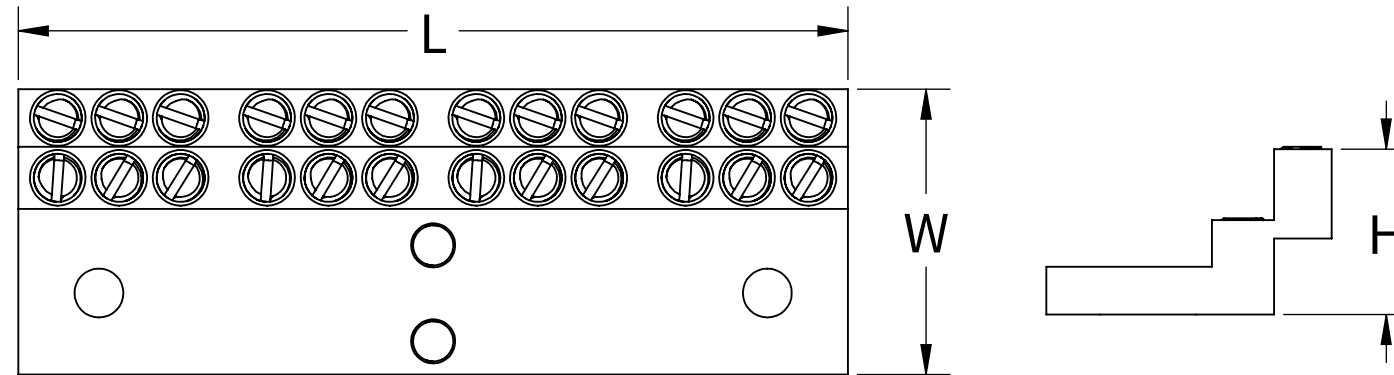

CAT. NO.	FIG. NO.	NO. OF 4-14 AWG CIRCUIT	MAIN LUG SIZE	MOUNTING BASE	LENGTH (IN.)	HEIGHT (IN.)	WIDTH (W)
1012	1	12	NONE	NO	2.068	0.875	1.500
1012M	2	12	350-6	NO	2.193	1.375	1.500
1012B	3	12	NONE	YES	2.068	2.250	2.250
1012MB	4	12	350-6	YES	2.193	2.750	2.250
1018	1	18	NONE	NO	3.132	0.875	1.500
1018M	2	18	350-6	NO	3.257	1.375	1.500
1018M	3	18	NONE	YES	3.132	2.250	2.250
1018B	4	18	350-6	YES	3.257	2.750	2.250
1018MB	1	24	NONE	NO	4.196	0.875	1.500
1024	2	24	350-6	NO	4.321	1.375	1.500
1024M	3	24	NONE	YES	4.196	2.250	2.250
1024B	4	24	350-6	YES	4.321	2.750	2.250
1024MB	1	30	NONE	NO	5.260	0.875	1.500
1030	2	30	350-6	NO	5.385	1.375	1.500
1030M	3	30	NONE	YES	5.260	2.250	2.250
1030MB	4	30	350-6	YES	5.385	2.750	2.250
1036	1	36	NONE	NO	6.324	0.875	1.500
1036M	2	36	350-6	NO	6.449	1.3750	1.500
1036B	3	36	NONE	YES	6.324	2.250	2.250
1036MB	4	36	350-6	YES	6.449	2.750	2.250
1042	1	42	NONE	NO	7.388	0.875	1.500
1042M	2	42	350-6	NO	7.13	1.3750	1.500
1042B	3	42	NONE	YES	7.388	2.250	2.250
1042MB	4	42	350-6	YES	7.513	2.750	2.250

