




FEATURES

With their smooth, flat and edgeless design, Oscar family recessed luminaires become a seamless part of ceiling decor. With 3 different light modules suited for ambient and accent lighting, the Oscar family is as highly functional as it is visually appealing. Numerous ordering options allow for further functional and artistic customization. Oscar recessed luminaires are available in larger sizes with higher lumen packages making them ideal for both residential and commercial settings.

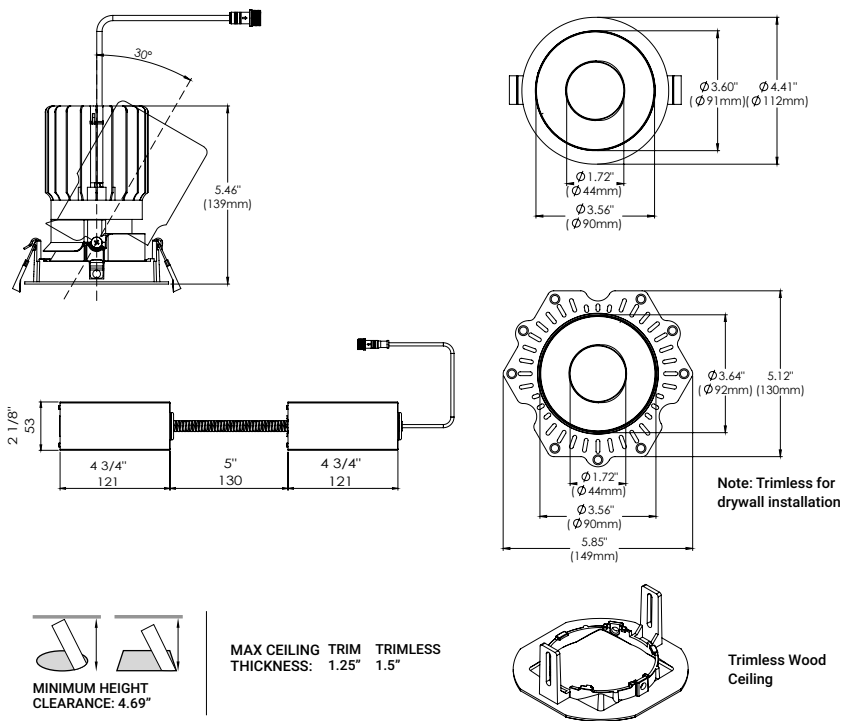

SPECIFICATIONS

FIXTURE BODY	18 gauge powder coated steel body. Aluminum powder coated trim or trimless mesh plate
INSTALLATION TYPE	Remodel/existing ceiling N/C plate, IC Box on page 2
CUT HOLE	Trim: Ø4" Trimless: Ø4" Trimless: Wood Ceiling Please contact us for detail
COLOR FINISH	Black/White/Custom
LIGHT MODULE	High output, high efficiency LED COB. Lumen Maintenance: 70% @ 50,000 hrs
INPUT VOLTAGE	120V - 277V
WATTAGE	(10W) IC Rated (15W) Non-IC Rated (26W) Non-IC Rated
POWER SUPPLY	ERP 10W, Constant Current 250mA power supply ERP 15W, Constant Current 350mA power supply ERP 26W, Constant Current 700mA power supply Minimum operating temperature: -30° Enclosed in a Junction box with 12" flexible cable to mate to module connector
ADJUSTABILITY	30°
CRI	90+
DIMMING	TRIAC/ELV/0-10V
DELIVERED LUMENS	10W IC: 760 LM, 10H IC: 1025LM, 15W Non-IC: 1360 LM, 26W Non-IC: 2080 LM
CCT OPTIONS	2700K/3000K/3500K/4000K
REFLECTORS	(N) Narrow 15°/(M) Medium 24°/(W) Wide 38°/ (F) Wide Flood 50°
DIFFUSERS	(CL) Clear/(LN) Linear Spread/(HC) Honeycomb (FR) Frosted/(SP) Solite
APPROVAL	Damp
ELECTRICAL APPROVAL	Compliant
WARRANTY	

SPECIFICATION GUIDE

OSCAR	4	SHAPE		TRIM/ TRIMLESS		FINISHES		LIGHT MODULE		BAFFLE FINISHES		WATTAGE		CCT	BEAM ANGLE		DIFFUSER		ADD-ONS	
OSC	4	R	ROUND	T	TRIM	01	BLACK	RG	RECESSED GIMBAL	01	MATTE BLACK	10	10W	27	N	15°	CL	CLEAR	EM	EMERGENCY MICRO INVERTER*
				TL	TRIMLESS	02	WHITE			02	MATTE WHITE	10 H	High Lumen 10W	30	M	24°	LN	LINEAR SPREAD		
				WC	TRIMLESS WOOD CEILING					03	GOLD	15	15W	35	W	38°	HC	HONEYCOMB	* Part# 47184-015 Sold Seperate, see page 2 for details.	
ORDERING GUIDE EXAMPLE: Oscar / 4 / Round / Trim / White / Recessed Gimbal / Chrome / 26W / 2700K / 15° Beam Angle / Clear Diffuser CODE: OSC-4-R-T-02-BG-04-26-27-N-CL										04	CHROME	26	26W	40	F	50°	FR	FROSTED		
										05	DARK CHROME						SP	SOLITE		
										06	HAZE									


ORDERING GUIDE EXAMPLE:

Oscar / 4 / Round / Trim / White / Recessed Gimbal / Chrome / 26W / 2700K / 15° Beam Angle / Clear Diffuser


CODE: OSC-4-R-T-02-RG-04-26-27-N-CL

* Part# 47184-015
Sold Sperate, see
page 2 for details.

REFLECTOR OPTIONS

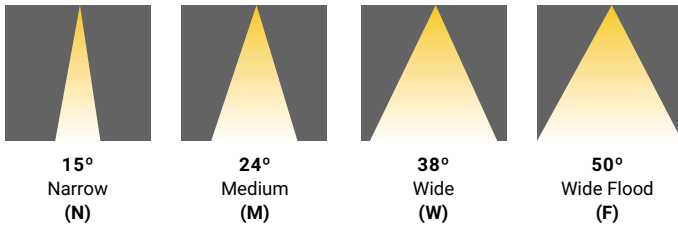

DIFFUSER OPTIONS

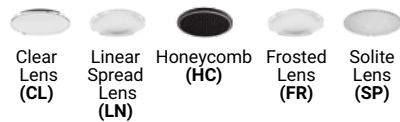

NEW CONSTRUCTION PLATES + IC BOXES





**NEW CONSTRUCTION PLATE
TRIM/TRIMLESS**
43786-015

CUT HOLE:
Trim & Trimless: Ø4"




SMASH PLATE

TRIM/ TRIMLESS
48965-019

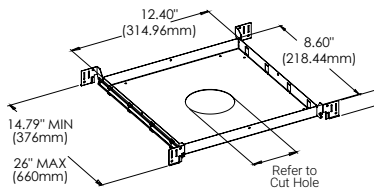

CUT HOLE:
Trim & Trimless: Ø4"

BAFFLE FINISHES

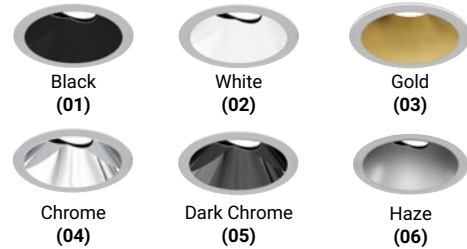

ADD-ONS




**SINUSOIDAL EMERGENCY
MICRO INVERTER**

- Remote Mounted
- 150W Max 0-10V
- 25W Max Triac/elv.
- Can accommodate multiple fixtures
- Recommended to load to 80%
- 90 Min Service
- See Spc Sheet for more details




**TRIM
AT/IC Box: 46748-010**


CUT HOLE:
Trim & Trimless: Ø4"

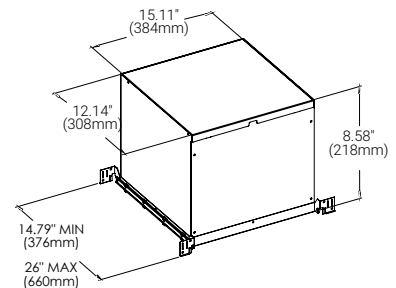


DRIVERS

- Compatible with TRIAC (forward-phase or leading-edge) ELV (reverse-phase or trailing edge) and 0-10V dimmers.
- ESSxxxW models: TRIAC and ELV dimming only at 120 Vac
- ESSxxxW models: ELV dimming only at 230 Vac
- 90° C maximum case hot spot temperature
- Class 2 power supply
- Lifetime: 50,000 hours at 70° case hot spot temperature (some models have a higher lifetime)
- IP64-rated (IP66 for ESST) case with silicone-based potting
- Protections: Output open load, over-current and short-circuit (hiccup), and over-temperature with auto recovery.
- Conducted and radiated EMI: Compliant with FCC CFR Title 47 Part 15 Class B (120 Vac) and Class A (277 Vac), and EN55015 (CISPR 15) at 220, 230, and 240 Vac.
- Complies with ENERGY STAR®, DLC (DesignLight Consortium®) and CA Title 24 technical requirements
- Worldwide safety approvals

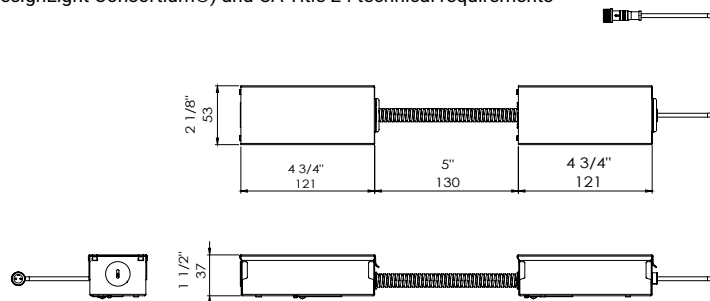


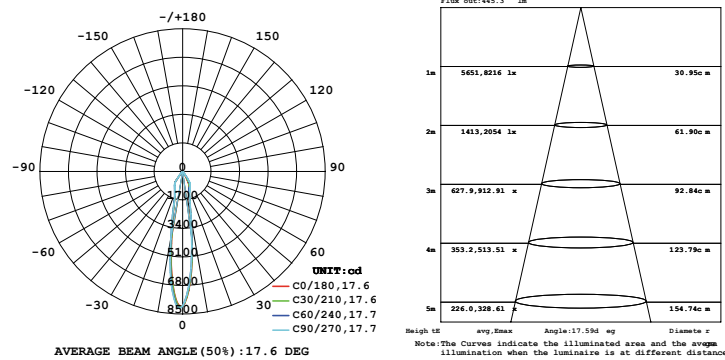



26W 1-LIGHT Round GIMBAL NARROW CLEAR

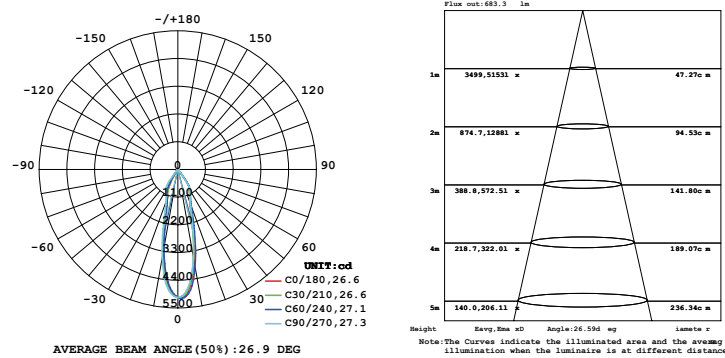



26W 1-LIGHT Round GIMBAL MEDIUM CLEAR

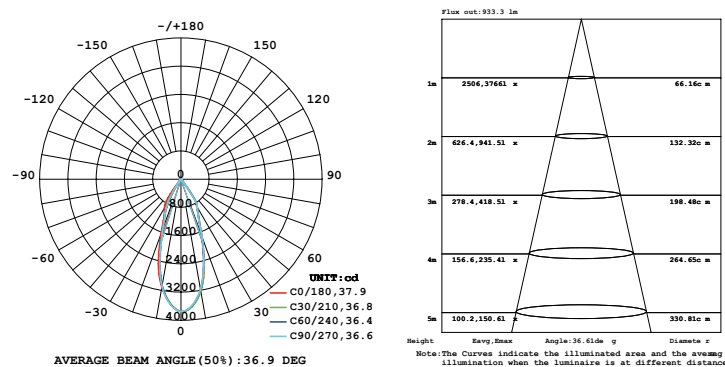



26W 1-LIGHT Round GIMBAL WIDE CLEAR

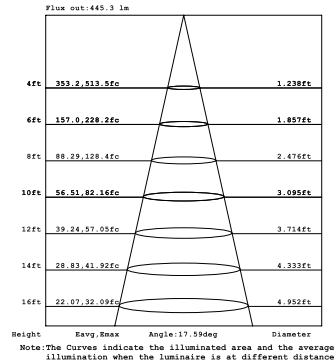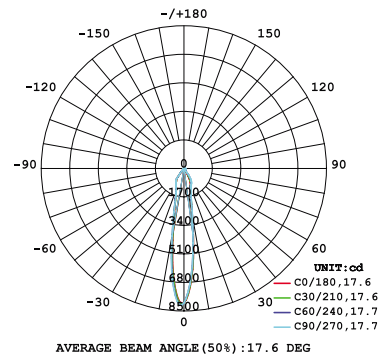

26W 1-LIGHT Round GIMBAL NARROW CLEAR

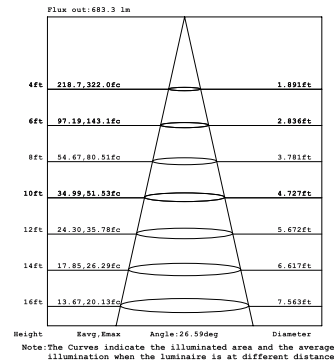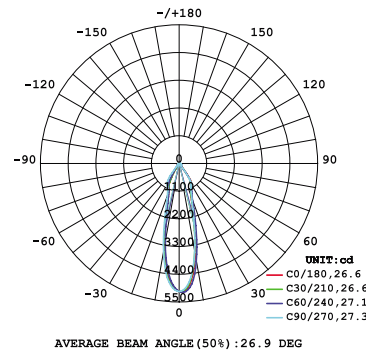

26W 1-LIGHT Round GIMBAL MEDIUM CLEAR

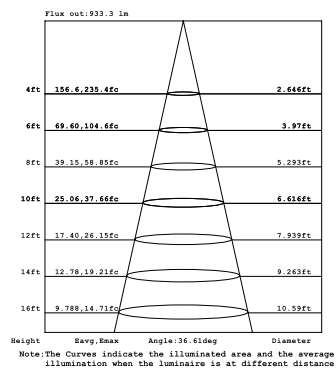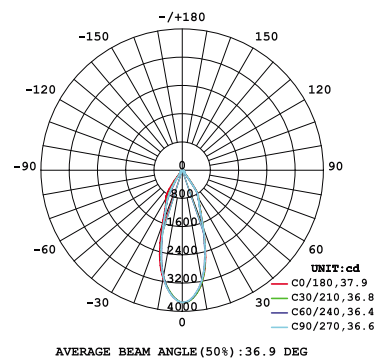

26W 1-LIGHT Round GIMBAL WIDE CLEAR