


FEATURES:

1. Material: Tin Plated Aluminum
2. UL listed for U.S. & Canada.
3. Wire connector rated for 35Kv max.
4. Class B/C compressed, concentric, and compact conductor.
5. Dual rated AL9CU.


AL-N-NT Series



PROGRAM:	SOLIDWORKS
UPDATED:	2/24/2026
SALES REV:	B
SIZE:	B (11x17)

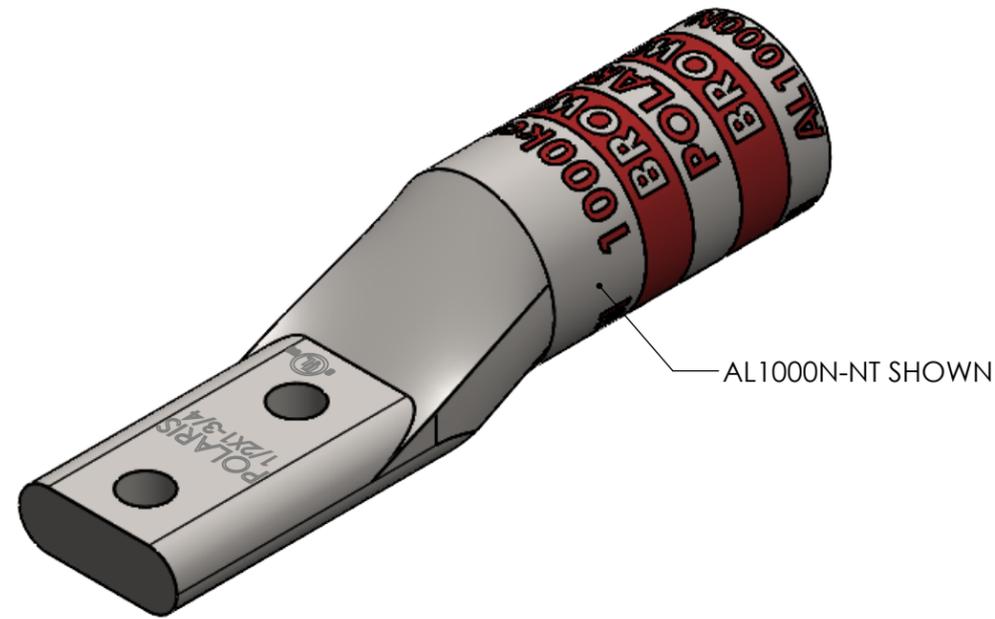

AL1000N-NT SHOWN

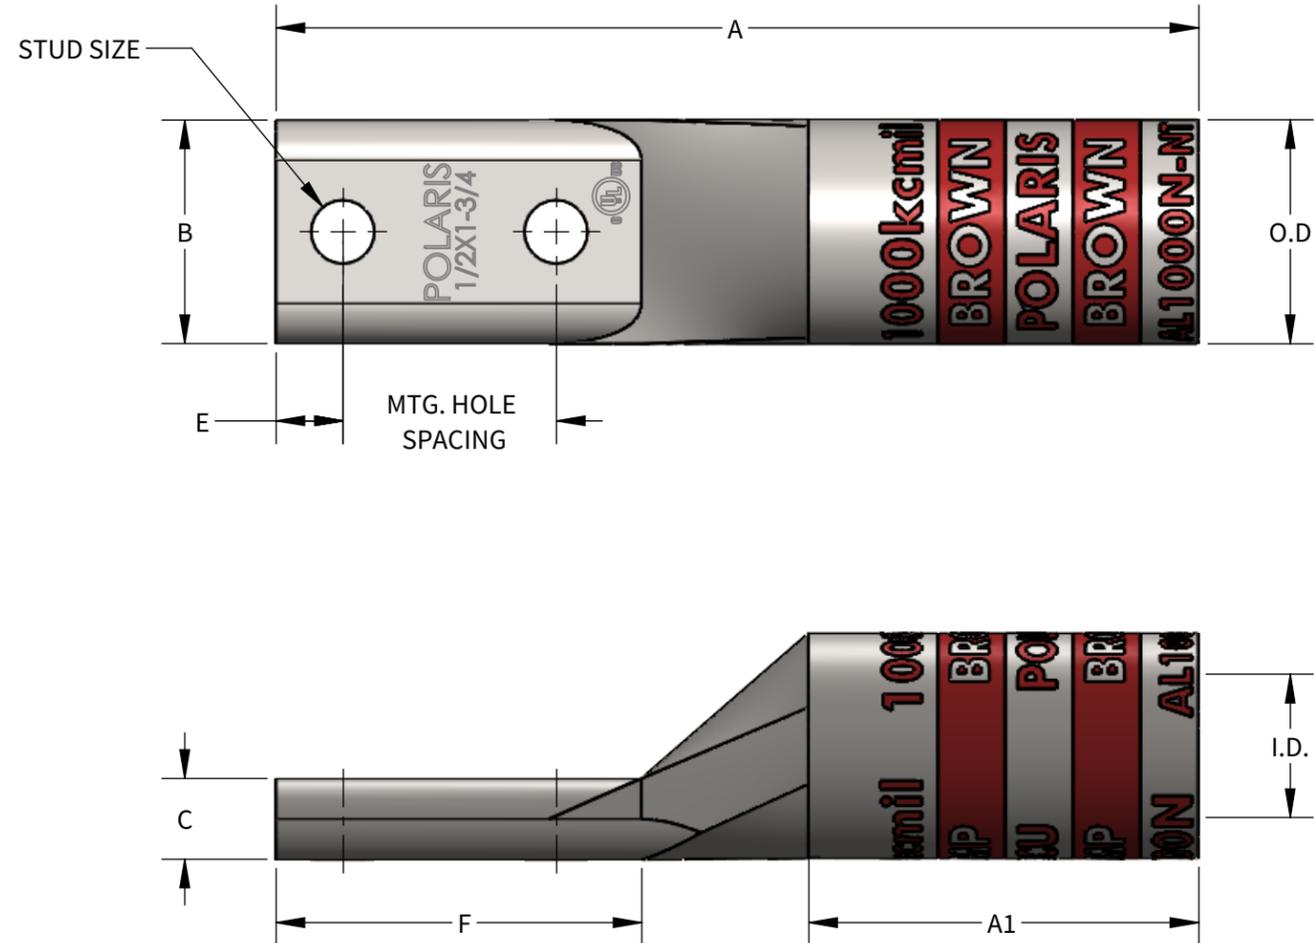

Part Number	Building Code Wire Size	Expanded Wire Range*	Stud Size	Mtg. Hole Spacing (in.)	Die Color	I.D.	O.D.	A	A1	B	C	E	F
AL250N-NT	250kcmil	250 -1/0	1/2	1 3/4	RED	0.59	0.92	5.19	1.50	0.85	0.32	0.55	3.00
AL350N-NT	350kcmil	350 -3/0	1/2	1 3/4	BROWN	0.72	1.12	5.74	1.90	1.12	0.39	0.55	3.00
AL400N-NT	400kcmil	400 -4/0	1/2	1 3/4	GREEN	0.76	1.19	6.19	2.30	1.19	0.42	0.55	3.00
AL500N-NT	500kcmil	500 -250	1/2	1 3/4	PINK	0.84	1.32	6.49	2.50	1.32	0.47	0.55	3.00
AL600N-NT	600kcmil	600 -250	1/2	1 3/4	BLACK	0.92	1.44	6.68	2.60	1.44	0.51	0.55	3.00
AL750N-NT	750kcmil	750 -500	1/2	1 3/4	YELLOW	1.03	1.46	7.30	3.20	1.46	0.43	0.55	3.00
AL1000N-NT	1000kcmil	1000 -750	1/2	1 3/4	BROWN	1.17	1.83	7.57	3.20	1.83	0.66	0.55	3.00

* SEE INSTALLATION INSTRUCTIONS FOR TOOL AND DIE COMPATIBILITY

