

3.5" 45370 SQUARE REGRESSED GIMBAL



2700K . 3000K . 3500K . 4000K . 5000K

The Midway collection is a family of integrated led recessed lights available in sizes ranging from 2"-6". With their durable die cast aluminum bodies and built on CCT color selecting switch Midway family fixtures are aesthetically appealing, functional and extremely versatile. Their IC rated shallow bodies allow them to be used in most residential and commercial installations with or without insulation in the ceiling. Midway fixtures are available in white or black finish and come standard with a reliable phase dimming power supply.

SPECIFICATIONS

LIGHT HOUSING

- IC Airtight Cast aluminum body.
- Remodel application. C/W spring loaded clips.
- Mates to driver box with quick connector.
- Max Ceiling thickness 5/8".
- Approved for damp location.

DIMENSIONS

- Cut hole: $\varnothing 3 \frac{3}{4}$ ".
- Fixture: $\varnothing 4 \frac{3}{8}$ " x $3 \frac{1}{4}$ "H.

ELECTRICAL

- 120 V Input class 2 constant current dimmable driver enclosed in junction box.
- TRIAC and ELV dimming.
- Min operating temperature (-4°F~104°F) (-20°C~40°C).

LIGHT MODULE

- 1 x 12W Integrated LED COB.
- Lumen maintenance 70% 50,000 hrs.
- CRI: 90+
- Beam angle: 38 degree.
- Kelvin (CCT): 27K | 30K | 35K | 40K | 50K
- Delivered Lumen: 705 lm | 747 lm | 812 lm | 848 lm | 847 lm

CERTIFICATIONS





ORDERING GUIDE

MODEL	FINISH
45370-021	Black
45370-014	White

Ø3 3/4"	WATTS	LUMENS	KELVIN	DIMMABLE	CRI	BEAM ANGLE	ADJUSTABLE
Ø3 3/4"	12W	Up to 848	CCT Selectable	TRIAC/ELV	90+	38°	15°



PRODUCT DIMENSIONS

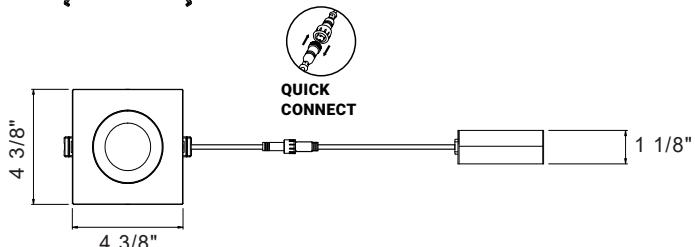
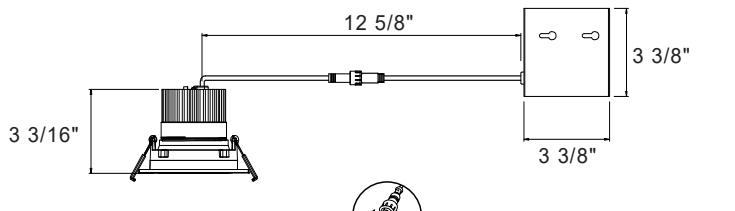


ACCESSORIES

45611-018 60" 2 pin Connector	45372-018 NEW CONSTRUCTION PLATE Mounting kit includes bars 14" x 7 3/4" Ø3 3/4"	45517-013 NEW CONSTRUCTION SMASH PLATE 13 1/4" x 6 1/2" Ø3 3/4"	47205-017 15W REMOTE EMERGENCY BACKUP BATTERY	NO IC BOX REQUIRED
-------------------------------------	--	--	--	--------------------

PHOTOMETRICS

Imperial

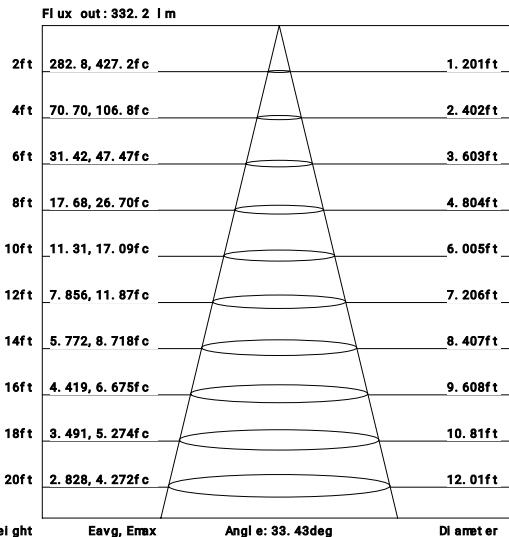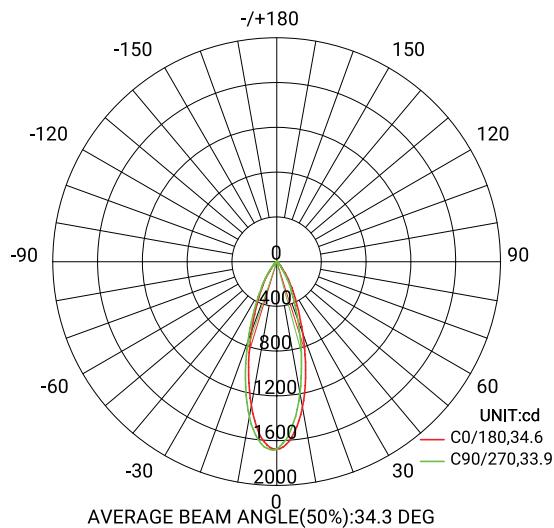

Metrics

