
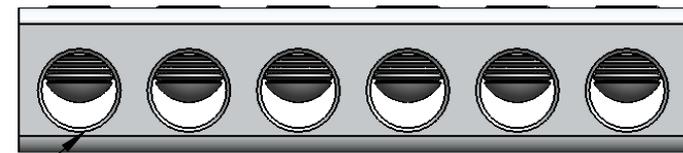


PL250-6 SHOWN

PART NUMBER	NO. OF PORTS	LENGTH
PL250-2	2	1.82
PL250-3	3	2.68
PL250-4	4	3.55
PL250-5	5	4.41
PL250-6	6	5.27
PL250-8	8	6.99
PL250-10	10	8.72
PL250-12	12	10.45
PL250-14	14	12.18



WIRE ENTRY PORT
WIRE RANGE: 250KCMIL - #6 AWG
PRE-FILLED W/ OXIDE INHIBITOR

NOTES:

- CONNECTOR MANUFACTURED FROM 6061-T6 ALUMINUM ALLOY.
- CONNECTOR CHROMATED FOR INCREASED CORROSION RESISTANCE.
- UL LISTED PER UL486A/B SPECIFICATIONS FOR 600V.
- DUAL RATED FOR 90°C COPPER AND/OR ALUMINUM CONDUCTOR.

		POLARIS SALES CO. INC	
<small>PROPRIETARY AND CONFIDENTIAL</small>		<small>11625 PROSPEROUS DRIVE ODESSA, FL 33556</small>	
<small>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLARIS SALES CO. INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF POLARIS SALES CO. INC. IS PROHIBITED.</small>		TITLE: UNINSULATED 250 CONNECTOR	
<small>NAME</small>		<small>DATE</small>	
<small>DRAWN BY</small> S.PARRY		<small>DATE</small> 07/2012	
<small>MATERIAL:</small> N/A		<small>DWG. NO.</small> PL250-	
<small>SCALE:</small> N/A		<small>SHEET:</small> 1 OF 1	