


**FEATURES:**

1. Material: TiN Plated CU
2. UL listed for U.S. & Canada.
3. Wire connector rated for 35Kv max.
4. Class B/C compressed, concentric, and compact copper conductor.
5. Expanded wire range when installed with dieless NSi compression tool (N12ID).
6. Dimensions are for reference only.



# SC Series: SC-750



<b>PROGRAM:</b>	SOLIDWORKS
<b>UPDATED:</b>	9/2022
<b>SALES REV:</b>	A
<b>SIZE:</b>	B (11x17)

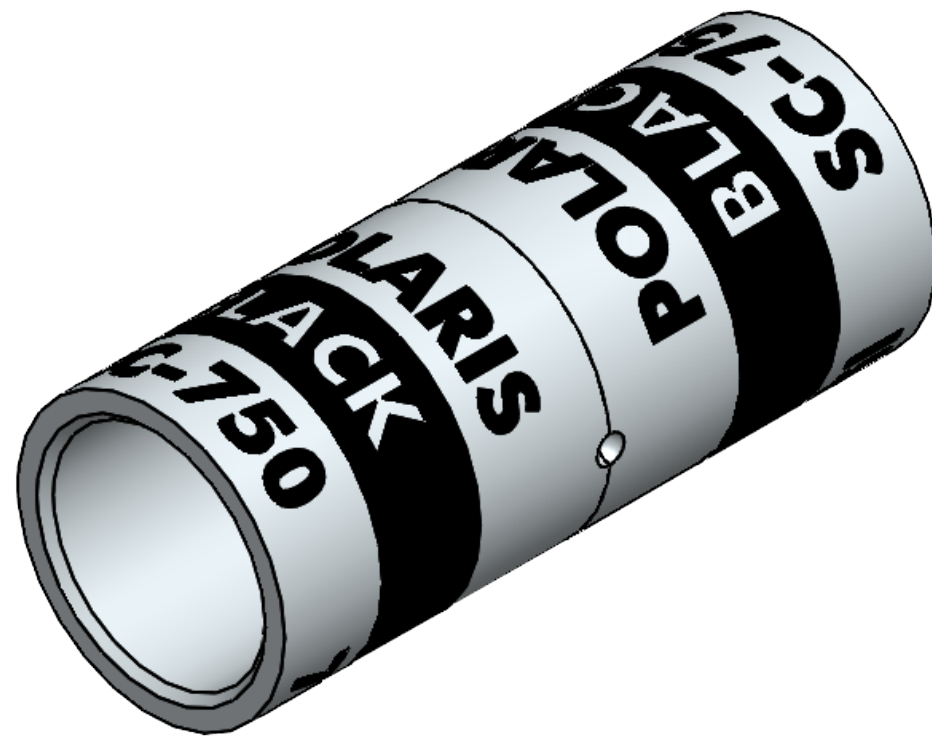

SCALE 3:2

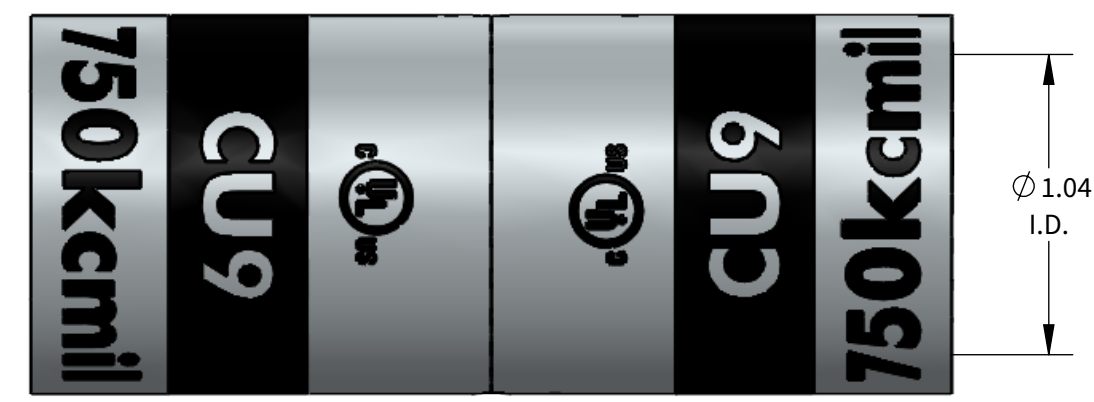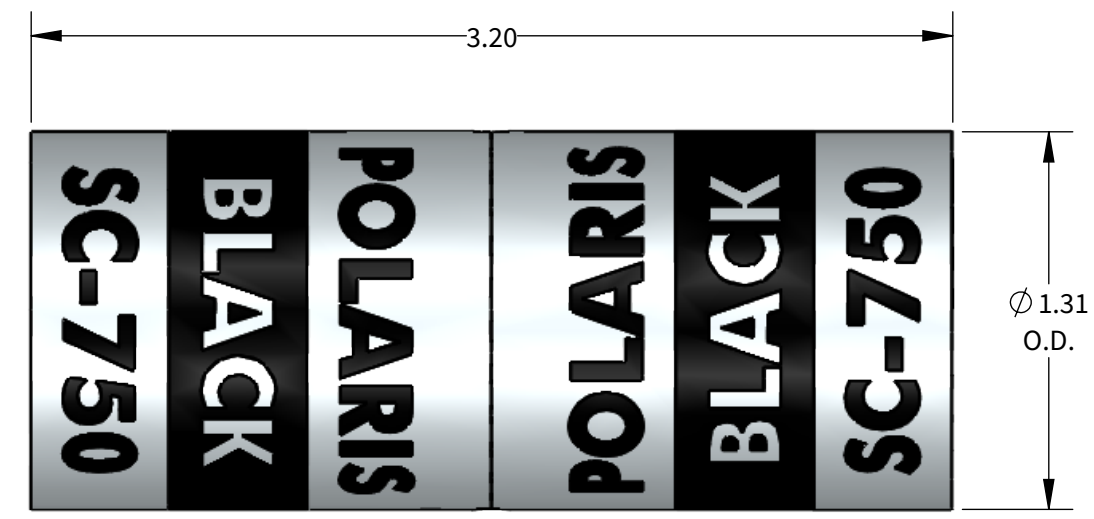

COPPER COMPRESSION CONNECTOR TOOL AND DIE CHART (# OF CRIMPS PER SIDE)

WIRE SIZE	STRIP LENGTH	DIE COLOR	EXPANDED WIRE RANGE W/N12ID	NSI		GREENLEE & ILSCO		BURNDY	T&B	HUSKIE	
				N1240 SERIES	NSI-12	NSI-12	GREENLEE 1240 SERIES ILSCO ILC-12, ILC-15	Y-35, Y750, PAT 750	TBM-15, TBM-14M	EP510C	
750kcmil	1-3/4"	BLACK	750kcmil-500kcmil	KC12-750 (1)	CD21 (2)	HT41BP (2)	KC12-750 (1) ILD-17 (2)	U39RT (2)	15515-CK (2)	HT41BP (2)	CD21 (2)