


Specifications :

- Material :
1. Panel : SPCC, 1.5 mm thickness with Black(RAL 9005) color painted.
 2. RJ45 Jack :
 - 2-1. Housing : ABS, UL 94V-0.
 - 2-2. Contact Bracket : PC, UL 94V-2, Transparent color.
 3. RJ45 Jack Contact :
 - 3-1. Material : Phosphor Bronze with Nickel plated.
 - 3-2. Contact area : 50 micro-inch Gold plated Plug contact area.
 4. IDC :
 - 4-1. Housing : PC+Glass Fiber, UL 94V-2.
 - 4-2. Terminal : Phosphor Bronze with Tin plated.
 5. Jack Bracket Set : ABS, UL 94V-0.
 6. Cable Holder : SPCC, 1.5 mm thickness with Black(RAL 9005) color painted.
 7. PCB : FR4, UL 94V-0.

- Performance :
- a. T568A & T568B wiring.
 - b. Insertion force : 20N max. (IEC 60603-7-4)
 - c. Retention strength : 7.7 kg between Jack and Plug.
 - d. Operating temperature : -10°C to 60°C. (ISO/IEC 11801, ANSI/TIA/EIA 568 B.2)
 - e. Life(mating cycles) :
 - *Jack : 750 cycles min. (ISO/IEC 11801, IEC 60603-7-4)
 - *IDC : Suitable for 22-26 AWG stranded and solid wire, compatible with both 110 & Krone punch down tools.
 - f. The Cat.6 transmission performance is in compliance with the ANSI/TIA/EIA 568 B.2-1 standard.

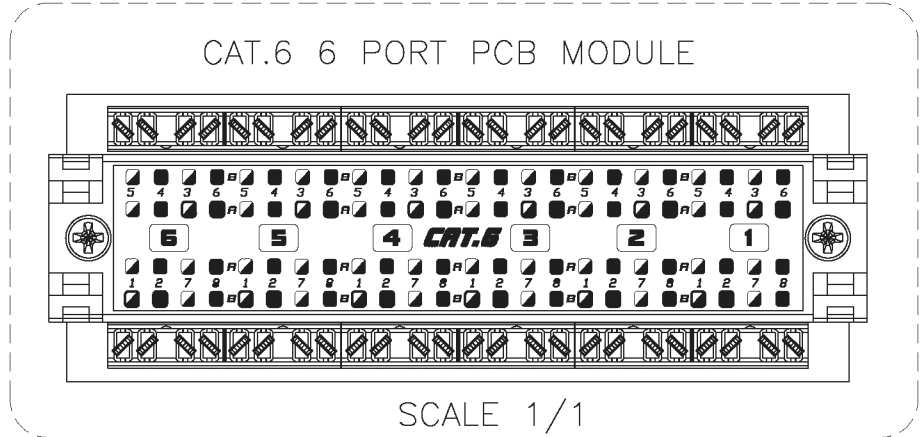

GENERAL TOLERANCE OF DIMENSIONS X.xxx ±0.005 X.xx ±0.05 X.x ±0.1	DRAWING			
	CHECK			
	APPROVAL			
		DATE	NAME	ITEM NO.: PRO-CPP-24-CAT6-19
	SCALE 1/4 (A4)	UNIT mm	DES.: CAT.6 UNSHIELDED PATCH PANEL	
	DRAWING NO.			
	DRAWING CLASSIFICATION		S SHEET 1 OF 1	