



REMOVABLE CAP
FOR DUAL ENTRY
(INSERT IN OTHER SIDE)

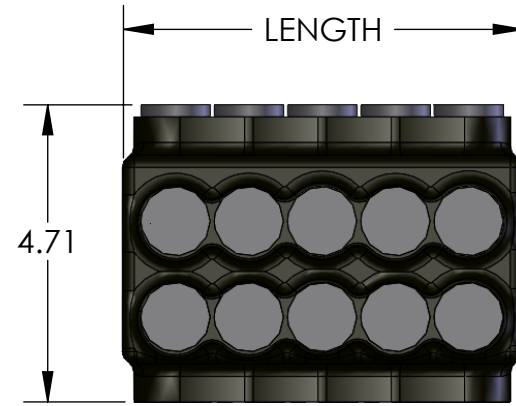

REMOVABLE CAP
TO TIGHTEN SCREW
(REPLACE WHEN COMPLETE)

5/16 INTERNAL
HEX PRESSURE SCREW



WIRE ENTRY PORT
WIRE RANGE: 600MCM - #6 AWG
PRE-FILLED W/ OXIDE INHIBITOR




IPLDS600-10 SHOWN

NSI PART NUMBER	UL PART NUMBER	NO. OF PORTS	LENGTH
IPLDS600-4	IS4J	4	3.37
IPLDS600-6	IS6J	6	4.47
IPLDS600-8	IS8J	8	5.77
IPLDS600-10	IS10J	10	7.07
IPLDS600-12	IS12J	12	8.37
IPLDS600-14	IS14J	14	9.67
IPLDS600-16	IS16J	16	10.97
IPLDS600-20	IS20J	20	13.57

NOTES:

- CONNECTOR MANUFACTURED FROM 6061-T6 ALUMINUM ALLOY.
- UL LISTED PER UL486A/B SPECIFICATIONS FOR 600V.
- DUAL RATED FOR 90°C COPPER AND/OR ALUMINUM CONDUCTOR.
- COLD TEMPERATURE RATED TO -45°C.
- HIGH DIELECTRIC STRENGTH INSULATION IS ABRASION AND CHEMICAL RESISTANT
- UV RATED

		POLARIS SALES . CO . INC	
<small>PROPRIETARY AND CONFIDENTIAL</small>		<small>11625 PROSPEROUS DRIVE ODESSA, FL 33556</small>	
<small>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLARIS SALES CO. INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF POLARIS SALES CO. INC. IS PROHIBITED.</small>		TITLE: INSULATED STACKED DUAL ENTRY (BOTTOM ROW) 600 CONNECTOR	
<small>NAME</small>		<small>REVISED</small>	
<small>DRAWN BY</small> L. HILL		<small>4/30/2024</small>	
MATERIAL: N/A		SCALE: N/A	
DWG. NO. IPLDS600-		SHEET: 1 OF 1	