





**NOTES:**

1. CONNECTORS ARE MANUFACTURED FROM 6061-T6511 ALUMINUM ALLOY.
2. CONNECTOR BODY, ROCKET AND SCREW CAP ARE MANUFACTURED FROM UV RATED SANTOPRENE RUBBER.
3. CONNECTOR MEETS OR EXCEEDS ANSI C119.1 SPECIFICATIONS


REMOVAL BE CAPS FOR ACCESS TO 5/16 INTERNAL HEX PRESSURE SCREWS



CUT CAP FOR APPROPRIATE WIRE SIZE AS INDICATED ON CAP

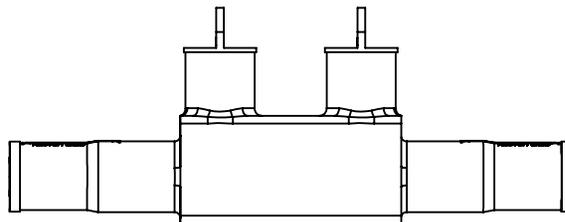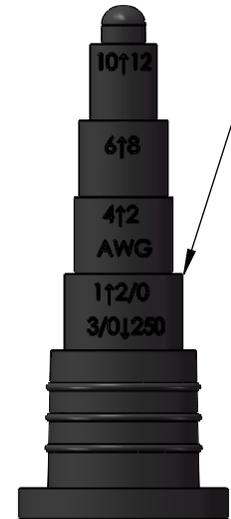

350 - #10 AWG CONDUCTOR PORTS  
ROCKET USED FOR 250-#10  
DISCARD ROCKET FOR 350-300

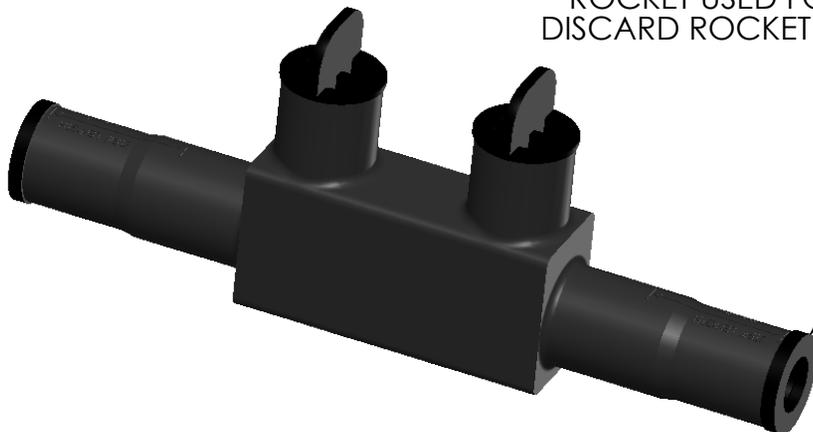

CUT ROCKET



WIRE

**ROCKET DETAIL**

CONTACT NSi FOR SALES @ 800.321.5847

		<b>POLARIS</b> SALES . CO . INC	
PROPRIETARY AND CONFIDENTIAL		11625 PROSPEROUS DRIVE ODESSA, FL 33556	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLARIS SALES CO. INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF POLARIS SALES CO. INC. IS PROHIBITED.		<b>TITLE:</b> SUBMERSIBLE SPLICE CONNECTOR	
NAME	DATE	<b>DWG. NO.</b>	REV
DRAWN BY L. HILL	3/13/2023	ISPBS350	A
<b>MATERIAL:</b> SEE NOTES		<b>SCALE:</b> N/A	<b>SHEET:</b> 1 OF 1