
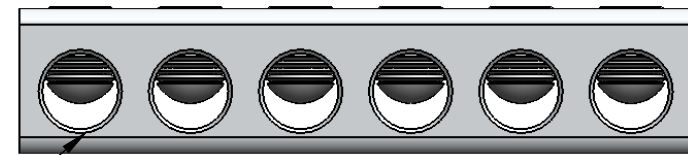


PL500-6 SHOWN

PART NUMBER	NO. OF PORTS	LENGTH
PL500-2	2	2.56
PL500-3	3	3.71
PL500-4	4	4.86
PL500-5	5	6.00
PL500-6	6	7.145
PL500-8	8	9.44
PL500-10	10	11.73
PL500-12	12	14.02
PL500-14	14	16.31



WIRE ENTRY PORT  
WIRE RANGE: 500KCMIL - #4 AWG  
PRE-FILLED W/ OXIDE INHIBITOR

NOTES:

- CONNECTOR MANUFACTURED FROM 6061-T6 ALUMINUM ALLOY.
- CONNECTOR CHROMATED FOR INCREASED CORROSION RESISTANCE.
- UL LISTED PER UL486A/B SPECIFICATIONS FOR 600V.
- DUAL RATED FOR 90°C COPPER AND/OR ALUMINUM CONDUCTOR.

		<b>POLARIS</b> SALES CO. INC	
PROPRIETARY AND CONFIDENTIAL		11625 PROSPEROUS DRIVE ODESSA, FL 33556	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLARIS SALES CO. INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF POLARIS SALES CO. INC. IS PROHIBITED.		<b>TITLE:</b> UNINSULATED 500 CONNECTOR	
NAME DRAWN BY S.PARRY		DATE 07/2012	
MATERIAL: N/A		<b>DWG. NO.</b> PL500-	
SCALE: N/A		SHEET: 1 OF 1	