




K&A Manufacturing
6703 Zinser Street
Schofield, WI 54476
Phone: 800.298.4351
Fax: 866.882.9475
www.raproducts.com
Version Dated: 8/12/15


Hanging Modesty Panel For Flip Table Installation Instructions

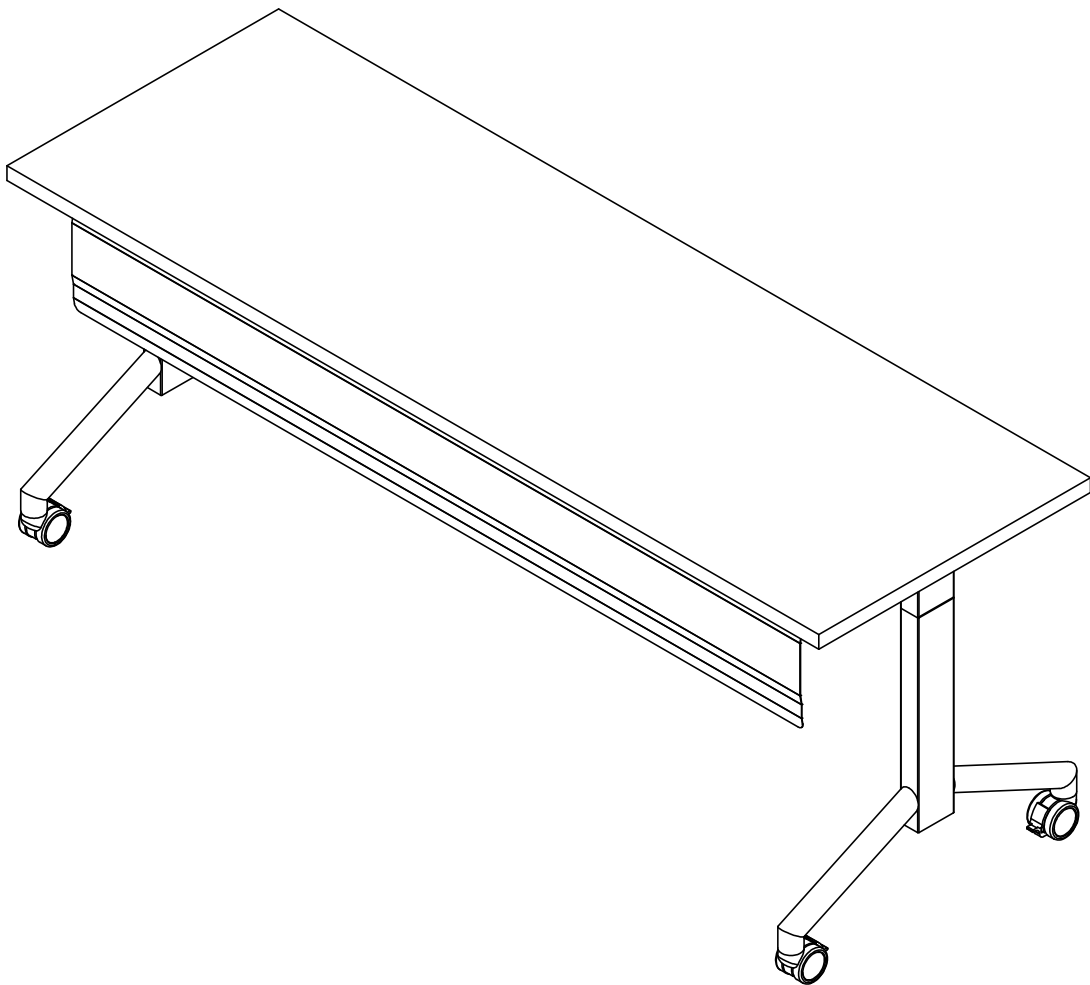

Read all the instructions before beginning.

Tools Required for Assembly:



Power Driver W/Adjustable Torque
#2 Phillips Head Driver Bit
#2 Square Head Driver Bit
Tape Measure
Pencil or Marker

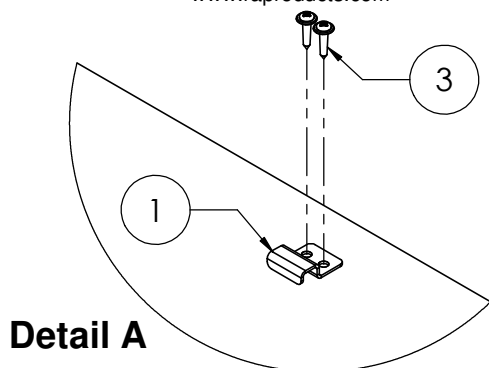

Step 1: With the help of an assistant, lay the table upside down on a protected surface.


Step 2: Center one of the brackets **1** along the back of the worksurface 1-3/16" forward from the back edge. Attach it with (2) wood screws **3**. Do not over-tighten the screws. Use a low torque setting on the power driver.

Step 3: Measure the center to center distance of the slots on the modesty panel **2**. Place the other (2) brackets **1** at that distance and attach them with the remaining (4) wood screws **3**.

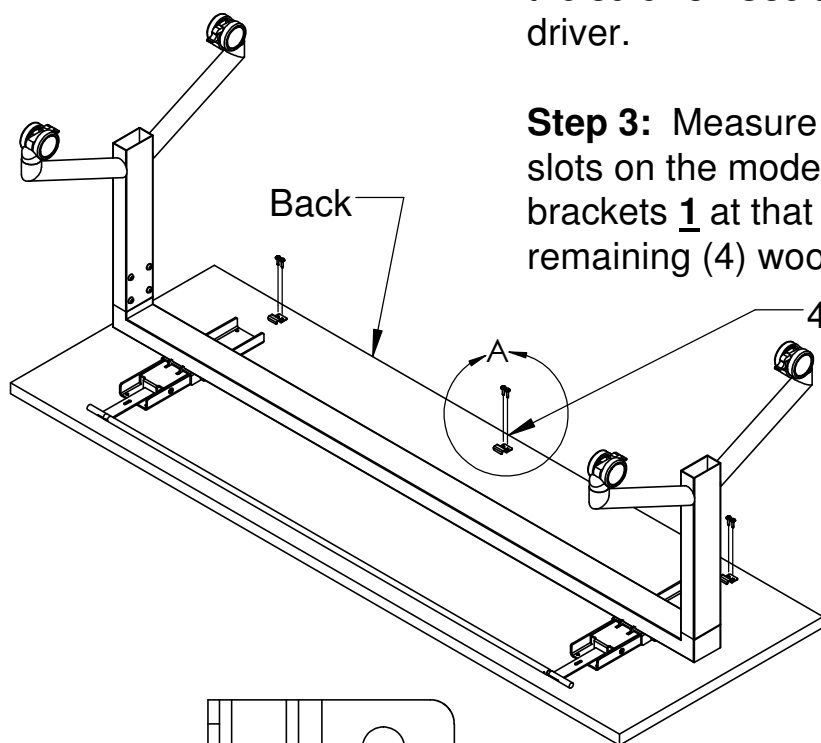

800675

1



51708

3


Hardware Pack # 52828 Drawn Actual Size

ITEM #	PART #	DESCRIPTION	QTY.
1	800675	Hanging Modesty Panel Bracket	3
2	Varies	Flip Table Hanging Modesty Panel	1
3	51708	M5 x 18mm (7/8") Sq/Ph/Wshr Head Wood Screw	6



K&A Manufacturing
6703 Zinser Street Schofield, WI 54476
Phone: 800.298.4351
Fax: 866.882.9475
www.raproducts.com

Step 4: Set the table upright. Pull the latch bar at the front of the table. Flip the worksurface upright. Secure the worksurface in the vertical position by locking the retainers into the slots in the flip mechanisms. Hang the modesty panel **2** on the clips. The table is now ready for use.

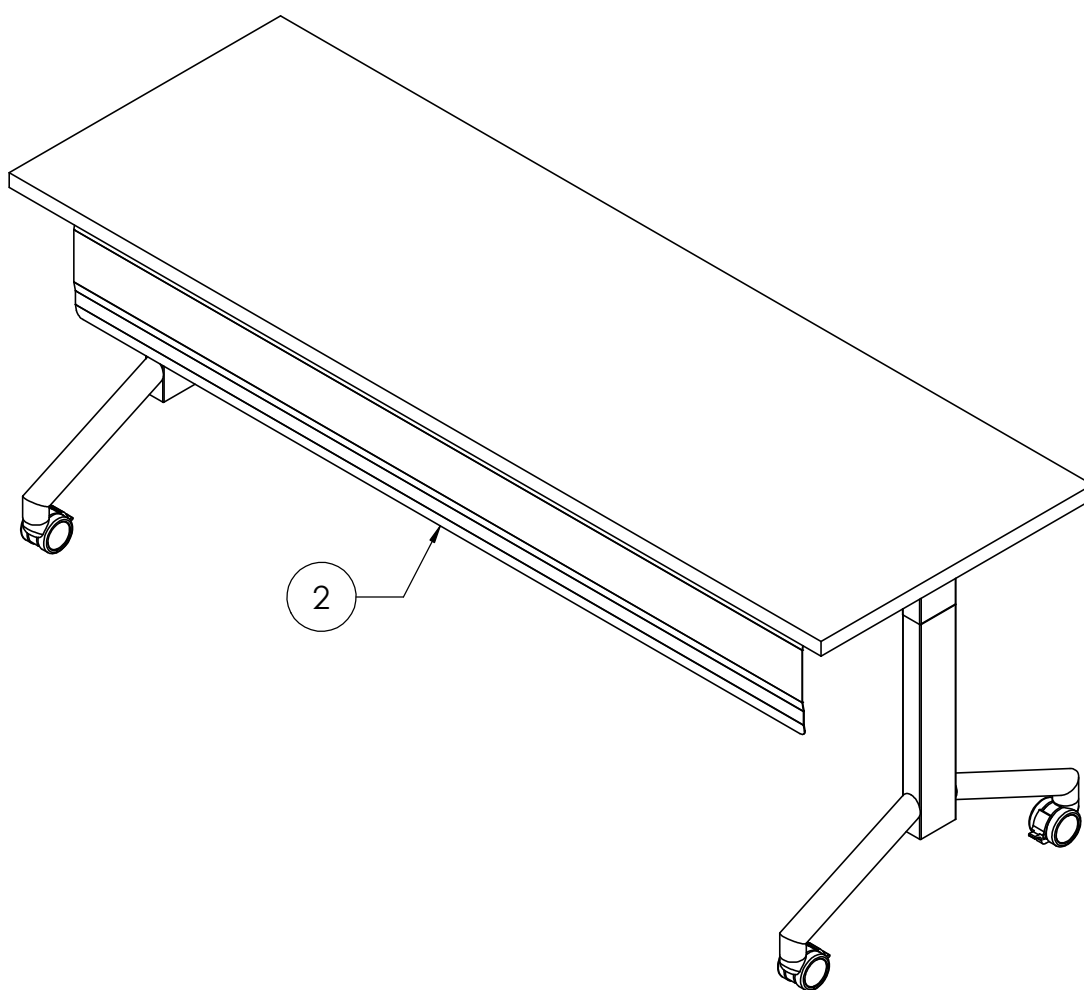

Step 4