

WORK SITE

SKU: 473059 MSRP: \$749.99

FEATURES

- Get reliable cell connectivity for temporary worksites – can be disassembled easily.
- 24-foot telescoping pole for extending antenna over obstructions to pinpoint the nearest cell tower.
- HEX 360 omni-directional antenna with pole mounting bracket.
- Designed for multiple devices and users.
- Works on ALL cellular devices and ALL carriers simultaneously.



KIT INCLUDES



Signal Booster, Bracket & Power Supply



Inside Antenna, Mounting Bracket, 30' Coax Cable & Window Entry Cable



Outside Antenna, 4" Mast, Pole Mounting Bracket, (2) 15' Coax Cables & Cable Adapter



Telescoping Mounting Pole (extends to 24'), Top Stabilizer & Pole Foot

ABOUT

Work Site is a professional-grade kit designed for the most rugged work sites. Whether coordinating with subcontractors, accessing cloud-based blueprints, accessing weather changes, or managing crew schedules from your mobile office, strong cell signal is essential—especially when your workspace moves from site to site. The kit includes the all-weather HEX omni directional antenna with telescoping pole to help keep your cell signal strong.


The Work Site signal booster ensures uninterrupted communication so crews can coordinate, report, and get the job done — without dropped calls or slow data. Works with all cellular devices and all US carriers. All components needed for installation come in one package. Like all weBoost products, Work Site is approved by the FCC and is backed by a 2-year warranty.

SPECIFICATIONS

MODEL NUMBER	460059 ⁺	
FREQUENCIES	Band 12/17	700 MHz
	Band 13	700 MHz
	Band 5	850 MHz
	Band 4	1700/2100 MHz
	Band 25/2	1900 MHz
MAX GAIN	65 dB	
IMPEDANCE	75 Ohm	
POWER	4.2V DC	
CONNECTORS	F Female	
BOOSTER DIMENSIONS	6 x 6 x 1.6 in.	
BOOSTER WEIGHT	1.9 lbs.	

⁺**WARNING:** This product can expose you to chemicals including Nickel, which is known to the State of California to cause cancer, and Bisphenol A, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov


INSTALLATION

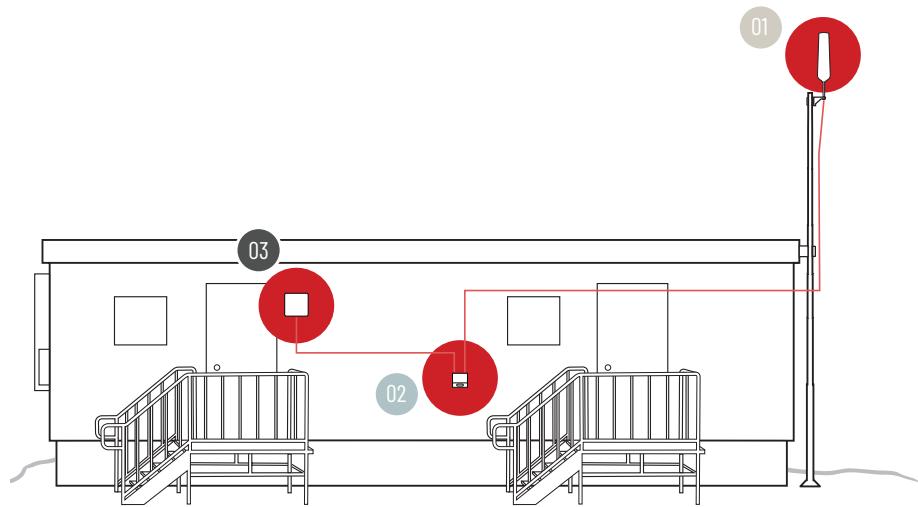

- 01 **Outside antenna:** The outside antenna communicates back and forth with nearby cell towers.
- 02 **Booster:** The booster amplifies any cell signals it receives from the outside antenna.
- 03 **Inside antenna:** The inside antenna broadcasts these signals for use throughout the mobile office.

PACKAGE DIMENSIONS

48 L x 9.25 W x 8.5 H

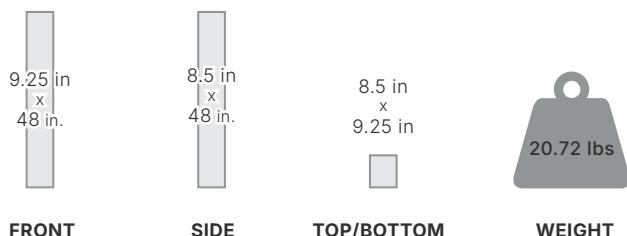

FOR PARTNER'S USE


SUPPORT



2-Year Warranty from Purchase.

Website: <http://support.weboost.com>

Phone: +1 866 294 1660
Monday to Saturday



UPC

473059

