

# TORK<sup>®</sup>

## SPECIFICATION SHEET

### TPX300/TPX300S Low Voltage Pool and Spa Transformer

LOW VOLTAGE TRANSFORMER DESIGNED TO SUPPLY 12VAC, 13VAC, 14VAC TO UNDERWATER POOL AND SPA LIGHTS

#### APPLICATIONS

- Led pool and spa lights
- Submersible fixtures
- Landscape lighting
- Decorative lighting
- Garden Lights

#### FEATURES

- Built-in circuit protection will disconnect power to the transformer in case of defect or overload
- Meets NEC Article 680.23 and any applicable local codes

#### SPECIFICATIONS

- **Voltage:** 120VAC; 60Hz
- **Output:** 12V, 13V, 14V
- **Watts:** 300W
- **Exiting Current:** W/ no load - Max 350mA  
W/full load - Max 3000mA
- **Operating Temperature:** 14°F to 113°F (-10°C to 45°C).
- **Storage Temperature:** -4°F to 140°F (-20°C to 60°C).
- **Temperature Rise:** 80°C w/ max current and voltage and respects to an ambient temp. of 25°C
- **Knockouts:** 1/2" and 3/4"
- **TPX300 Material:** Cold Rolled Steel with Powder Coat Finish
- **TPX300S Material:** Stainless Steel

#### REGULATORY LISTINGS

- cCSAus

#### LIMITED WARRANTY


- 1- year manufacturer's warranty

<b>Project Info:</b>	<b>Type:</b>
<b>Job Ref:</b>	<b>Catalog Number:</b>
<b>Approvals:</b>	<b>Date:</b>
<b>Item Number:</b>	<b>UPC Code:</b>




TPX300 / TPX300S

#### DIMENSIONS

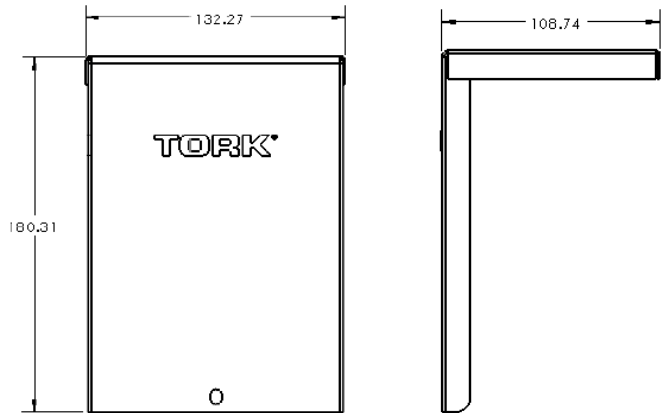

#### WIRING DIAGRAM

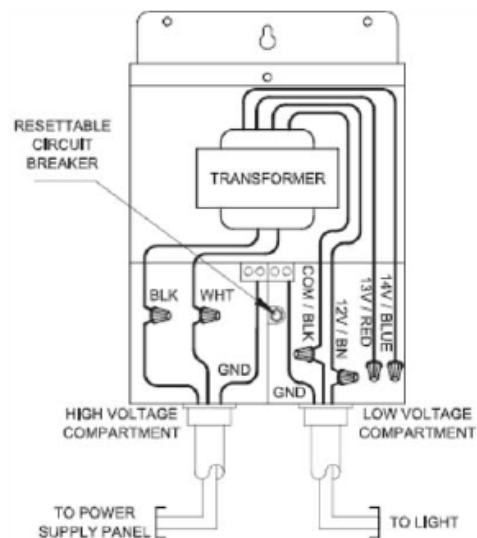

WIRING EXAMPLE

