




E-Z LOCK[®]
CONNECTORS
QUICK INSTALL SOLUTIONS

INNOVATION FROM LINE TO LOAD

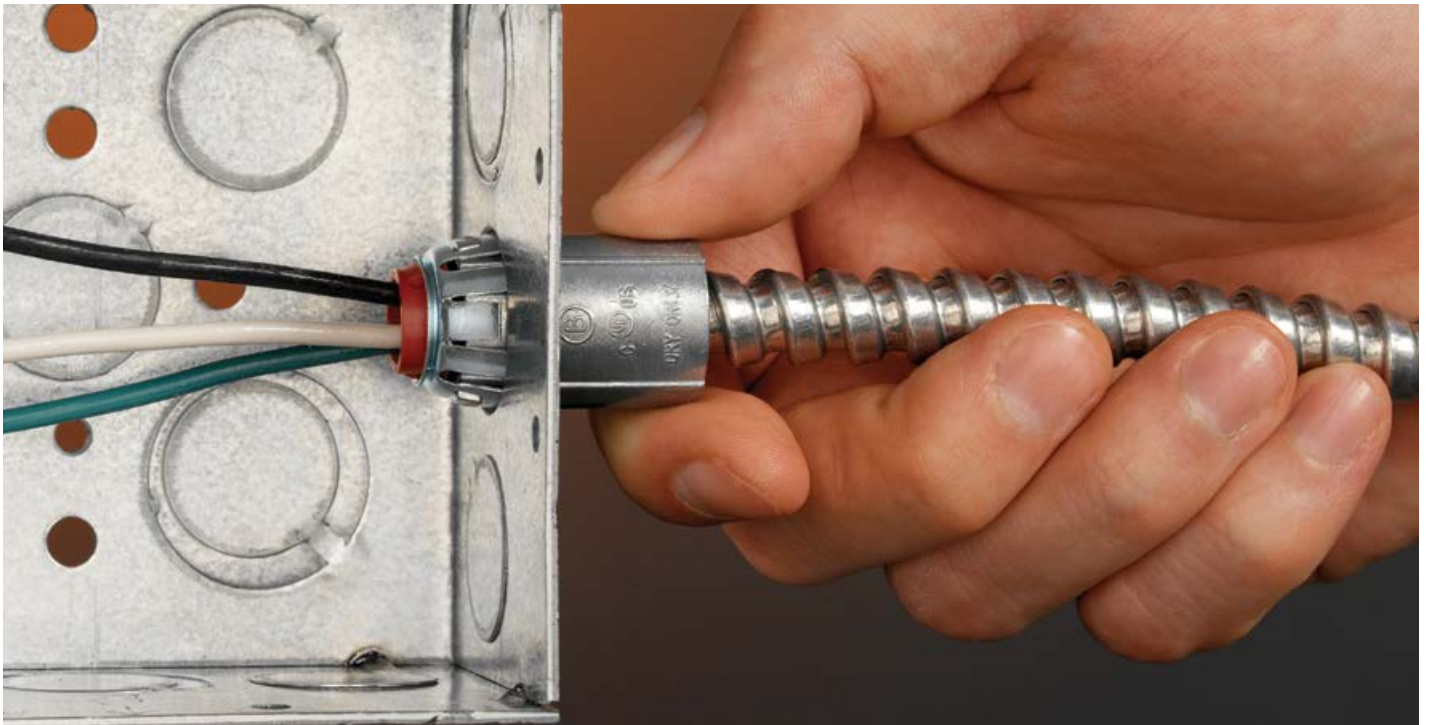

CABLE AND CONDUIT FITTINGS FROM LINE TO LOAD


The trusted name of Bridgeport Fittings carries all the essential fittings professionals need to do their best work. We design every product to guarantee a trouble-free installation that keeps contractors satisfied and coming to your store. Our Made-in-America offering is reliably in stock, and as part of the NSI family of brands, Bridgeport is able to offer industry-leading service, support, ease of business and profitability.



**CONNECT AND SUPPORT
MC-PCS LUMINARY CABLES**

**E-Z LOCK® 590 SERIES MC
CABLE CONNECTORS**


**MIGHTY-HOLD® USD SERIES
DUPLEX UNIVERSAL STRAPS**

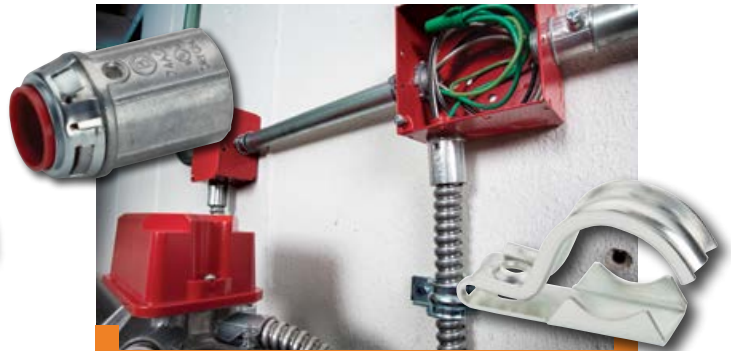

**FIRE SPRINKLER
SYSTEM CONNECTIONS**

**E-Z LOCK® 74ASP SNAP-IN MC
CABLE CONNECTORS**


**MIGHTY-HOLD® UCS SERIES
UNIVERSAL CLAMP STRAPS**

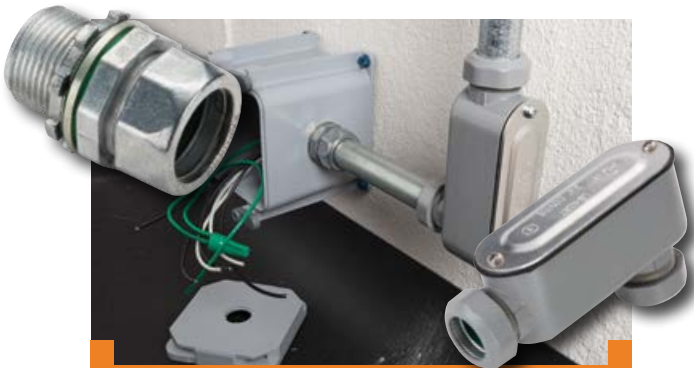

**RAINTIGHT EMT FOR OUTDOOR
LIGHTED PANEL SIGN**

**MIGHTY-SEAL® 251-RT2XL
EXTRA-LONG THREAD EMT
CONNECTORS**

**MIGHTY-SEAL® LB-42RT CONDUIT
BODY WITH INTEGRAL RAIN
TIGHT EMT CONNECTORS**

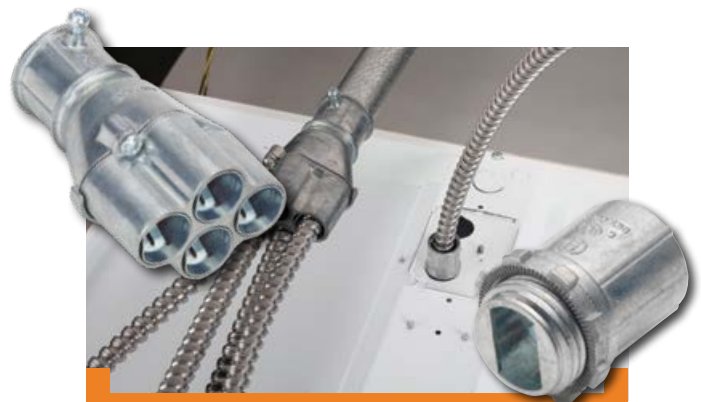

**PREFABRICATED MULTIPLE
LIGHTING CONNECTIONS**

**MIGHTY-MERGE® 4457-DC
MULTI PORT MC CABLE TO
EMT TRANSITION COUPLINGS**

**E-Z LOCK® 590-DC2
MC CABLE CONNECTORS**

4 REASONS CONTRACTORS WANT E-Z LOCK

1
EASY TO SNAP-IN:
Saves time

2
EASY TO REMOVE:
Makes rework a snap

3
STAYS TIGHT IN KNOCKOUT:
Provides great bonding


4
ACCEPTS A LARGE RANGE OF CABLE TYPES AND SIZES:
Means fewer SKUs to stock and transport



**SITE LIGHTING CONNECTIONS WITH DU-
PLEX JACKETED MC/TECK CABLE**

**MIGHTY-SEAL® 695-DC2 DUPLEX
JACKETED MC CABLE CONNECTORS**

**MIGHTY-HOLD® USS-6171
STAINLESS STEEL UNIVERSAL STRAPS**

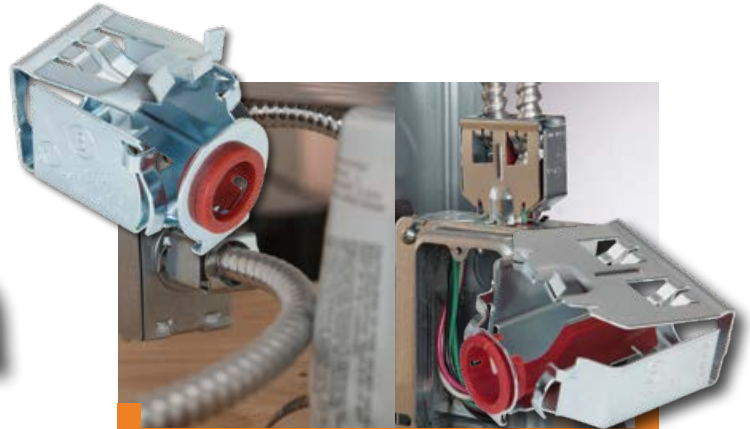

**SINGLE AND DUPLEX STEEL
QUICK INSTALL CONNECTIONS**

**E-Z LOCK® AMC-50QI
MC CABLE CONNECTORS**

**E-Z LOCK® AMC-52QI
DUPLEX MC CABLE CONNECTORS**



**JACKETED MC CABLE
CONNECTION AND SUPPORT**

**MIGHTY-SEAL® 595-DC2C
POLYOLEFIN COATED JACKETED
MC CONNECTORS**

**MIGHTY-HOLD® STAINLESS STEEL
JACKETED MC STRAPS**



**FIRE SPRINKLER
SYSTEM CONNECTIONS**

**MIGHTY-MERGE® 5157-DC
COMPRESSION EMT TO MC
TRANSITION COUPLINGS**

**E-Z LOCK® 39ASP SNAP-IN MC
CABLE CONNECTORS**

38ASP E-Z LOCK® CONNECTORS



**ZINC DIE CAST –
INSULATED THROAT – 105°C**

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
38ASP	1/2"	50	500


39ASP E-Z LOCK® CONNECTORS



**ZINC DIE CAST –
INSULATED THROAT – 105°C**

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
39ASP	1/2"	50	200


74ASP E-Z LOCK® CONNECTORS

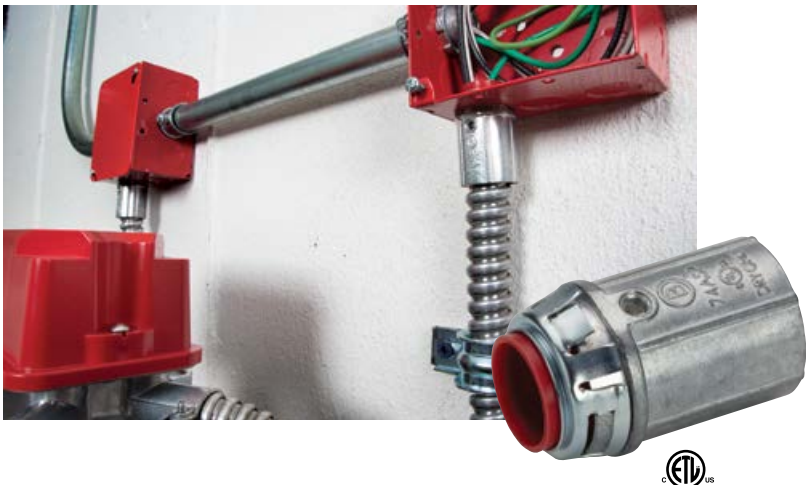

**ZINC DIE CAST –
INSULATED THROAT – 105°C**

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
74ASP	3/4"	25	100


3838ASP E-Z LOCK® CONNECTORS

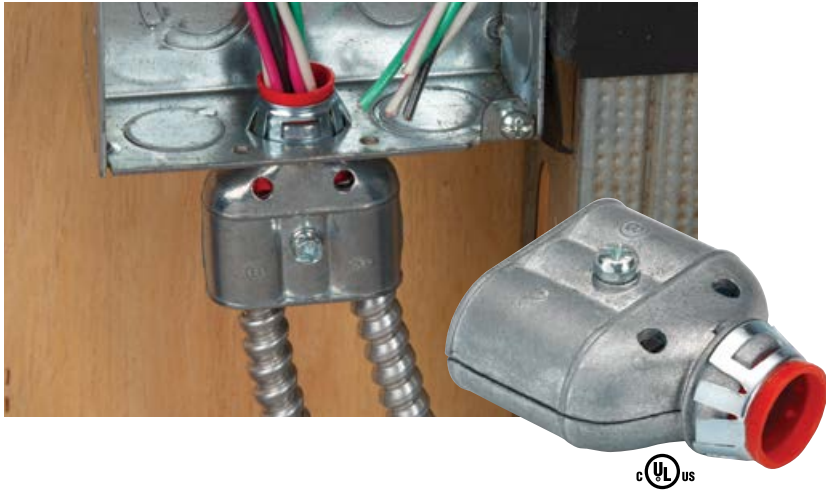

ZINC DIE CAST –
INSULATED THROAT – 105°C

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
3838ASP	1/2"	20	200
3939ASP	1/2"	25	100
7474ASP	3/4"	20	100


38ACDS DOUBLE SNAP OLD WORK CONNECTORS

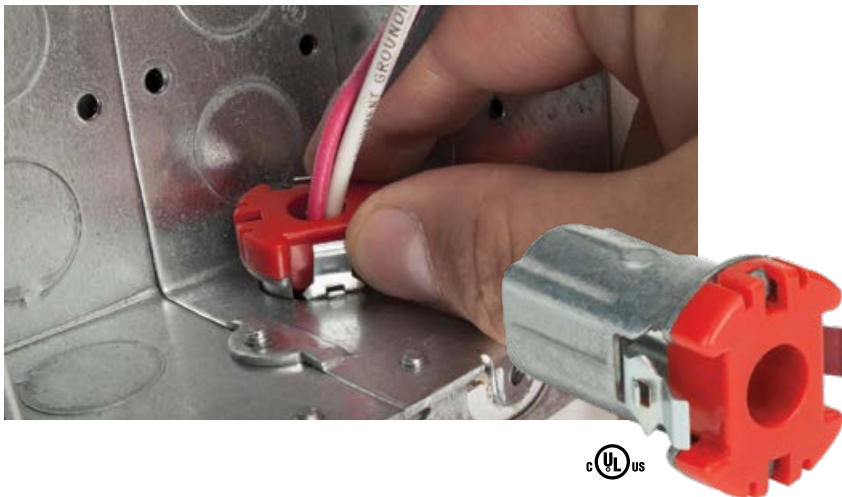

ZINC DIE CAST –
INSULATED THROAT – 105°C

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
38ACDS	1/2"	50	500


SG38ASP E-Z LOCK® CONNECTORS

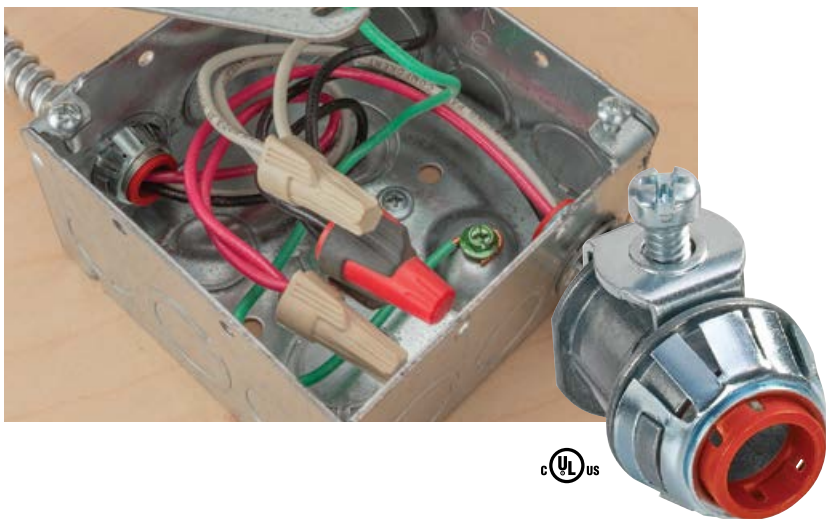

ZINC DIE CAST –
INSULATED THROAT – 105°C

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
SG38ASP	1/2"	50	500

SG3838ASP E-Z LOCK® CONNECTORS

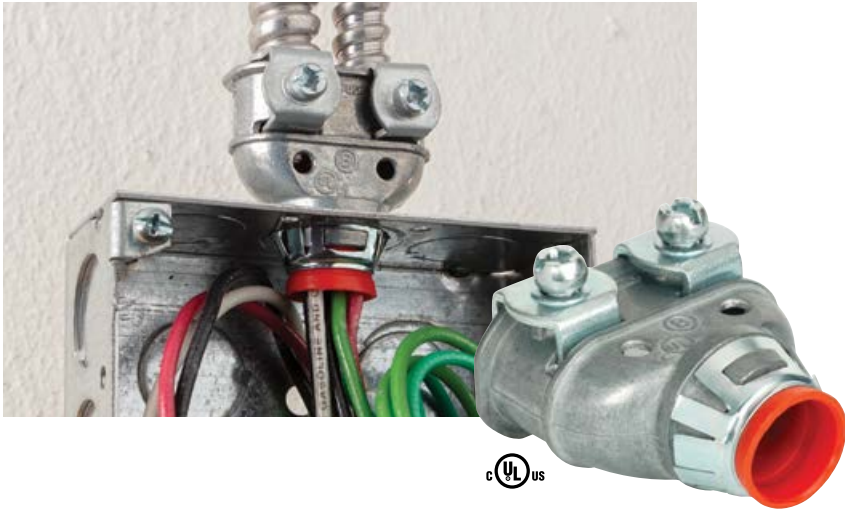

**ZINC DIE CAST –
INSULATED THROAT – 105°C**


CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
SG3838ASP	1/2"	20	200

AMC-50QI E-Z LOCK® CONNECTORS




**ZINC PLATED STEEL –
INSULATED THROAT – 105°C**

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
AMC50QI	1/2"	50	500

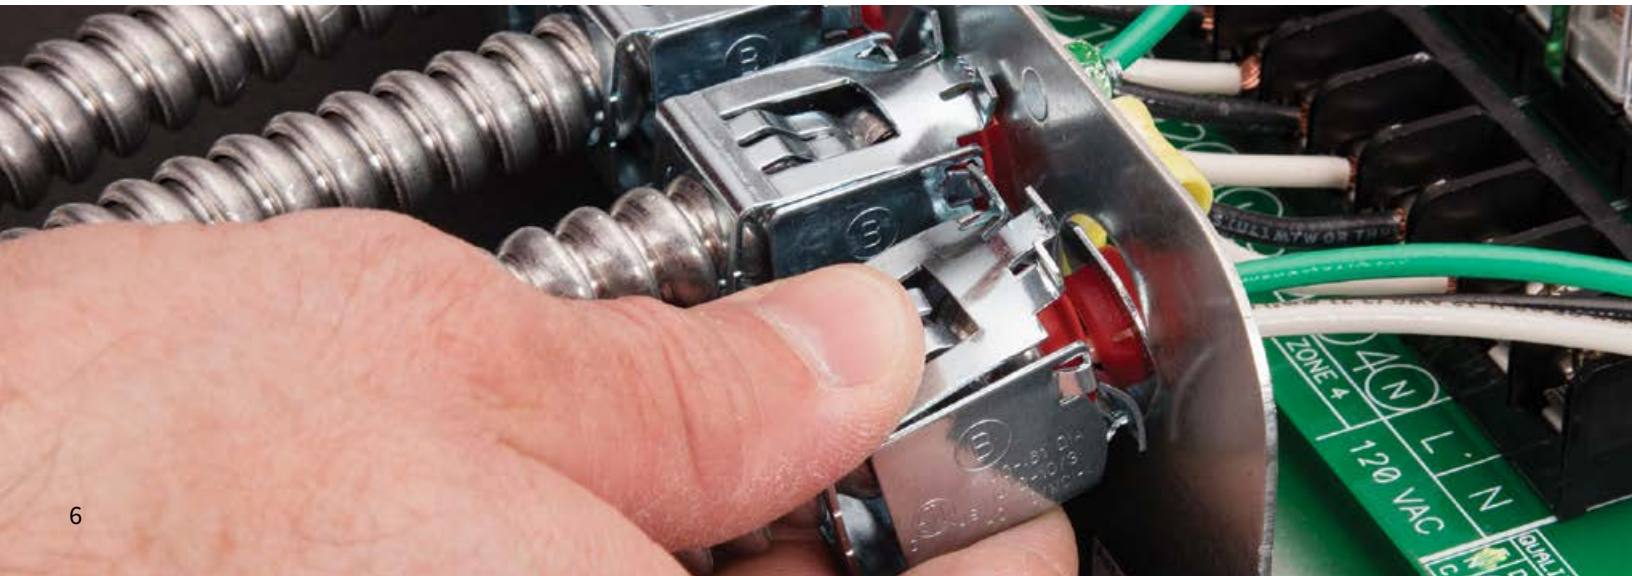

AMC-52QI E-Z LOCK® CONNECTORS

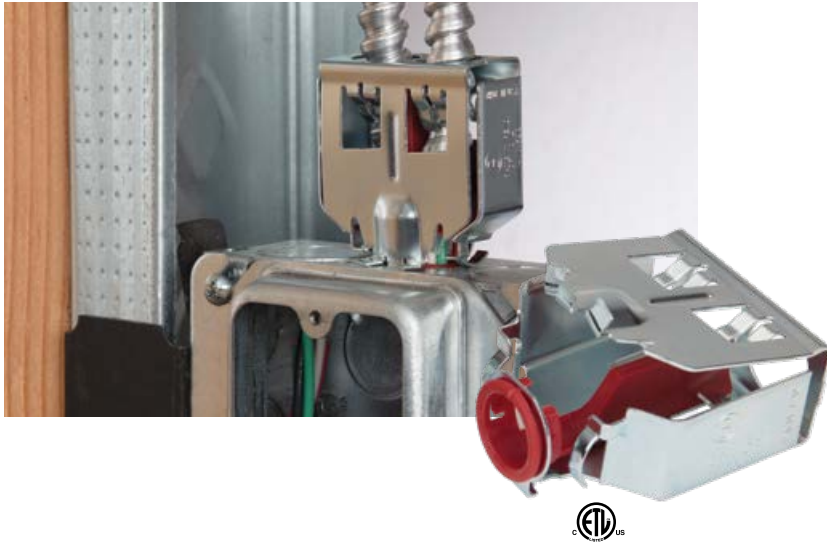

ZINC PLATED STEEL –
INSULATED THROAT – 105°C

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
AMC-52QI	1/2"	25	250

AMC SERIES E-Z LOCK® CONNECTORS



ZINC PLATED STEEL –
INSULATED THROAT – 105°C

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
AMC-50	1/2"	50	500
AMC-5075	1/2"	25	250
AMC-52	1/2"	25	250
AMC-75	3/4"	50	100



4157-DC MIGHTY-MERGE® TRANSITION COUPLINGS



ZINC DIE CAST - SET SCREW EMT STYLE

CATALOG NUMBER	EMT TRADE SIZE	FLEX TRADE SIZE	UNIT QTY	STD PKG QTY
4157-DC	3/4"	3/8"	25	100

5157-DC MIGHTY-MERGE® TRANSITION COUPLINGS



ZINC DIE CAST - COMPRESSION EMT STYLE

CATALOG NUMBER	EMT TRADE SIZE	FLEX TRADE SIZE	UNIT QTY	STD PKG QTY
5157-DC	3/4"	3/8"	25	100

4357-DC MIGHTY-MERGE® TRANSITION COUPLINGS WITH E-Z LOCK TECHNOLOGY



ZINC DIE CAST

CATALOG NUMBER	EMT TRADE SIZE	FLEX TRADE SIZE	UNIT QTY	STD PKG QTY
4357-DC	1"	3/8"	5	20

BRANCH CIRCUIT MULTI-PORT SNAP-IN SOLUTIONS DRY LOCATION

4457-DC MIGHTY-MERGE® TRANSITION COUPLINGS WITH E-Z LOCK TECHNOLOGY



ZINC DIE CAST

CATALOG NUMBER	EMT TRADE SIZE	FLEX TRADE SIZE	UNIT QTY	STD PKG QTY
4457-DC	1"	3/8"	5	20

4156-DC MIGHTY-MERGE® TRANSITION COUPLINGS WITH E-Z LOCK TECHNOLOGY



ZINC DIE CAST

CATALOG NUMBER	EMT TRADE SIZE	FLEX TRADE SIZE	UNIT QTY	STD PKG QTY
4156-DC	1/2"	3/8"	10	40



BRANCH CIRCUIT BACK END SNAP/FRONT END LOCKNUT SOLUTIONS DRY LOCATION

590 SERIES E-Z LOCK® CONNECTORS




ZINC DIE CAST

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
590-DC2	1/2"	50	500
591-DC2	1/2"	50	200
592-DC2	3/4"	25	100

ZINC DIE CAST - INSULATED THROAT - 105°C

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
590-DCI2	1/2"	50	500

3838-DC2 E-Z LOCK® CONNECTORS

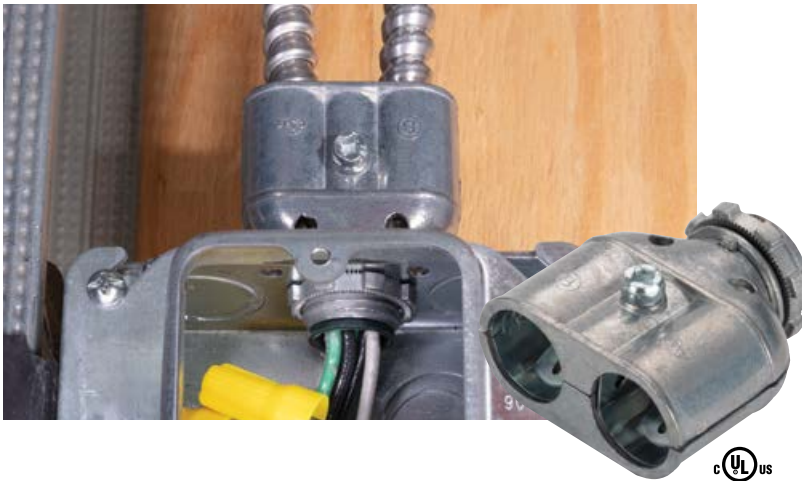

ZINC DIE CAST

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
3838-DC2	1/2"	20	200

ZINC DIE CAST - INSULATED THROAT - 105°C

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
3838-DCI2	1/2"	20	200



US SERIES MIGHTY-HOLD® UNIVERSAL STRAPS



ZINC PLATED STEEL

CATALOG NUMBER	AC/MC CABLE RANGE MIN	AC/MC CABLE RANGE MAX	UNIT QTY	STD PKG QTY
US-4461	14/2 (.425")	10/3 (.61")	100	1000
US-6171	10/4 (.617")	8/3 (.71")	100	1000

USD SERIES MIGHTY-HOLD® UNIVERSAL DUPLEX STRAPS



ZINC PLATED STEEL

CATALOG NUMBER	AC/MC CABLE RANGE MIN	AC/MC CABLE RANGE MAX	UNIT QTY	STD PKG QTY
US-4461	14/2 (.425")	10/3 (.61")	100	1000
US-6171	10/4 (.617")	8/3 (.71")	100	1000



590 SERIES MIGHTY-SEAL® JMC CONNECTORS WITH E-Z LOCK® TECHNOLOGY



ZINC DIE CAST

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
595-DC2	1/2"	15	60
596-DC2	1/2"	15	60
597-DC2	3/4"	5	50

ZINC DIE CAST – INSULATED THROAT – 105°C

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
595-DCI2	1/2"	15	60
596-DCI2	1/2"	15	60

895-DC2 90° MIGHTY-SEAL® JMC CONNECTORS WITH E-Z LOCK® TECHNOLOGY



ZINC DIE CAST

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
895-DC2	1/2"	10	40

ZINC DIE CAST – INSULATED THROAT – 105°C

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
895-DCI2	1/2"	10	40

590 SERIES MIGHTY-SEAL® POLYOLEFIN COATED JMC CONNECTORS WITH E-Z LOCK® TECHNOLOGY



POLYOLEFIN ZINC DIE CAST

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
595-DC2C	1/2"	10	40
596-DC2C	1/2"	15	60

SUITABLE FOR DIRECT BURIAL

**895-DC2C 90° MIGHTY-SEAL® POLYOLEFIN COATED
JMC CONNECTORS WITH E-Z LOCK® TECHNOLOGY**



**ZINC DIE CAST –
INSULATED THROAT – 105°C**

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
895-DC2C	1/2"	10	40

SUITABLE FOR DIRECT BURIAL


695-DC2 MIGHTY-SEAL® JMC CONNECTORS



**ZINC DIE CAST –
INSULATED THROAT – 105°C**

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
695-DC2	3/4"	10	40

**4195-DC MIGHTY-SEAL® RIGID TO DUPLEX
JMC TRANSITION COUPLINGS WITH E-Z LOCK® TECHNOLOGY**

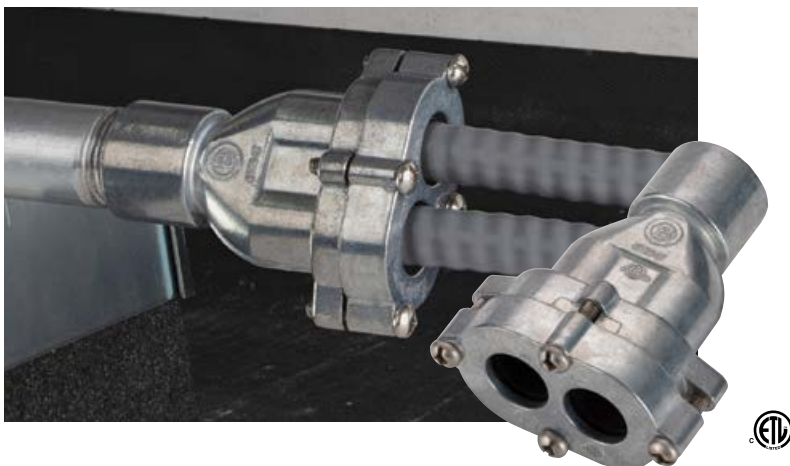

**ZINC DIE CAST –
INSULATED THROAT – 105°C**

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
4195-DC	3/4"	10	40

BRANCH CIRCUIT SOLUTIONS WET LOCATION

5195-DC MIGHTY-SEAL® EMT TO DUPLEX JMC TRANSITION COUPLINGS WITH E-Z LOCK® TECHNOLOGY



ZINC DIE CAST – COMPRESSION EMT STYLE

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
5195-DC	3/4"	10	40

USS-6171 MIGHTY-HOLD® UNIVERSAL STRAPS



STAINLESS STEEL

CATALOG NUMBER	AC/MC CABLE RANGE MIN	AC/MC CABLE RANGE MAX	UNIT QTY	STD PKG QTY
USS-6171	12/2 (.55")	10/3 (.71")	100	1000

For more information visit

NSIINDUSTRIES.COM/ELECTRICAL/BRIDGEPORT



BRIDGEPORT'S COMPLETE LINE OF QUICK INSTALL CABLE SOLUTIONS

CABLE FITTING	ENCLOSURE OPENING K.O. SIZE	CABLE OUTER DIAMETER (O.D.) RANGE	CABLE TYPES LISTED TO NOTE: INCLUDES STEEL AND ALUMINUM	HEALTHCARE FACILITY CABLE	FLEXIBLE METAL CONDUIT NOTE: INCLUDES STEEL AND ALUMINUM (RWFMC)	RECOMMENDED CABLE TYPES NOTE: VERIFY WITH CABLE O.D. INCLUDES STEEL AND ALUMINUM
38ASP ¹	1/2"	.40-.61	AC/MC/MCI-A/MC-PCS	HCF	3/8" FMC/RWFMC	14/2 - 10/3
39ASP ¹	1/2"	.54-.73	AC/AC90/ACG90/MC/MCI-A/MC-PCS	HCF		10/2 - 8/3
38ACDS	1/2"	.40-.63	AC/MC/MCI-A	HCF	3/8" FMC/RWFMC	14/2 - 10/3
3838ASP	1/2"	.38-.59	AC/MC/MCI-A/MC-PCS	HCF/HCFMCI-A	3/8" FMC	14/2 - 10/3
3838SP	1/2"	.38-.59	AC/MC/MCI-A/MC-PCS	HCF/HCFMCI-A	3/8" FMC	14/2 - 10/3
3939ASP	1/2"	.54 - .73	AC/AC90/ACG90/MC/MCI-A/MC-PCS	HCF/HCFMCI-A		10/3-8/3
3939SP	1/2"	.54 - .73	AC/MC/MCI-A/MC-PCS	HCF/HCFMCI-A		10/3-8/3
280SP*	1/2"	.43-.61	AC/MC/MCI-A	HCF/HCFMCI-A	3/8" FMC	14/2 - 10/3
280SPMB*	1/2"	.43-.61	AC/MC/MCI-A	HCF/HCFMCI-A	3/8" FMC	14/2 - 10/3
281SPMB*	3/4"	.61-.69	AC/MC/MCI-A	HCF/HCFMCI-A	3/8" FMC	10/4 - 8/3
3838-DC2	1/2"	.38-.59	AC/MC/MCI-A	HCF/HCFMCI-A	3/8" FMC	14/2 - 10/2
3838-DCI2	1/2"	.38-.59	AC/MC/MCI-A	HCF/HCFMCI-A	3/8" FMC	14/2 - 10/2
560MCI-A	1/2"	.38-.55	MC/MCI-A	HCFMCI-A		14/2 - 10/3
540-SS	1/2"				3/8" FMC	-
590-DC2	1/2"	.43-.61	AC/MC/MCI-A	HCF/HCFMCI-A	3/8" FMC	14/2 - 10/3
591-DC2	1/2"	.60-.73	AC/AC90/ACG90/MC/MCI-A	HCF		10/2 - 8/3
592-DC2	3/4"	.73-.85	AC/AC90/ACG90/MC/MCI-A	HCF	1/2" FMC/RWFMC	8/3 - 6/3
590-DCI2	1/2"	.43-.61	AC/MC/MCI-A	HCF/HCFMCI-A	3/8" FMC	14/2 - 10/3
595-DC2	1/2"	.50-.61	JMC/ TECK90			12/2 - 10/3
595-DC2C	1/2"	.50-.61	JMC/ TECK90			12/2 - 10/3
595-DCI2	1/2"	.50-.61	JMC/ TECK90			12/2 - 10/3
596-DC2	1/2"	.61-.69	JMC/ TECK90			10/4 - 8/3
596-DC2C	1/2"	.61-.69	JMC/ TECK90			10/4 - 8/3
596-DCI2	1/2"	.61-.69	JMC/ TECK90			10/4 - 8/3
597-DC2	3/4"	.83-.84	JMC/ TECK90			8/3 - 6/3
616-NMD	1/2"		NM-B			14/2 - 6/2
617-NMD	3/4"		NM-B			8/2 - 6/3
620-NM	1/2"		NM-B			14/2 - 10/3
621-NM	3/4"		NM-B			8/3 - 6/3
630-NM2	3/4"		NM-B			
651SP	1/2"		NM-B			14/2-10/3
695-DC2	3/4"	.48-.64	JMC/ TECK90			12/2-10/3 JMC
					12/2-14/4 TECK	
74ASP ¹	3/4"	.73-.85	AC/AC90/ACG90/MC/MCI-A/MC-PCS	HCF	1/2" FMC	8/3 - 6/3
7474ASP	3/4"	.73-.83	AC/AC90/ACG90/MC/MCI-A/MC-PCS	HCF/HCFMCI-A	1/2" FMC	8/4 - 6/3
7474SP	3/4"	.73-.83	AC/MC/MCI-A/MC-PCS	HCF/HCFMCI-A	1/2" FMC	8/4 - 6/3
802SP	1/2"	.48-.58	AC/MC/MC-PCS	HCF	3/8" FMC	12/2 - 10/3
840SP	1/2"	.44-.61	AC/MC/MCI-A	HCF/HCFMCI-A	3/8" FMC	14/4 - 10/3
84690SP	1/2"	.42-.61	AC/MC/MCI-A	HCF/HCFMCI-A	3/8" FMC	14/4 - 10/3
850SP	1/2"	.55-.61	AC/MC	HCF	3/8" FMC	12/2 - 10/3
851ASP	1/2"				1/2" FMC	
851SP	1/2"				1/2" FMC	
895-DC2	1/2"	.50-.61	JMC/ TECK90			12/2 - 10/3
895-DCI2	1/2"	.50-.61	JMC/ TECK90			12/2 - 10/3
4156-DC**	1/2"	.43-.52	AM/MC/MCI-A	HCF/HCFMCI-A	3/8" FMC	14/2 - 12/2
4195-DC***	3/4"	.48-.64	JMC/TECK90			12/2-10/3 JMC
					12/2-14/4 TECK	
4357-DC**	1"	.43-.61	AC/MC/MCI-A	HCF/HCFMCI-A	3/8" FMC	14/2 - 10/3
4357-NM	3/4"		NM-B			
4457-DC**	1"	.43-.61	AC/MC/MCI-A	HCF/HCFMCI-A	3/8" FMC	14/2 - 10/3
5195-DC**	3/4"	.48-.64	JMC/TECK90			12/2-10/3 JMC
					12/2-14/4 TECK	
AMC-50	1/2"	.40-.62	AC/MC/MCI-A	HCF/HCFMCI-A	3/8" FMC	14/2 - 10/3
AMC-5075	1/2"	.62-.92	AC/MC/MCI-A	HCF/HCFMCI-A	1/2" FMC	10/4 - 6/4
AMC-52	1/2"	.43-.62	AC/MC/MCI-A	HCF/HCFMCI-A	3/8" FMC	14/2 - 10/3
AMC-75	3/4"	.56-.81	AC/MC	HCF	1/2" FMC	10/3 - 6/3
AMC-50QI	1/2"	.40-.61	AC/MC/MCI-A	HCF/HCFMCI-A	3/8" FMC	14/2 - 10/3
AMC-52QI	1/2"	.40-.61	AC/MC/MCI-A	HCF/HCFMCI-A	3/8" FMC	14/2 - 10/2
GF38SP	1/2"				3/8" FMC	
GF50SP	1/2"				1/2" FMC	
SG3838ASP	1/2"	.42-.61	AC/MC/MCI-A	HCF/HCFMCI-A	3/8" FMC	14/2 - 10/3
SG38ASP	1/2"	.42-.61	AC/MC/MCI-A	HCF/HCFMCI-A	3/8" FMC	14/2 - 10/3

¹SUITABLE FOR USE WITH MC-PCS POWER AND CONTROL ALONG WITH MULTI-CONDUCTOR MC CABLES (PER OUTSIDE DIAMETER OF CABLE)
*EMT TO FMC/AC/MC COMBINATION COUPLING ** EMT TO MULTI MC COMBINATION COUPLING *** RIGID TO MULTI JMC TRANSITION COUPLING

