

B BRIDGEPORT[®]

E-Z LOCK[®]
CONNECTORS
QUICK INSTALL SOLUTIONS

PRODUCT BROCHURE





WE HAVE YOU COVERED

LINE TO LOAD

4 REASONS CONTRACTORS WANT E-Z LOCK

1

Easy to snap-in:

Saves time

2

Easy to remove:

Makes rework a snap

3

Stays tight in knockout:

Ensures electrical continuity


4

Accepts a large range of cable types and sizes:

Fewer connectors to stock

CABLE AND CONDUIT FITTINGS FROM LINE TO LOAD

The trusted name of Bridgeport Fittings carries all the essential fittings professionals need to do their best work. We design every product to guarantee a trouble-free installation that keeps contractors satisfied and coming to your store. Our Made-in-America offering is reliably in stock, and as part of the NSI family of brands, Bridgeport is able to offer industry-leading service, support, ease of business and profitability.

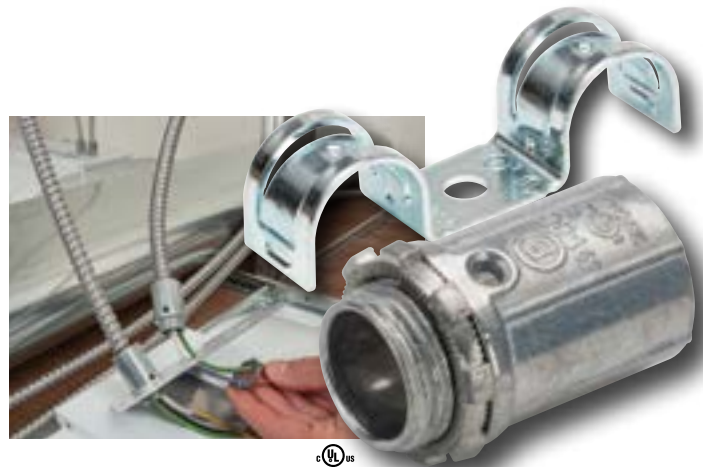

CONNECT AND SUPPORT MC-PCS LUMINARY CABLES

E-Z LOCK® 590 SERIES MC Cable Connectors
Mighty-Hold® USD Series Duplex Universal Straps

FIRE SPRINKLER SYSTEM CONNECTIONS

E-Z LOCK® 74ASP Snap-In MC Cable Connectors
Mighty-Hold® UCS Series Universal Clamp Straps




RAINTIGHT EMT FOR OUTDOOR LIGHTED PANEL SIGN

MIGHTY-SEAL® 251-RT2XL Extra-Long Thread EMT Connectors
MIGHTY-SEAL® LB-42RT Conduit Body with Integral Raintight EMT Connectors




PREFABRICATED MULTIPLE LIGHTING CONNECTIONS

MIGHTY-MERGE® 4457-DC Multi Port MC Cable to EMT Transition Couplings
E-Z LOCK® 590-DC2 MC Cable Connectors

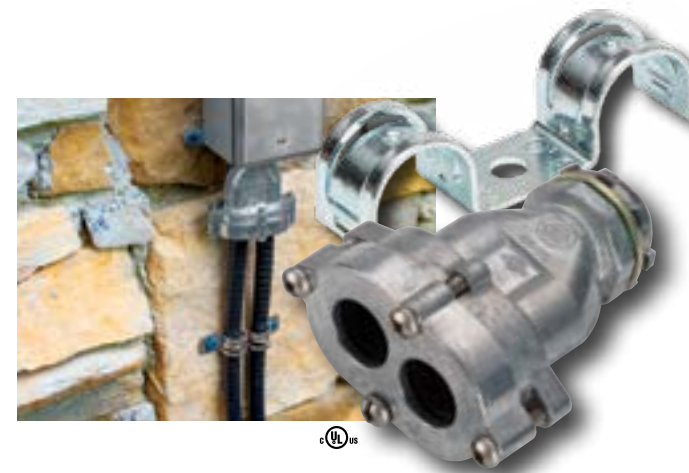

SITE LIGHTING CONNECTIONS WITH DUPLEX JACKETED MC/TECK CABLE

MIGHTY-SEAL® 695-DC2 Duplex Jacketed MC Cable Connectors
Mighty-Hold® USS-6171 Stainless Steel Universal Straps

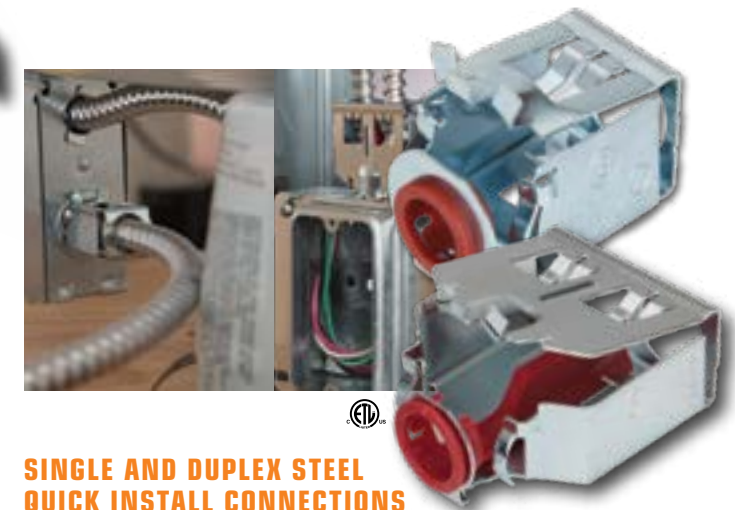


SINGLE AND DUPLEX STEEL QUICK INSTALL CONNECTIONS

E-Z LOCK® AMC-50QI MC Cable Connectors
E-Z LOCK® AMC-52QI Duplex MC Cable Connectors



JACKETED MC CABLE CONNECTION AND SUPPORT

MIGHTY-SEAL® 595-DC2C Polyolefin Coated Jacketed MC Connectors
MIGHTY-HOLD® Stainless Steel Jacketed MC Straps

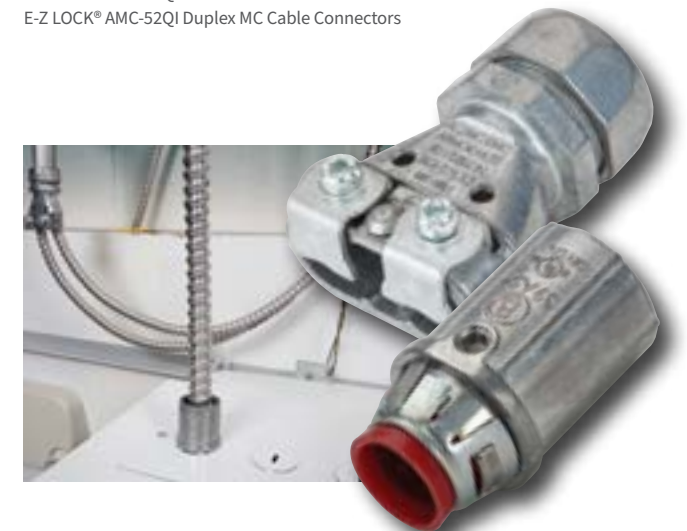

FIRE SPRINKLER SYSTEM CONNECTIONS

MIGHTY-MERGE® 5157-DC Compression EMT to MC Transition Couplings
E-Z LOCK® 39ASP Snap-In MC Cable Connectors

38ASP E-Z LOCK® CONNECTORS



ZINC DIE CAST –
INSULATED THROAT – 105°C

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
38ASP	1/2"	50	500

39ASP E-Z LOCK® CONNECTORS



ZINC DIE CAST –
INSULATED THROAT – 105°C

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
39ASP	1/2"	50	500

74ASP E-Z LOCK® CONNECTORS



ZINC DIE CAST –
INSULATED THROAT – 105°C

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
74ASP	3/4"	25	100

BRANCH CIRCUIT SNAP-IN SOLUTIONS DRY LOCATION

3838ASP E-Z LOCK® CONNECTORS



ZINC DIE CAST –
INSULATED THROAT – 105°C

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
3838ASP	1/2"	20	200
3939ASP	1/2"	25	100
7474ASP	3/4"	20	100

38ACDS DOUBLE SNAP OLD WORK CONNECTORS



ZINC DIE CAST –
INSULATED THROAT – 105°C

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
38ACDS	1/2"	50	500


SG38ASP E-Z LOCK® CONNECTORS



ZINC DIE CAST –
INSULATED THROAT – 105°C

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
SG38ASP	1/2"	50	500

SG3838ASP E-Z LOCK® CONNECTORS

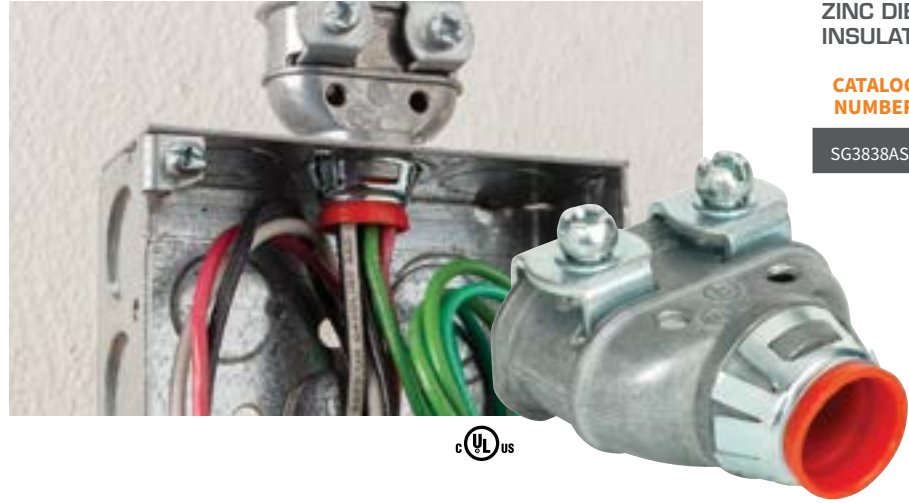

ZINC DIE CAST –
INSULATED THROAT – 105°C

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
SG3838ASP	1/2"	20	200



AMC-50QI E-Z LOCK® CONNECTORS




ZINC PLATED STEEL –
INSULATED THROAT – 105°C

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
AMC50QI	1/2"	50	500



**BRANCH CIRCUIT SNAP-IN SOLUTIONS
DRY LOCATION**

AMC-52QI E-Z LOCK® CONNECTORS

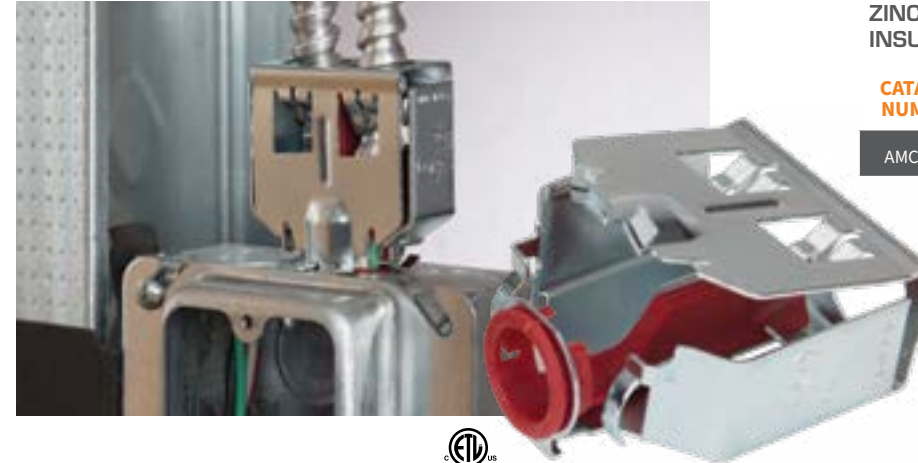

ZINC PLATED STEEL –
INSULATED THROAT – 105°C

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
AMC-52QI	1/2"	25	250



AMC SERIES E-Z LOCK® CONNECTORS



ZINC PLATED STEEL –
INSULATED THROAT – 105°C

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
AMC-50	1/2"	50	500
AMC-5075	1/2"	25	250
AMC-52	1/2"	25	250
AMC-75	3/4"	50	100



4157-DC MIGHTY-MERGE® TRANSITION COUPLINGS



ZINC DIE CAST - SET SCREW EMT STYLE

CATALOG NUMBER	EMT TRADE SIZE	FLEX TRADE SIZE	UNIT QTY	STD PKG QTY
4157-DC	3/4"	3/8"	25	100



5157-DC MIGHTY-MERGE® TRANSITION COUPLINGS



ZINC DIE CAST - COMPRESSION EMT STYLE

CATALOG NUMBER	EMT TRADE SIZE	FLEX TRADE SIZE	UNIT QTY	STD PKG QTY
5157-DC	3/4"	3/8"	25	100



**4357-DC MIGHTY-MERGE® TRANSITION COUPLINGS
WITH E-Z LOCK TECHNOLOGY**



ZINC DIE CAST - COMPRESSION EMT STYLE

CATALOG NUMBER	EMT TRADE SIZE	FLEX TRADE SIZE	UNIT QTY	STD PKG QTY
4357-DC	1"	3/8"	5	20



**4457-DC MIGHTY-MERGE® TRANSITION COUPLINGS
WITH E-Z LOCK TECHNOLOGY**



ZINC DIE CAST

CATALOG NUMBER	EMT TRADE SIZE	FLEX TRADE SIZE	UNIT QTY	STD PKG QTY
4457-DC	1"	3/8"	5	20



**4156-DC MIGHTY-MERGE® TRANSITION COUPLINGS
WITH E-Z LOCK TECHNOLOGY**



ZINC DIE CAST

CATALOG NUMBER	EMT TRADE SIZE	FLEX TRADE SIZE	UNIT QTY	STD PKG QTY
4156-DC	1/2"	3/8"	10	40



BRANCH CIRCUIT BACK END SNAP/FRONT END LOCKNUT SOLUTIONS DRY LOCATION

590 SERIES E-Z LOCK® CONNECTORS




ZINC DIE CAST

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
590-DC2	1/2"	50	500
591-DC2	1/2"	50	200
592-DC2	3/4"	25	100

ZINC PLATED STEEL –
INSULATED THROAT – 105°C

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
590-DC12	1/2"	50	500

3838-DC2 E-Z LOCK® CONNECTORS

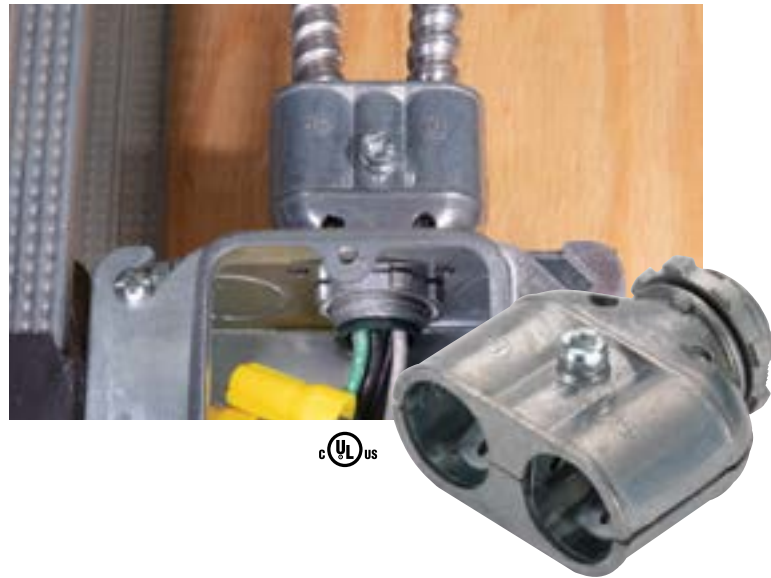

ZINC DIE CAST

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
3838-DC2	1/2"	20	200

ZINC PLATED STEEL –
INSULATED THROAT – 105°C

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
3838-DC12	1/2"	20	200

BRANCH CIRCUIT MULTI-PORT SNAP-IN SOLUTIONS DRY LOCATION

US SERIES MIGHTY-HOLD® UNIVERSAL STRAPS



ZINC PLATED STEEL

CATALOG NUMBER	AC/MC CABLERANGE MIN	AC/MC CABLERANGE MAX	UNIT QTY	STD PKG QTY
US-4461	14/2 (.425")	10/3 (.61")	100	1000
US-6171	10/4 (.617")	8/3 (.71")	100	1000

USD SERIES MIGHTY-HOLD® UNIVERSAL DUPLEX STRAPS



ZINC PLATED STEEL

CATALOG NUMBER	AC/MC CABLERANGE MIN	AC/MC CABLERANGE MAX	UNIT QTY	STD PKG QTY
3838ASP	14/2 (.425")	10/3 (.61")	100	1000
3939ASP	10/4 (.617")	8/3 (.71")	100	1000

38ASP E-Z LOCK® CONNECTORS



ZINC DIE CAST

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
595-DC2	1/2"	15	60
596-DC2	1/2"	15	60
597-DC2	3/4"	5	50

ZINC DIE CAST –
INSULATED THROAT – 105°C

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
595-DCI2	1/2"	15	60
596-DCI2	1/2"	15	60

895-DC2 90° MIGHTY-SEAL® JMC CONNECTORS WITH E-Z LOCK® TECHNOLOGY



ZINC DIE CAST

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
895-DC2	1/2"	10	40

ZINC DIE CAST –
INSULATED THROAT – 105°C

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
895-DCI2	1/2"	10	40

590 SERIES MIGHTY-SEAL® POLYOLEFIN COATED JMC CONNECTORS WITH E-Z LOCK® TECHNOLOGY



POLYOLEFIN ZINC DIE CAST

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
595-DC2C	1/2"	10	40
596-DC2C	1/2"	15	60

SUITABLE FOR DIRECT BURIAL

BRANCH CIRCUIT MULTI-PORT SNAP-IN SOLUTIONS DRY LOCATION

895-DC2C 90° MIGHTY-SEAL® POLYOLEFIN COATED JMC CONNECTORS WITH E-Z LOCK® TECHNOLOGY



ZINC DIE CAST –
INSULATED THROAT – 105°C

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
895-DC2C	1/2"	10	40

SUITABLE FOR DIRECT BURIAL

695-DC2 MIGHTY-SEAL® JMC CONNECTORS



ZINC DIE CAST –
INSULATED THROAT – 105°C

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
695-DC2	3/4"	10	40

4195-DC MIGHTY-SEAL® RIGID TO DUPLEX JMC TRANSITION COUPLINGS WITH E-Z LOCK® TECHNOLOGY



ZINC DIE CAST –
INSULATED THROAT – 105°C

CATALOG NUMBER	K.O. SIZE	UNIT QTY	STD PKG QTY
4195-DC	3/4"	10	40

BRANCH CIRCUIT SOLUTIONS WET LOCATION

5195-DC MIGHTY-SEAL® EMT TO DUPLEX JMC TRANSITION COUPLINGS WITH E-Z LOCK® TECHNOLOGY



ZINC DIE CAST - SET SCREW EMT STYLE

CATALOG NUMBER	EMT TRADE SIZE	FLEX TRADE SIZE	UNIT QTY	STD PKG QTY
5195-DC	3/4"	3/8"	10	40

USS-6171 MIGHTY-HOLD® UNIVERSAL STRAPS



ZINC PLATED STEEL

CATALOG NUMBER	AC/MC CABLE RANGE MIN	MAX	UNIT QTY	STD PKG QTY
USS-6171	12/2 (.55")	10/3 (.71")	100	1000

BRIDGEPORT'S COMPLETE LINE OF QUICK INSTALL CABLE SOLUTIONS

CABLE FITTING	ENCLOSURE OPENING K.O. SIZE	CABLE OUTER DIAMETER (O.D.) RANGE	CABLE TYPES LISTED TO NOTE: INCLUDES STEEL AND ALUMINUM	HEALTHCARE FACILITY CABLE	FLEXIBLE METAL CONDUIT NOTE: INCLUDES STEEL AND ALUMINUM (RWFMC)	RECOMMENDED CABLE TYPES NOTE: VERIFY WITH CABLE O.D. INCLUDES STEEL AND ALUMINUM
38ASP ¹	1/2"	.40-.61	AC/MC/MCI-A/MC-PCS	HCF	3/8" FMC/RWFMC	14/2 - 10/3
39ASP ¹	1/2"	.54-.73	AC/AC90/ACG90/MC/MCI-A/MC-PCS	HCF		10/2 - 8/3
38ACDS	1/2"	.40-.63	AC/MC/MCI-A	HCF	3/8" FMC/RWFMC	14/2 - 10/3
3838ASP	1/2"	.38-.59	AC/MC/MCI-A/MC-PCS	HCF/HCFMCI-A	3/8" FMC	14/2 - 10/3
3838SP	1/2"	.38-.59	AC/MC/MCI-A/MC-PCS	HCF/HCFMCI-A	3/8" FMC	14/2 - 10/3
3939ASP	1/2"	.54 - .73	AC/AC90/ACG90/MC/MCI-A/MC-PCS	HCF/HCFMCI-A		10/3-8/3
3939SP	1/2"	.54 - .73	AC/MC/MCI-A/MC-PCS	HCF/HCFMCI-A		10/3-8/3
280SP*	1/2"	.43-.61	AC/MC/MCI-A	HCF/HCFMCI-A	3/8" FMC	14/2 - 10/3
280SPMB*	1/2"	.43-.61	AC/MC/MCI-A	HCF/HCFMCI-A	3/8" FMC	14/2 - 10/3
281SPMB*	3/4"	.61-.69	AC/MC/MCI-A	HCF/HCFMCI-A	3/8" FMC	10/4 - 8/3
3838-DC2	1/2"	.38-.59	AC/MC/MCI-A	HCF/HCFMCI-A	3/8" FMC	14/2 - 10/2
3838-DCI2	1/2"	.38-.59	AC/MC/MCI-A	HCF/HCFMCI-A	3/8" FMC	14/2 - 10/2
560MCI-A	1/2"	.38-.55	MC/MCI-A	HCFMCI-A		14/2 - 10/3
540-SS	1/2"				3/8" FMC	-
590-DC2	1/2"	.43-.61	AC/MC/MCI-A	HCF/HCFMCI-A	3/8" FMC	14/2 - 10/3
591-DC2	1/2"	.60-.73	AC/AC90/ACG90/MC/MCI-A	HCF		10/2 - 8/3
592-DC2	3/4"	.73-.85	AC/AC90/ACG90/MC/MCI-A	HCF	1/2" FMC/RWFMC	8/3 - 6/3
590-DCI2	1/2"	.43-.61	AC/MC/MCI-A	HCF/HCFMCI-A	3/8" FMC	14/2 - 10/3
595-DC2	1/2"	.50-.61	JMC/ TECK90			12/2 - 10/3
595-DC2C	1/2"	.50-.61	JMC/ TECK90			12/2 - 10/3
595-DCI2	1/2"	.50-.61	JMC/ TECK90			12/2 - 10/3
596-DC2	1/2"	.61-.69	JMC/ TECK90			10/4 - 8/3
596-DC2C	1/2"	.61-.69	JMC/ TECK90			10/4 - 8/3
596-DCI2	1/2"	.61-.69	JMC/ TECK90			10/4 - 8/3
597-DC2	3/4"	.83-.84	JMC/ TECK90			8/3 - 6/3
616-NMD	1/2"		NM-B			14/2 - 6/2
617-NMD	3/4"		NM-B			8/2 - 6/3
620-NM	1/2"		NM-B			14/2 - 10/3
621-NM	3/4"		NM-B			8/3 - 6/3
630-NM2	3/4"		NM-B			
651SP	1/2"		NM-B			14/2-10/3
695-DC2	3/4"	.48-.64	JMC/ TECK90			12/2-10/3 JMC 12/2-14/4 TECK
74ASP ¹	3/4"	.73-.85	AC/AC90/ACG90/MC/MCI-A/MC-PCS	HCF	1/2" FMC	8/3 - 6/3
7474ASP	3/4"	.73-.83	AC/AC90/ACG90/MC/MCI-A/MC-PCS	HCF/HCFMCI-A	1/2" FMC	8/4 - 6/3
7474SP	3/4"	.73-.83	AC/MC/MCI-A/MC-PCS	HCF/HCFMCI-A	1/2" FMC	8/4 - 6/3
802SP	1/2"	.48-.58	AC/MC/MC-PCS	HCF	3/8" FMC	12/2 - 10/3
840SP	1/2"	.44-.61	AC/MC/MCI-A	HCF/HCFMCI-A	3/8" FMC	14/4 - 10/3
84690SP	1/2"	.42-.61	AC/MC/MCI-A	HCF/HCFMCI-A	3/8" FMC	14/4 - 10/3
850SP	1/2"	.55-.61	AC/MC	HCF	3/8" FMC	12/2 - 10/3
851ASP	1/2"				1/2" FMC	
851SP	1/2"				1/2" FMC	
895-DC2	1/2"	.50-.61	JMC/ TECK90			12/2 - 10/3
895-DCI2	1/2"	.50-.61	JMC/ TECK90			12/2 - 10/3
4156-DC**	1/2"	.43-.52	AM/MC/MCI-A	HCF/HCFMCI-A	3/8" FMC	14/2 - 12/2
4195-DC***	3/4"	.48-.64	JMC/TECK90			12/2-10/3 JMC 12/2-14/4 TECK
	4357-DC**	1"	.43-.61	AC/MC/MCI-A	HCF/HCFMCI-A	3/8" FMC 14/2
- 10/3						
4357-NM	3/4"		NM-B			
4457-DC**	1"	.43-.61	AC/MC/MCI-A	HCF/HCFMCI-A	3/8" FMC	14/2 - 10/3
5195-DC**	3/4"	.48-.64	JMC/TECK90			12/2-10/3 JMC 12/2-14/4 TECK
AMC-50	1/2"	.40-.62	AC/MC/MCI-A	HCF/HCFMCI-A	3/8" FMC	14/2 - 10/3
AMC-5075	1/2"	.62-.92	AC/MC/MCI-A	HCF/HCFMCI-A	1/2" FMC	10/4 - 6/4
AMC-52	1/2"	.43-.62	AC/MC/MCI-A	HCF/HCFMCI-A	3/8" FMC	14/2 - 10/3
AMC-75	3/4"	.56-.81	AC/MC	HCF	1/2" FMC	10/3 - 6/3
AMC-50QI	1/2"	.40-.61	AC/MC/MCI-A	HCF/HCFMCI-A	3/8" FMC	14/2 - 10/3
AMC-52QI	1/2"	.40-.61	AC/MC/MCI-A	HCF/HCFMCI-A	3/8" FMC	14/2 - 10/2
GF38SP	1/2"				3/8" FMC	
GF50SP	1/2"				1/2" FMC	
SG3838ASP	1/2"	.42-.61	AC/MC/MCI-A	HCF/HCFMCI-A	3/8" FMC	14/2 - 10/3
SG38ASP	1/2"	.42-.61	AC/MC/MCI-A	HCF/HCFMCI-A	3/8" FMC	14/2 - 10/3

¹SUITABLE FOR USE WITH MC-PCS POWER AND CONTROL ALONG WITH MULTI-CONDUCTOR MC CABLES (PER OUTSIDE DIAMETER OF CABLE)
*EMT TO FMC/AC/MC COMBINATION COUPLING ** EMT TO MULTI MC COMBINATION COUPLING *** RIGID TO MULTI JMC TRANSITION COUPLING



**To order, contact your
local sales representative.**

nsiindustries.com/electrical/bridgeport

800.321.5847

Scan for Bridgeport's
Full Line of Cable
& Conduit Fittings

