


FEATURES:

1. Material: TiN Plated CU
2. UL listed for U.S. & Canada.
3. Wire connector rated for 35Kv max.
4. Class B/C compressed, concentric, and compact copper conductor.
5. Expanded wire range when installed with dieless NSi compression tool (N12ID).
6. Dimensions are for reference only.



C Series: C-6



PROGRAM:	SOLIDWORKS
UPDATED:	9/2022
SALES REV:	A
SIZE:	B (11x17)

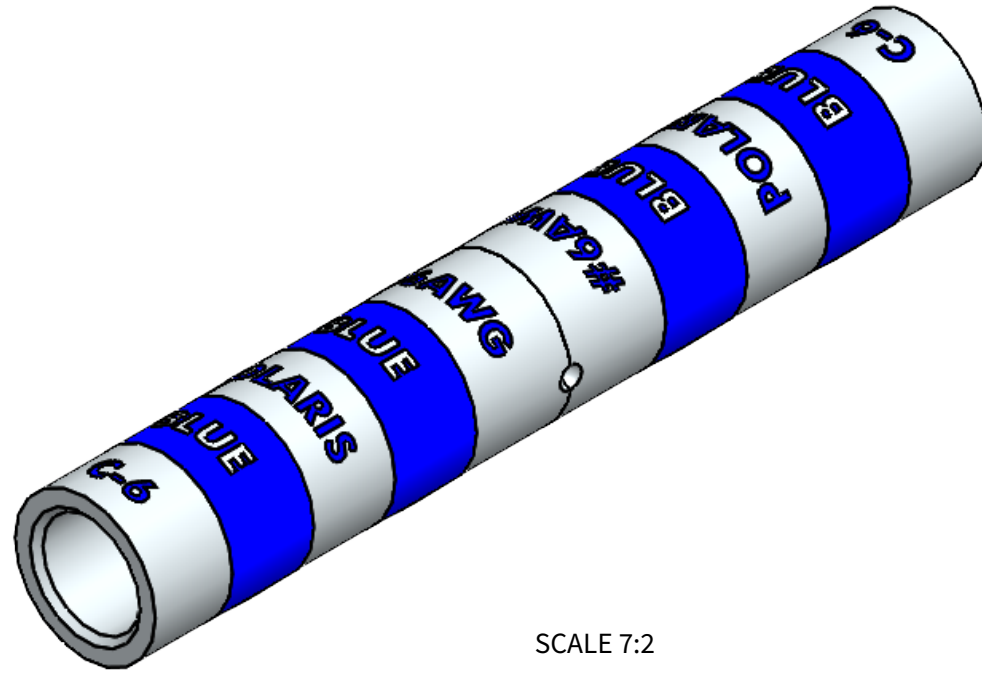

SCALE 7:2

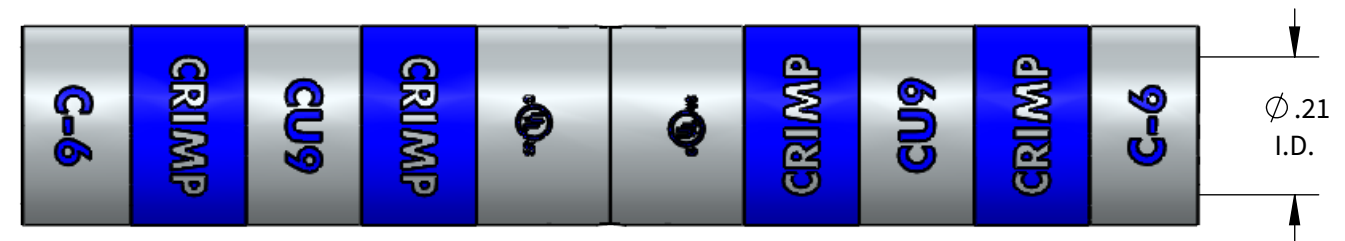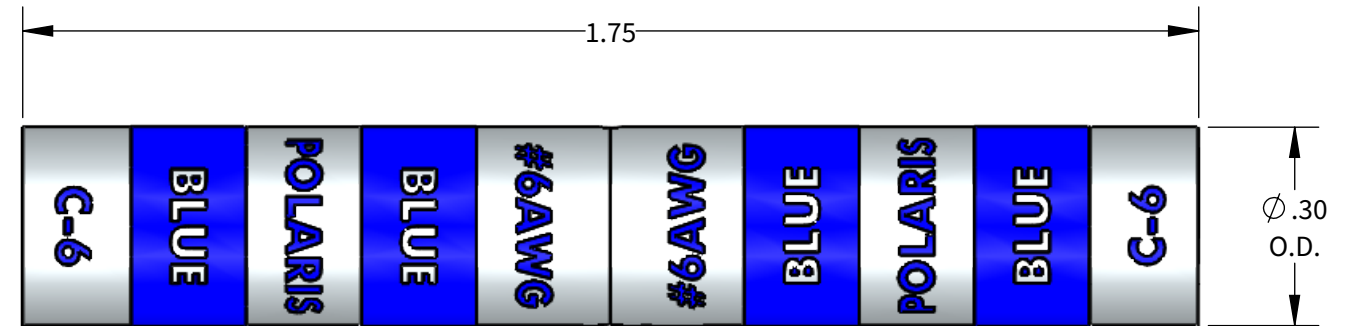

COPPER COMPRESSION CONNECTOR TOOL AND DIE CHART (# OF CRIMPS PER SIDE)

WIRE SIZE	STRIP LENGTH	DIE COLOR	EXPANDED WIRE RANGE W/N12ID	COPPER COMPRESSION CONNECTOR TOOL AND DIE CHART (# OF CRIMPS PER SIDE)								
				NSI			GREENLEE & ILSCO		BURNDY	T&B	HUSKIE	
#6AWG	15/16"	BLUE	#6AWG-#8AWG	N1240 SERIES KC12-6 (2)	NSI-12 CD2 (4)	NSI-12 HT41GL (4)	GREENLEE 1240 SERIES ILSCO ILC-12, ILC-15 KC12-6 (2) ILD-2 (4)		Y-35, Y750, PAT 750 U5CRT (2)	TBM-15, TBM-14M 15522 (4)	EP510C HT41GL (4) CD2 (4)	

