


FEATURES:

1. Material: TiN Plated CU
2. UL listed for U.S. & Canada.
3. Wire connector rated for 35Kv max.
4. Class B/C compressed, concentric, and compact copper conductor.
5. Expanded wire range when installed with dieless NSi compression tool (N12ID).
6. Dimensions are for reference only.



SC Series: SC-4



PROGRAM:	SOLIDWORKS
UPDATED:	9/2022
SALES REV:	A
SIZE:	B (11x17)

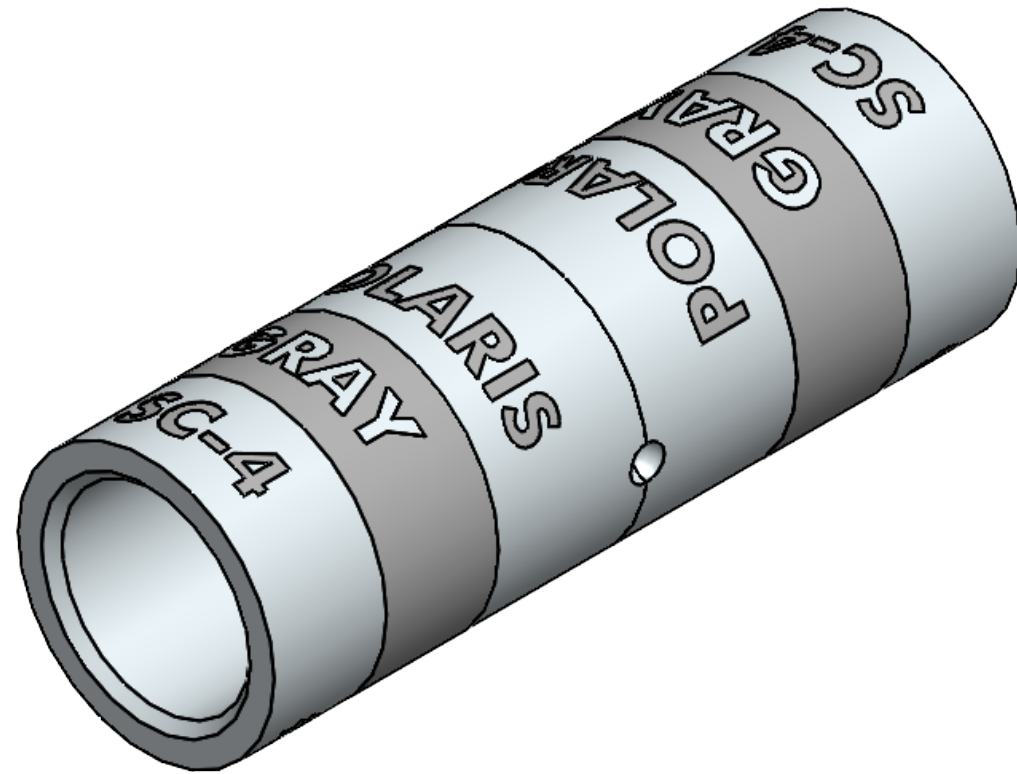

SCALE 11:2

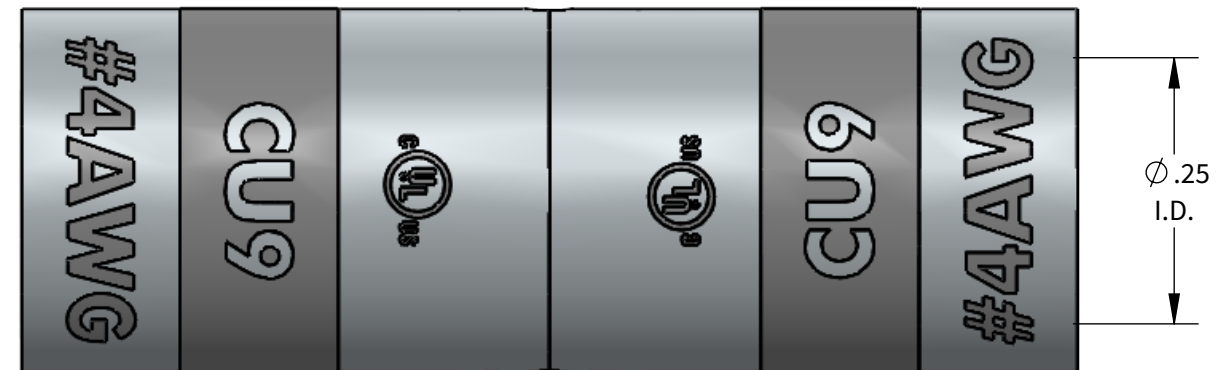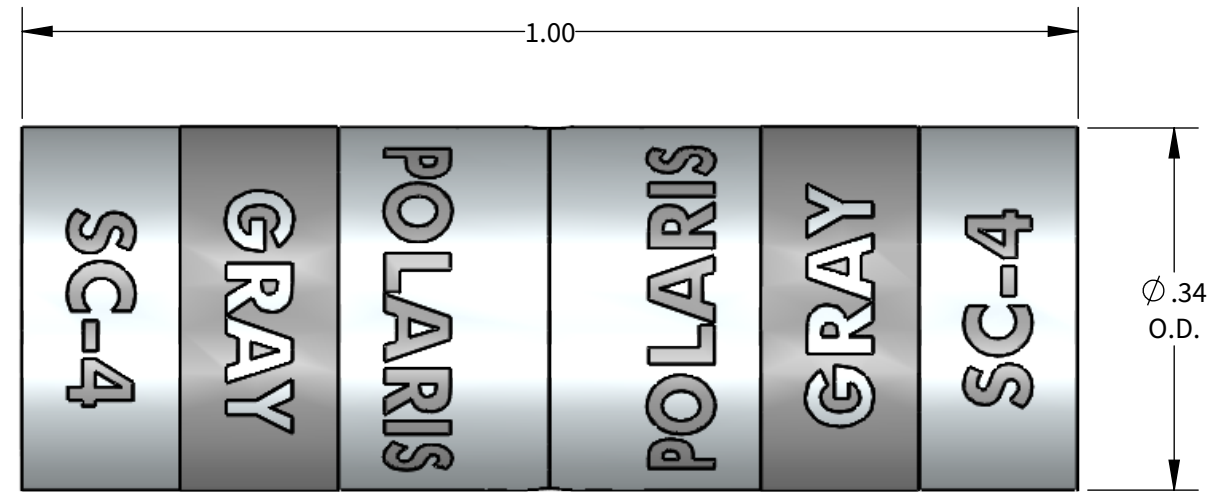

COPPER COMPRESSION CONNECTOR TOOL AND DIE CHART (# OF CRIMPS PER SIDE)

			COPPER COMPRESSION CONNECTOR TOOL AND DIE CHART (# OF CRIMPS PER SIDE)									
			NSI			GREENLEE & ILSCO		BURNDY	T&B	HUSKIE		
WIRE SIZE	STRIP LENGTH	DIE COLOR	EXPANDED WIRE RANGE W/N12ID	N1240 SERIES	NSI-12	NSI-12	GREENLEE 1240 SERIES ILSCO ILC-12, ILC-15	Y-35, Y750, PAT 750	TBM-15, TBM-14M	EP510C		
#4AWG	9/16"	GRAY	#4AWG-#6AWG	KC12-4 (1)	CD3 (2)	HT41AU (2)	KC12-4 (1) ILC-3 (2)	U4CRT (1)	15527-CK (2)	HT41AU (2)	CD3 (2)	

