



FEATURES

Adjustable Multiple Spots are cluster fixtures that are built on an adjustable frame. They are used in applications where uniform controlled light needs to be directed to a particular area, either as task or accent lighting.

SPECIFICATIONS

Light Source:	1 x 11 W Integrated LED
Beam Angle:	30°
Kelvin:	*3000K
*For 2700K, 3500K, 4000K please contact sales@eurofase.com	
Initial Lumens:	962 Lm
Delivered Lumens:	686 Lm
CRI:	90+
Dimming:	TRIAC/0-10V
Color:	Black/White
Input:	24V DC (Remote Driver required)
Vertical Rotation:	90°
Dimension:	5.67" L x 1.30" W x 4" H
Approval:	Indoor use

Electrical Approval:




COMPLIANT

Warranty:




DIAGRAM

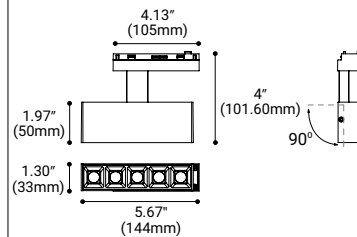

PHOTOMETRICS

H(m)	D(m)	E(lx)
30°		
1.0	0.62	1854
2.0	1.24	463
3.0	1.86	206
4.0	2.48	115
5.0	3.10	74




1 m = 3.28 ft
1 lx = 0.09 fc

COMPATIBLE CHANNELS


SURFACE MOUNT



PENDANT




TRIM RECESSED

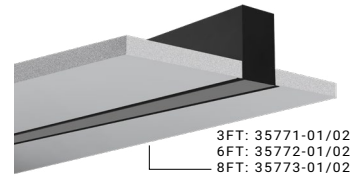

3FT: 35771-01/02
6FT: 35772-01/02
8FT: 35773-01/02

TRIMLESS RECESSED

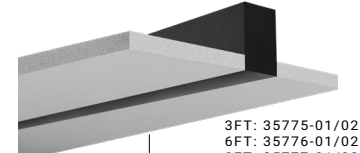

3FT: 35775-01/02
6FT: 35776-01/02
8FT: 35777-01/02

ORDERING OPTIONS



Black
36379-01



White
36379-02

COMPATIBLE DRIVERS



30264-014
TRIAC dimming



44912-017
0-10V dimming