


FEATURES:

1. Versatile and reusable set-screw connectors made from high strength 6061-T6 aluminum alloy for superior electrical and mechanical performance.
2. Two set-screws per wire hole ensure an exceptional connection.
3. Electro-tin plated for low contact resistance.
4. For use with copper or aluminum conductors.
5. Mounting hole spacing is NEMA 1 3/4" spacing.



PROGRAM:	SOLIDWORKS
UPDATED:	09/2024
SALES REV:	A
SIZE:	B (11x17)

MECHANICAL CONNECTORS: LL SERIES ALUMINUM, HEAVY DUTY TRANSFORMER LUGS

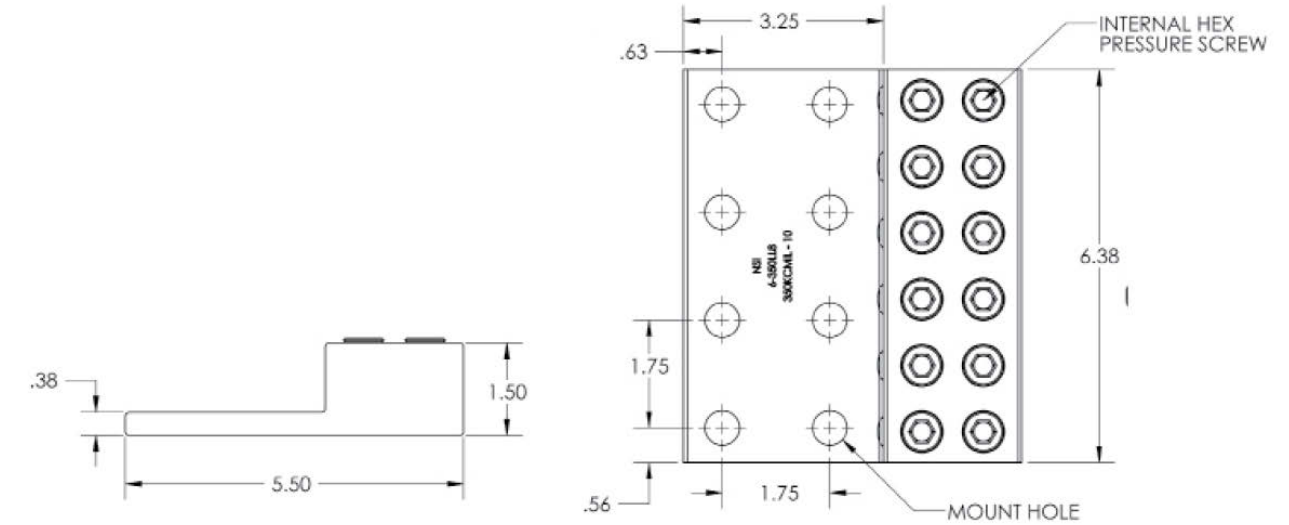

CAT. NO.	FIG. NO.	WIRE RANGE	MAX TORQUE VALUE (IN./LBS.)	NO. OF CONDUCTORS	NO. OF MTG. HOLES	MTG. HOLE DIA. (IN.)	MTG. HOLE SPACING (IN.)	HEX WRENCH SIZE (IN.)	BOLT SIZE (IN.)	LENGTH (L) (IN.)	WIDTH (W) (IN.)	HEIGHT (H) (IN.)	STD. CTN. QTY.
350LL2	1	350 MCM-6 AWG	400	1	2	0.563	1.750	3/8	1/2	5.310	1.130	1.380	1
2-350LL4	2	350 MCM-6 AWG	400	2	4	0.563	1.750	3/8	1/2	5.310	2.000	1.380	1
3-350LL4	3	350 MCM-6 AWG	400	3	4	0.563	1.750	3/8	1/2	5.310	2.940	1.380	1
4-350LL6	4	350 MCM-6 AWG	400	4	6	0.563	1.750	3/8	1/2	5.310	3.870	1.380	1
6-350LL8	5	350 MCM-6 AWG	400	6	8	0.563	1.750	3/8	1/2	5.310	5.750	1.380	1
8-350LL8	6	350 MCM-6 AWG	400	8	8	0.563	1.750	3/8	1/2	5.310	7.620	1.380	1
8-350LL10	6	350 MCM-6 AWG	400	8	10	0.563	1.750	3/8	1/2	5.310	7.620	1.380	1
2-600LL4	2	600 MCM-2 AWG	550	2	4	0.563	1.750	3/8	1/2	5.875	2.410	1.562	1
4-600LL6	4	600 MCM-2 AWG	550	4	6	0.563	1.750	3/8	1/2	5.875	4.780	1.562	1
6-600LL6	6	600 MCM-2 AWG	550	6	6	0.563	1.750	3/8	1/2	8.750	5.750	1.750	1
2-800LL4	2	800-300 MCM	550	2	4	0.563	1.750	1/2	1/2	6.188	2.737	1.875	1
4-800LL8	4	800-300 MCM	550	4	8	0.563	1.750	1/2	1/2	6.188	5.487	1.875	1
2-1000LL4	2	800-300 MCM	550	2	4	0.563	1.750	1/2	1/2	6.188	2.982	1.875	1
4-1000LL8	4	1000-500 MCM	600	4	8	0.563	1.750	1/2	1/2	6.188	5.982	1.875	1
8-1000LL12	6	1000-500 MCM	600	8	12	0.563	1.750	1/2	1/2	6.188	11.982	1.875	1

SPECIFICATIONS:

- Meets or exceeds ANSI C119.4 Class A . AL9CU
- Temperature Rating: 90 °C. AL9CU.
- Voltage: 600V max.

