

2"

45360 TRIMLESS SQUARE FIXED DOWNLIGHT



PROJECT:

TYPE:

DATE:

NOTES:



2700K . 3000K . 3500K . 4000K . 5000K

The Midway collection is a family of integrated led recessed lights available in sizes ranging from 2"-6". With their durable die cast aluminum bodies and built on CCT color selecting switch Midway family fixtures are aesthetically appealing, functional and extremely versatile. Their IC rated shallow bodies allow them to be used in most residential and commercial installations with or without insulation in the ceiling. Midway fixtures are available in white or black finish and come standard with a reliable phase dimming power supply.

## SPECIFICATIONS

### LIGHT HOUSING

- IC Airtight Cast aluminum body.
- Remodel application. Mesh plate included.
- Mates to driver box with quick connector.
- Max Ceiling thickness 5/8".
- Approved for wet location.

### DIMENSIONS

- Cut hole:  $\varnothing$  2 7/8" x 2 7/8".
- Fixture:  $\varnothing$  4 1/16" x 5 9/16"H.

### ELECTRICAL

- 120 V Input class 2 constant current dimmable driver enclosed in junction box.
- TRIAC and ELV dimming.
- Min operating temperature (-4°F~104°F) (-20°C~40°C).

### LIGHT MODULE

- 1 x 15W Integrated LED COB.
- Lumen maintenance 70% 50,000 hrs.
- CRI: 90+
- Beam angle: 38 degree.
- Kelvin (CCT): 27K | 30K | 35K | 40K | 50K
- Delivered Lumen: 853 lm | 917 lm | 993 lm | 1029 lm | 1003 lm


### CERTIFICATIONS





## ORDERING GUIDE

| MODEL     | FINISH |
|-----------|--------|
| 45360-022 | Black  |
| 45360-015 | White  |

| WATTS | LUMENS     | KELVIN         | DIMMABLE  | CRI | BEAM ANGLE | ADJUSTABLE |
|-------|------------|----------------|-----------|-----|------------|------------|
| 15W   | Up to 1029 | CCT Selectable | TRIAC/ELV | 90+ | 38°        | NO         |



### PRODUCT DIMENSIONS

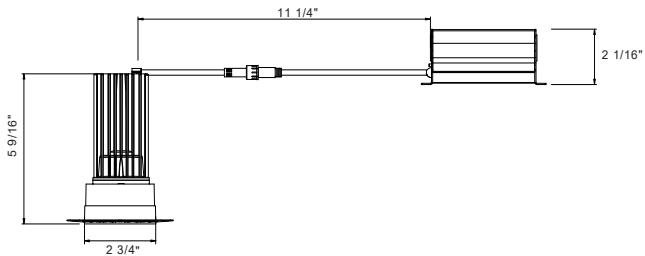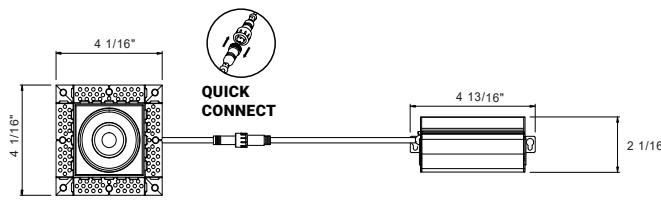

## ACCESSORIES





45599-019  
NEW CONSTRUCTION  
SMASH PLATE  
2 13/16" x 2 13/16"



### PHOTOMETRICS

#### Imperial

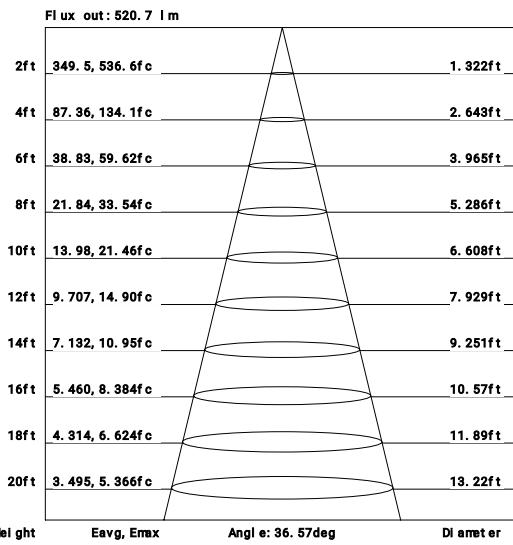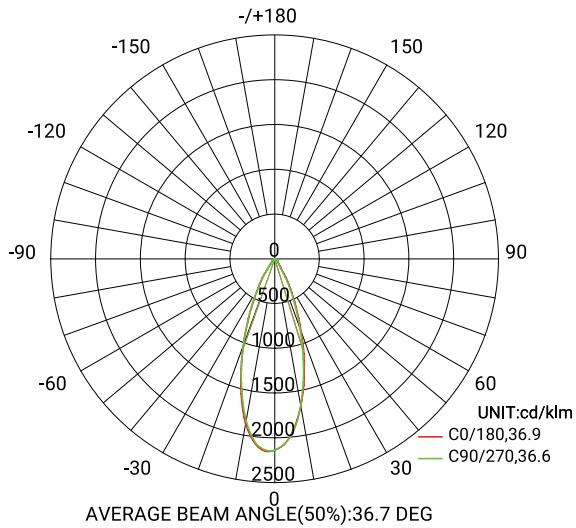

#### Metrics

