



FEATURES:

1. Multiple connectors are made from either copper or aluminum bar and can be used in a variety of neutral and grounding applications. Aluminum connectors are tin plated for low contact resistance and are suitable for use with copper or aluminum conductors. Aluminum connectors are dual rated for use with aluminum and copper cables.
2. Copper connectors are suitable for use with copper wire only
3. *Supplied with screws unassembled.



PROGRAM:	SOLIDWORKS
UPDATED:	09/2024
SALES REV:	A
SIZE:	B (11x17)

Multiple Connectors: Used in Neutral Assemblies & Grounding Applications

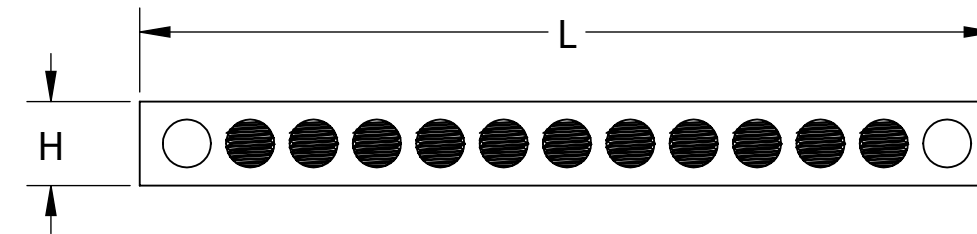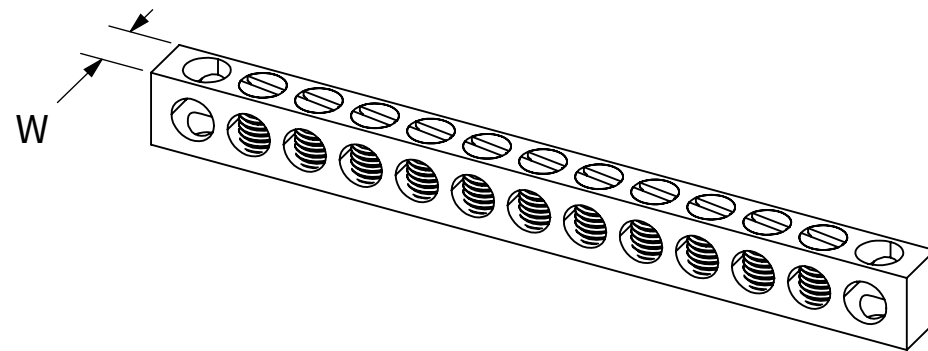

CAT.NO.	MATERIAL	WIRE RANGE	NO. OF CIRCUITS	TOTAL NO. OF HOLES	LENGTH (IN.)	HEIGHT (IN.)	WIDTH (IN.)	HOLE SPACING (IN.)	MTNG. HOLE POSITION
2-14-12311	Aluminum	2-14	10	12	4.120	0.500	0.380	0.340	3 & 11
2/0-14-32	Aluminum	2/0-14	2	3	1.750	0.750	0.560	0.601	2
2/0-14-524	Aluminum	2/0-14	3	5	2.950	0.750	0.560	0.601	2 & 4
2/0-14-818	Aluminum	2/0-14	6	8	4.750	0.750	0.560	0.312	1 & 8
4C-14-616	Copper	4-14	4	6	1.940	0.440	0.310	0.312	1 & 6
4C-14-717	Copper	4-14	5	7	2.250	0.440	0.310	0.312	1 & 7
4C-14-818	Copper	4-14	6	8	2.560	0.440	0.310	0.312	1 & 8
4C-14-14114	Copper	4-14	12	14	4.430	0.440	0.310	0.312	1 & 14
4C-14-15313	Copper	4-14	13	15	4.740	0.440	0.310	0.312	3 & 13
4C-14-15611	Copper	4-14	13	15	4.740	0.440	0.310	0.312	6 & 11
4C-190	Copper	4-14	190	190	60.00	0.440	0.310	0.312	-
2C-14-515	Copper	2-14	3	5	2.00	0.500	0.380	0.397	1 & 5
2C-14-827	Copper	2-14	6	8	3.250	0.500	0.380	0.397	2 & 7

