


Wire Harness Attachment Tape

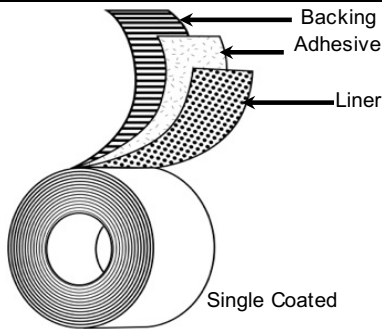

- Backing:** Low Density Polyethylene
- Adhesive:** Acrylic (A276)
- Liner:** 66# Clay Coated Paper Liner
- Colors:** Black, Clear
- Size Options:** Incremental sizes 1 1/2" - 54" x LY
- Specifications:** GM 9986080

Applications

- Wire harness attachment to headliners, flooring, and other surfaces in automotive, marine, recreational equipment, construction, and more
- Permanent surface attachments
- Anti-squeak, anti-itch headliner barrier
- Alternative to commonly used foil tapes

Features

- Low-density PE Film Backing
- Acrylic Adhesive
- 66# Paper Liner

Benefits

- Conformable for curves and irregular surfaces
- Low weight, cost effective alternative to foil
- Aggressive and permanent bond to headliner and harness surfaces
- Strong, locking bond to fabrics
- Excellent longevity
- Excellent high and low temperature performance
- Smooth clean release - easy to use
- Die cuttable

Typical Test Values

	Standard UOM		Metric UOM		Test Method
Total Thickness	7.0	mils	0.178	mm	PSTC-133
Backing Thickness	4.5	mils	0.114	mm	PSTC-133
Adhesive Thickness	2.5	mils	0.064	mm	PSTC-133
Adhesion to Steel	120	oz/in	13.13	N/cm	ASTM D-3330
Tensile Strength	11.5	lb/in	20.14	N/cm	ASTM D-3759
Elongation	500%				
Application Temperature	50 to 120 °F		10 to 49 °C		
Operating Temperature	-40 to 190 °F		-40 to 88 °C		

Recommended Storage Conditions: 40-60% Humidity, 60 - 80 °F
Standard Shelf Life (at 25 °C): 12 months from shipment date

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY GLOBAL'S knowledge it is true and accurate. How the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.