



FEATURES

Dual Baffle fixtures are also one piece but come with two light fixtures. These fixtures fit flush to the channel and ceiling line. They feature a clear lens for maximum light output and an inner ridge baffle for glare reduction and aesthetic appeal.

SPECIFICATIONS

Light Source:	1 x 4.5 W Integrated LED
Beam Angle:	35°
Kelvin:	*3000K
*For 2700K, 3500K, 4000K please contact sales@eurofase.com	
Initial Lumens:	398 Lm
Delivered Lumens:	301 Lm
CRI:	90+
Dimming:	TRIAC/0-10V
Color:	Black/White
Input:	24V DC (Remote Driver required)
Dimension:	4.13"L x 1.30"W x 2.24"H
Approval:	Indoor use
Electrical Approval:	   COMPLIANT
Warranty:	

ORDERING OPTIONS




Black
36377-01




White
36377-02

DIAGRAM



PHOTOMETRICS

H(m)	D(m)	E(lx)
35°		
1.0	0.62	753
2.0	1.25	188
3.0	1.88	83
4.0	2.51	47
5.0	3.14	30




1 m = 3.28 ft
1 lx = 0.09 fc

COMPATIBLE CHANNELS


SURFACE MOUNT




PENDANT



TRIM RECESSED

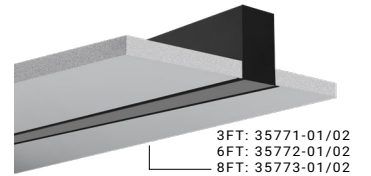

TRIMLESS RECESSED

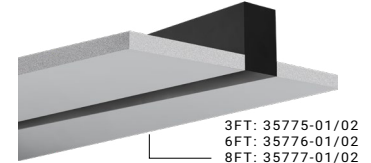

COMPATIBLE DRIVERS



30264-014
TRIAC dimming



44912-017
0-10V dimming