

CHART:

L	T
L ≤ 1M	±30MM
1M < L ≤ 5M	±50MM
5M < L ≤ 10M	±100MM
L > 10M	±150MM


REMARK:

- 1.CABLE: UTP CAT.6A CABLE 4P*28AWG JACKET. OD: 3.8±0.2MM.
- 2.CONN.: P1 & P2: 8P8C PLUG, 50U GOLD PLATED.
- 3.JACKET: PVC.
- 4.CABLE ASS'Y MUST PASS FLUK PATCH CORD TEST 100%.
- 5.PACKING: EACH CABLE IN POLY-BAG.

WIRE CONNECTION

COLOR(568B)	P1	PAIRS	P2
WHITE/ORANGE	1	————	1
ORANGE	2	————	2
WHITE/GREEN	3	————	3
BLUE	4	————	4
WHITE/BLUE	5	————	5
GREEN	6	————	6
WHITE/BROWN	7	————	7
BROWN	8	————	8

PACKING

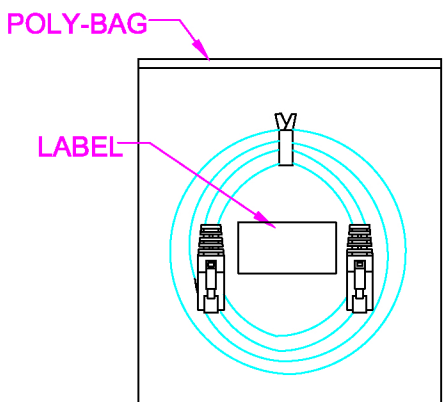

TOLERANCE			INCHES		M/M		LYNN				
.X	.015	.30	SCALE	NONE		REV	A	DWG NO.			
.XX	.010	.10	UNIT	MM							
.XXX	.005	.05	SHEET	1/1	TITLE 8P8C PLUG/8P8C PLUG						
DRAWN BY			DATE	PART NO.							
CHECK BY											
APPD BY											