


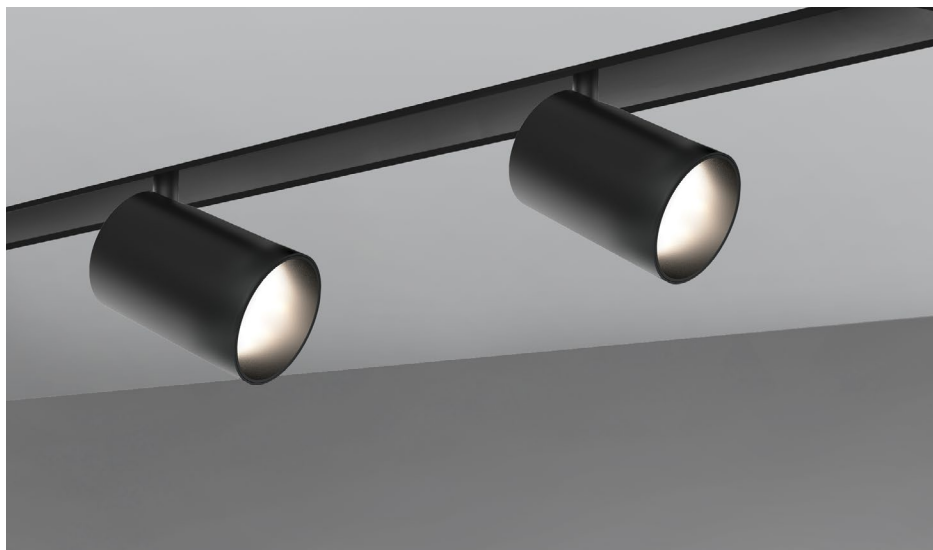

FEATURES

Spot fixtures are a popular choice for controlled, focused accent lighting. Low and high wattage fixtures are available with 3550 rotation and a 900 vertical adjustment. Spot fixtures are solid in construction and have versatile attributes. Construct Spots are a common choice for a range of projects.

SPECIFICATIONS

Light Source:	1 x 13.5 W Integrated LED, COB
Beam Angle:	20°
Kelvin:	*3000K
*For 2700K, 3500K, 4000K please contact sales@eurofase.com	
Initial Lumens:	1207 Lm
Delivered Lumens:	659 Lm
CRI:	90+
Dimming:	TRIAC/0-10V
Color:	Black/White
Input:	24V DC (Remote Driver required)
Vertical Rotation:	90°
Horizontal Rotation:	355°
Dimension:	2.52"DIA x 1.30"W x 6.14"H
Approval:	Indoor use

Electrical Approval:    COMPLIANT

Warranty: 

ORDERING OPTIONS




Black
35764-01




White
35764-02

DIAGRAM



PHOTOMETRICS

H(m)	D(m)	E(lx)
20°		
1.0	0.34	1834
2.0	0.68	458
3.0	1.02	203
4.0	1.37	114
5.0	1.71	73




1 m = 3.28 ft
1 lx = 0.09 fc

COMPATIBLE CHANNELS

SURFACE MOUNT




TRIM RECESSED



PENDANT



TRIMLESS RECESSED



COMPATIBLE DRIVERS



30264-014
TRIAC dimming



44912-017
0-10V dimming